

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: gG / gPV / 10.3 x 85, nom. voltage: 1500 V DC, nominal current: 32 A, connection method: Screw connection, Rated cross section: 16 mm<sup>2</sup>, cross section: 2.5 mm<sup>2</sup>- 25 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: black

## Your advantages

- For 10 x 85 gPV fuse-links in accordance with IEC 60269-6
- Fuse holder for fusing PV strings 1500 V DC
- Easy to bridge

## Commercial data

Item number	1069842
Packing unit	1 pc
Minimum order quantity	12 pc
Sales key	BE12
Product key	BE1234
Catalog page	Page 504 (C-1-2019)
GTIN	4055626747903
Weight per piece (including packing)	84.325 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85354000
Country of origin	CN

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## Technical data

### Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	6 W
Fuse	gG / gPV / 10.3 x 85

### Connection data

Number of connections per level	2
Nominal cross section	25 mm <sup>2</sup>

### Level 1 above 1 below 1

Screw thread	M5
Tightening torque	... 2.5 Nm
Stripping length	14 mm
Internal cylindrical gage	A7
Connection in acc. with standard	IEC 60269-1 / -2
Conductor cross section rigid	2.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>
Cross section AWG	14 ... 4 (converted acc. to IEC)
Conductor cross section flexible	2.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	14 ... 4 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	2.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	2.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
2 conductors with same cross section, solid	0.75 mm <sup>2</sup> ... 10 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.75 mm <sup>2</sup> ... 10 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.75 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Nominal current	32 A (the current and voltage are determined by the fuse)
Maximum load current	32 A (the current and voltage are determined by the fuse)
Nominal voltage	1500 V DC
Nominal cross section	16 mm <sup>2</sup>
Connection in acc. with standard	IEC 60947-1 / -3

### Dimensions

Width	23 mm
-------	-------

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

Height	130 mm
Depth on NS 35/7,5	65.5 mm
Depth on NS 35/15	73 mm

## Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60269-1 / -2
	IEC 60947-1 / -3

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# UK 10,3-HESI A 1500V - Fuse modular terminal block




1069842

<https://www.phoenixcontact.com/us/products/1069842>

## Drawings

Circuit diagram

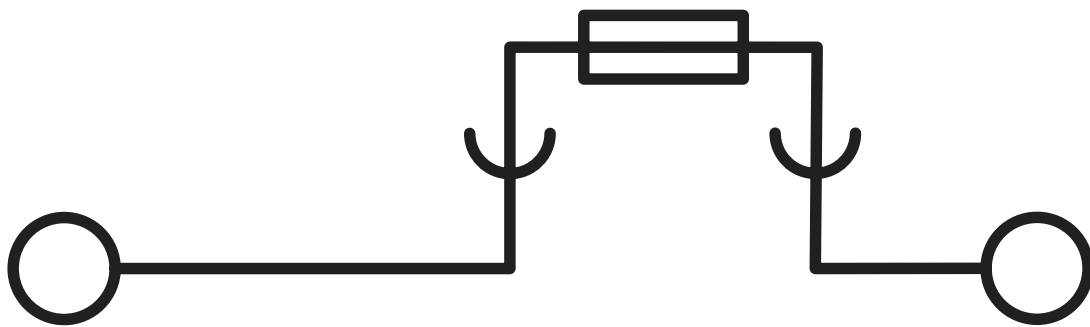

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1069842>



**EAC**

Approval ID: RU C-DE.BL08.B.00534



**UL Listed**

Approval ID: FILE E 353282

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	1500 V	32 A	-	-



**CSA**

Approval ID: 274201

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	1500 V	32 A	-	-



**TÜV Rheinland**

Approval ID: R 50427401

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## Classifications

### ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

### ETIM

ETIM 8.0	EC000899
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## Accessories

### SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

---

### FUSE 10,3X85 2A PV - Fuse

3062766

<https://www.phoenixcontact.com/us/products/3062766>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic



# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## FUSE 10,3X85 4A PV - Fuse

3062767

<https://www.phoenixcontact.com/us/products/3062767>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

---

## FUSE 10,3X85 6A PV - Fuse

3062768

<https://www.phoenixcontact.com/us/products/3062768>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## FUSE 10,3X85 8A PV - Fuse

3062769

<https://www.phoenixcontact.com/us/products/3062769>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

---

## FUSE 10,3X85 10A PV - Fuse

3062770

<https://www.phoenixcontact.com/us/products/3062770>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## FUSE 10,3X85 12A PV - Fuse

3062771

<https://www.phoenixcontact.com/us/products/3062771>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

---

## FUSE 10,3X85 16A PV - Fuse

3062772

<https://www.phoenixcontact.com/us/products/3062772>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## FUSE 10,3X85 20A PV - Fuse

3062773

<https://www.phoenixcontact.com/us/products/3062773>



Fuse, 10.3 mm x 85 mm, up to 1500 V DC, gPV characteristic

---

## FUSE 10,3X85 25A PV - Fuse

3062774

<https://www.phoenixcontact.com/us/products/3062774>



Fuse, 10.3 mm x 85 mm, up to 1200 V DC, gPV characteristic

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## TPN-UK - Partition plate

3003062

<https://www.phoenixcontact.com/us/products/3003062>

Partition plate, length: 110 mm, width: 2 mm, height: 110 mm, color: gray



---

## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>

Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

---

## CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# UK 10,3-HESI A 1500V - Fuse modular terminal block



1069842

<https://www.phoenixcontact.com/us/products/1069842>

## CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)