



APPLICATIONS

Energy efficient LED Flat Square Retrofit kit provides quick and easy installation with no can required. Durable powder-coated diecast trim with enclosed J-box is attached with a water-tight connection. Pre-installed plastic clips included.

FEATURES

- 120V Dimmer standard, 50/60Hz.
- Dimmable down to 5% with most market dimmers.
- Use for recessed applications with drywall or drop tile ceilings (no recessed can needed).
- Small, lightweight J-box standard.
- Long life, 50,000 hour LEDs.
- -30°C ~ 40°C (-22°F ~ 104°F) operating temperature.
- Standards for damp locations and insulated ceilings (IC-rated).

Water-Tight Connector

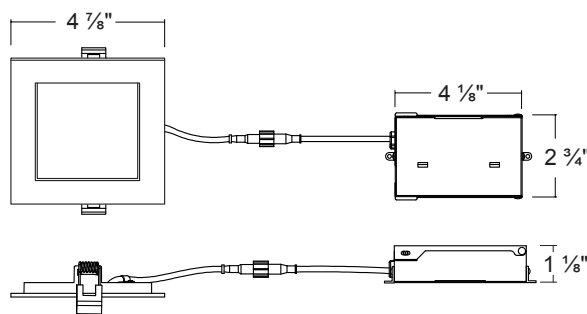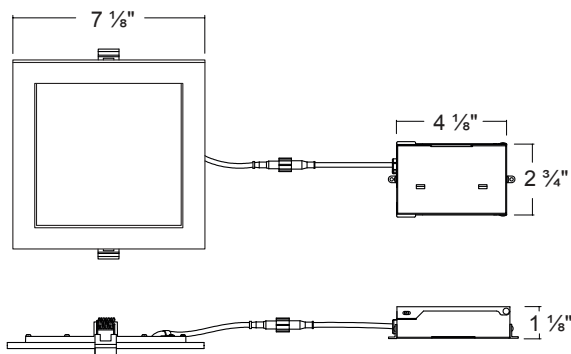

PRODUCT PARAMETERS

MODEL	DESCRIPTION	WATT	LUMENS	COLOR TEMP	CRI	ENERGY STAR®
CLSFP4-1130	4" LED Flat Square Retrofit Kit	11	530	3000K	≥80 or ≥90	YES
CLSFP4-1140	4" LED Flat Square Retrofit Kit	11	530	4000K	≥80 or ≥90	YES
CLSFP4-1150	4" LED Flat Square Retrofit Kit	11	530	5000K	≥80 or ≥90	YES
CLSFP6-1630	6" LED Flat Square Retrofit Kit	16	1030	3000K	≥80 or ≥90	YES
CLSFP6-1640	6" LED Flat Square Retrofit Kit	16	1030	4000K	≥80 or ≥90	YES
CLSFP6-1650	6" LED Flat Square Retrofit Kit	16	1030	5000K	≥80 or ≥90	YES