


3-phase 5 A

PULS

SL5.300

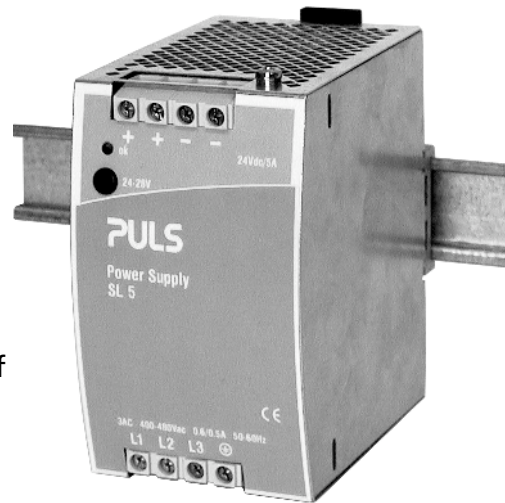

EMV und
Nied.-Spg.
Richtlinie



UL60950 E137006
CUL/CSA-C22.2
No. 60950



UL508 LISTED
IND. CONT. EQ.
18 WIM, 60°C



Data sheet

- Input: 3 AC 400–500 V
- Output: 24...28V / 120 W
- Power boost up to 144 W
- High overload current, no switch-off
- 3 phase wide range input
- Robust mechanics and EMC

Input

Input voltage	3 AC 400–500 V, $\pm 15\%$ 47-63 Hz, suitable for IT power systems
Rated tolerances	(at 24V/5A)
• Continuous operat.	340...576 V AC resp. 450...820 V DC
• Short term (1 min.)	300...620 V AC resp. 420...890 V DC
Even if one phase fails, the unit's operation with nominal current can be continued (limitations: EN 61000-3-2 (harmonic current emissions) is then not fulfilled, the unit has noise suppression level A instead of level B and the hold-up time is shorter). Continued operat. with two phases is also permissible; however, it reduces the unit's reliability and lifetime.	
Input current	3 x 0.5 A
Inrush current	typ. <25A at 575 V AC and cold-start
To be fused with a 3 x 10A, B-type 'circuit-breaker' switch based on the usual thermomagnetic overload sensing principle (used anyway to fuse the input lines; unit has no internal fuses).	
Harmonic current emissions (PFC)	acc. to EN 61000-3-2
Hold-up time	>16 ms (3 phase op. at 400 VAC, 24 V / 5 A) >10 ms (2 phase op. at 400 VAC, 24 V / 5 A)

Efficiency, Reliability etc.*

Efficiency	typ. 89% (3 AC 400V, 24 V / 5 A)
Losses	typ. 15 W (3 AC 400V, 24 V / 5 A)
MTBF	410.000 h acc. to Siemensnorm 29500 (24 V/5 A, 3 AC 400V, $T_U = 40^\circ\text{C}$)
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2).

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet (mechanical design equals that of the SL20.100).

Start / Overload Behaviour

Startup delay	typ. 0.1 s
Rise time	ca. 5-20 ms, depending on load

Overload Behaviour

- Special PULS Overload Design (see diagram overleaf) no disconnection, no hiccup if overloaded high overload current (up to typ. 2 · I_{Nom}), V_{out} is reduced with increasing current.
- 20% power boost 6 A short-term, at 45°C or forced cooling even continuous

Advantages:

- High short-circuit current, giving large 'start-up window': unit starts reliably even with awkward loads such as DC-DC converters.
- Secondary fuses operate more reliably

Output

Output voltage	24...28 V DC, adjustable by (covered) front panel potentiometer, preset: 24.5 V $\pm 0.5\%$ Adjusting range guaranteed			
Output noise suppression	EN 61000-6-3 (class B) is fulfilled even when using long, unscreened output cables			
Ambient temperature range T_{amb}	Operation: $-10^\circ\text{C}...+70^\circ\text{C}$ (>60°C: Derating) Storage: $-25^\circ\text{C}...+85^\circ\text{C}$			
Rated continuous loading with convection cooling	Input	T_{amb}	I_{out} @ 24V	I_{out} @ 28V
	3-phase	$-10^\circ\text{C}...+60^\circ\text{C}$	5 A	4,3 A
		$-10^\circ\text{C}...+45^\circ\text{C}$	6 A*	5,1 A*
	2-phase DC in	$-10...+60$	5 A	4,3 A
$-10^\circ\text{C}...+45^\circ\text{C}$		6 A*	5,1 A*	
Output is protected against short-circuit, open circuit and overload	* * short-term (< 1 min) or with forced air-cooling also at 60°C admissible			
Derating	typ. 6W/K (at $T_{amb}=+60^\circ\text{C}...+70^\circ\text{C}$)			
Voltage regulation	better than 2% V_{out} overall			
Ripple / Noise	< 25 mV _{pp} , (20 MHz bandw., 50 Ω measurem.)			
Overvolt. protection	typ. 33 V			
Serial connection	not allowed			
Parallel operation	yes; current sharing available on request			
Power back immunity	34 V; inapplicable for inductive loads			
Front panel indicator	green LED off, at $V_{out}<20V$			

Construction / Mechanics

Housing dimensions and Weight

- W x H x D 73 mm x 124 mm x 117 mm (+ DIN rail)
- Free space for ventilation above/below 50 mm recommended left/right 15 mm recommended
- Weight 730 g

Design advantages:


- All connection blocks are easy to reach as mounted at the front panel.
- Input and output are strictly apart from each other and so cannot be mixed up (Input below, output above).

* For further information see data sheets "the SilverLine", "SilverLine Family Branches" and mechanics data sheet


Order information

Order number	Description
SL5.300	
SLZ01	Screw mounting set, two needed per unit


Hold-up time, 3-phase (min., at $V_{out}=24V$)

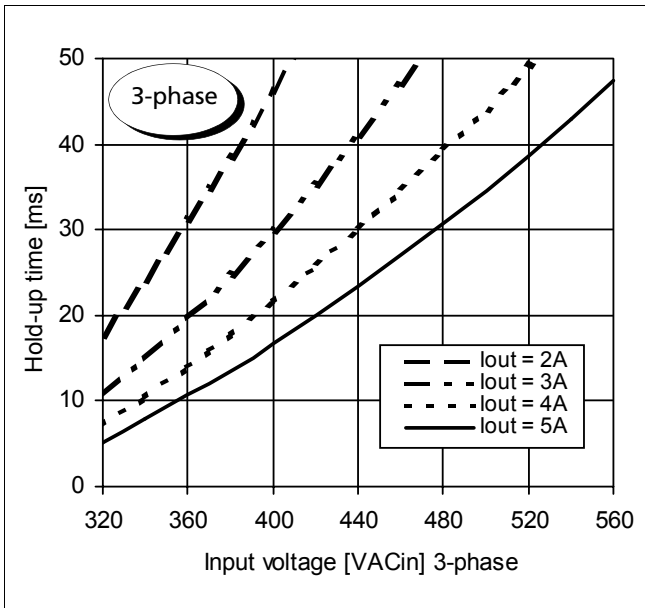


Output characteristic (min.)

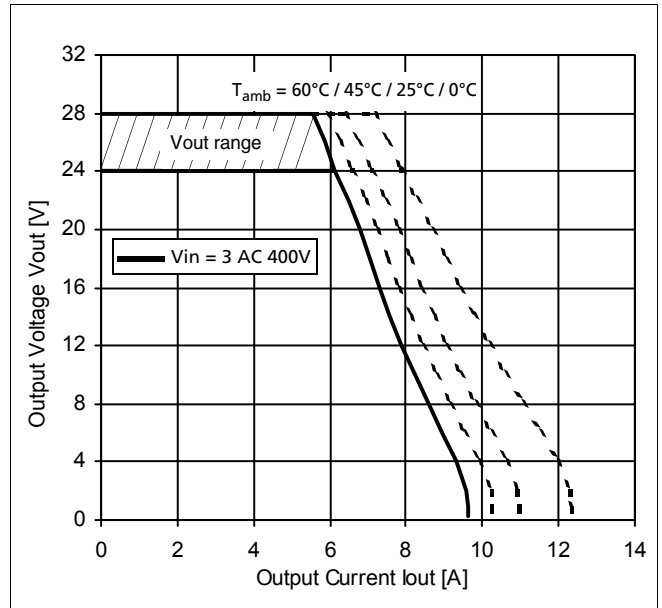

Hold-up time, 2-phase (min., at $V_{out}=24V$)

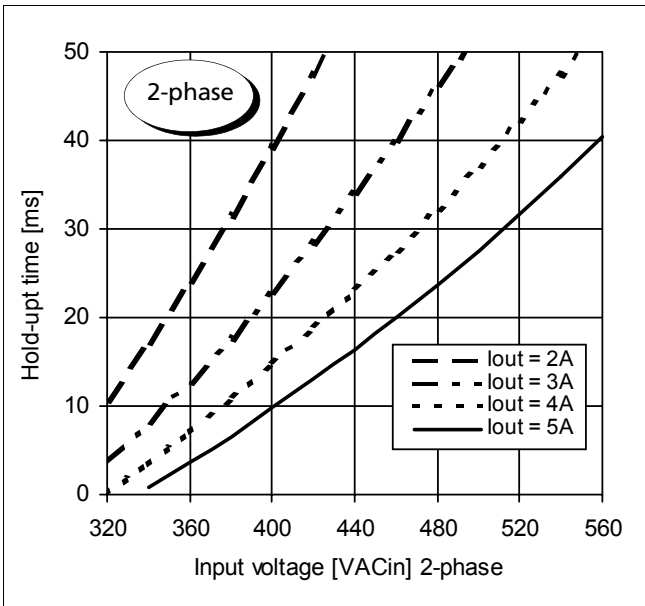

Efficiency (typ., at $V_{out}=24V$)

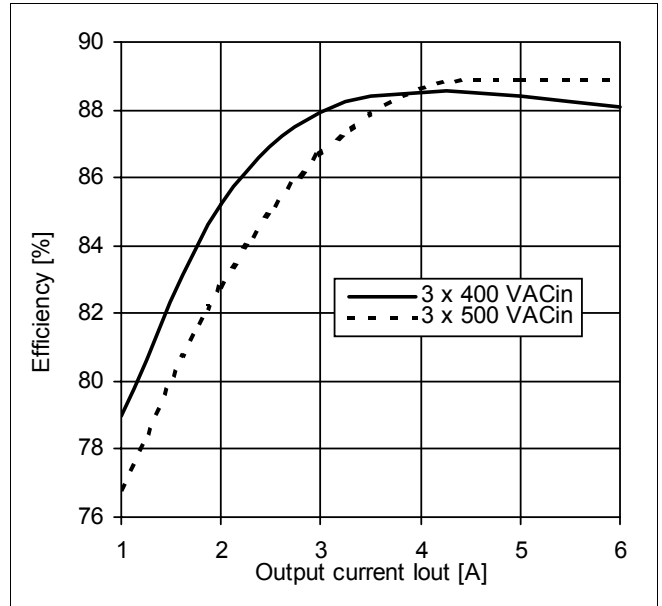

For further information, especially about

- EMC
- Connections
- Safety, Approvals
- Mechanics und Mounting,

see page 2 of the „The SilverLine“ data sheet.

For detailed dimensions

see SilverLine mechanics data sheet SL2.5/ SL5/ SL10

Specifications valid for 3AC 400V input voltage, +25°C ambient temperature, and 5 min run-in time, unless otherwise stated. They are subject to change without prior notice.

Your partner in power supply:



Bayerns Best 50
Czech 100 Best
EuropeOs 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com


SL2.5/ SL5/ SL10

- Innovative DIN-Rail mount, unit holds even at vibration or lateral pressure
- Clearly arranged and user oriented
- Large, robust screw terminals
- Sealed metal housing
- Fine ventilating grid




Data sheet


Side view SL2.5

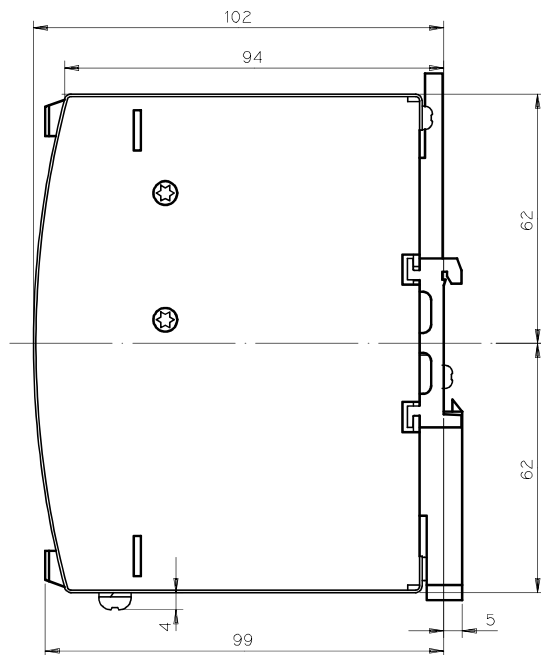

Front view SL2.5

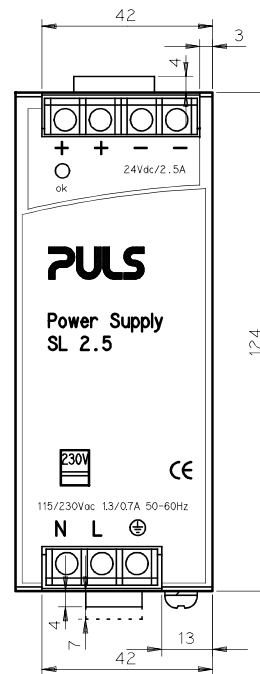

Bottom view SL2.5

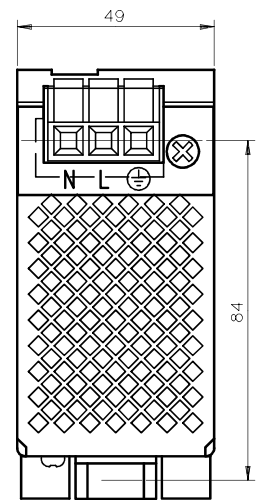

Construction / Mechanics

Unit	Housing dimensions and Weight		Free space for ventilation		
	W x H x D [mm]	weight	left	above/below	right
• SL2.5	49 x 124 x 102	460 g	0 mm	25 mm each	10 mm
• SL5.10x	64 x 124 x 102	620 g	15 mm	25 mm each	15 mm
• SL5.300	73 x 124 x 117	730 g	15 mm	50 mm each	15 mm
• SL10	120 x 124 x 102	980 g	15 mm	25 mm each	15 mm

Overall depth = depth value as mentioned + DIN rail depth

Robust metal housing with fine ventilat. grid (◇ 3,5 mm, IP20), to keep out small parts (e.g. screws)

Mounting on DIN-Rail (TS35/7.5 or TS35/15, 1...1.5 mm thick), thus

- Simple snap-on system
- Sits safely and firmly on the DIN-Rail
- No tools required to remove

or backplane-mounted (two optional screw mounting sets SLZ01 required)

Connections

Connections

- Input/Output
- Current handling capacity
- Grid


Screw terminals, connector size range: solid 0.5- 6 mm² / flexible 0.5- 4 mm²
30 A per output
Two connectors per output, 9 mm distance between adjacent connectors

Design advantages:



- All connection blocks are easy to reach as mounted at the the front panel.
- Input and output are strictly apart from each other and so cannot be mixed up

Order information



Order number	Description
SL2.100	24V/2.5A
SL2.103	12-15V/40W
SL5.100	24V/5A
SL5.102	24-28V/120W
SL5.105	24-28V/120W
SL5.300	24-28V/120W, 3AC400-500V input
SL10.100 and SL10.105	24-28V/240W
SL10.101	48-56V/240W
SLZ01	Screw mounting set, two needed per unit

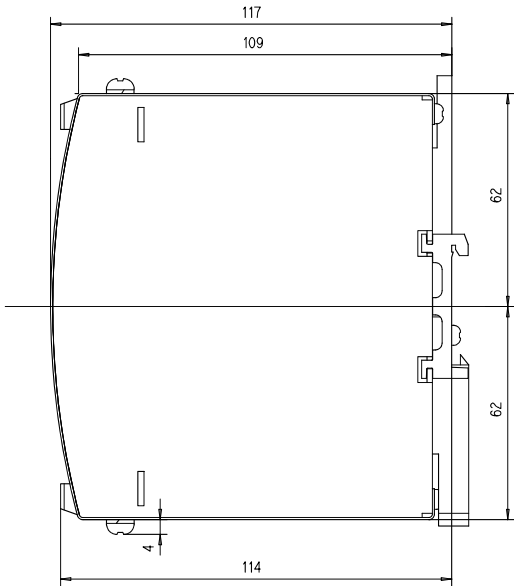




All views SL5.300

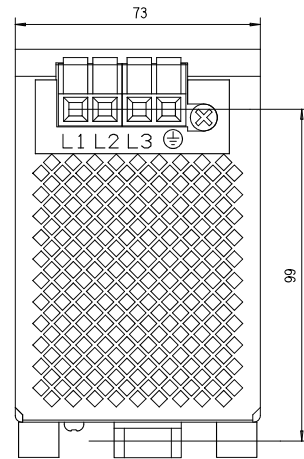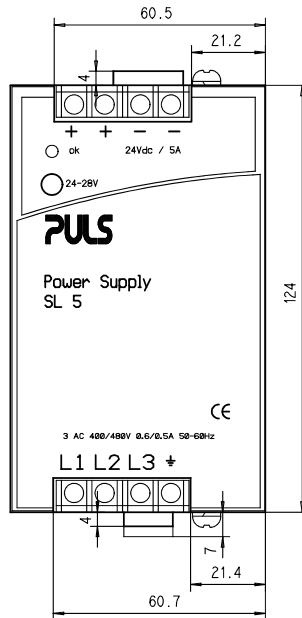

**Bottom view
SL10 SL5.10x**

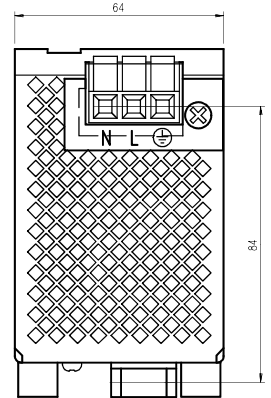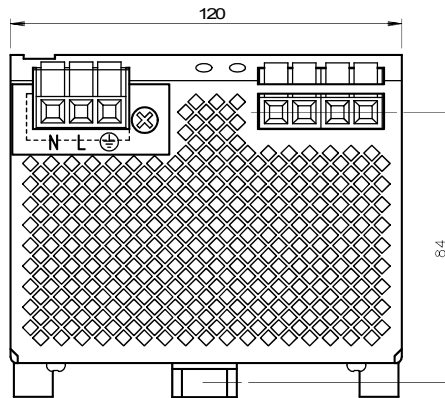

**Side view and front view
SL10, SL5.10x**

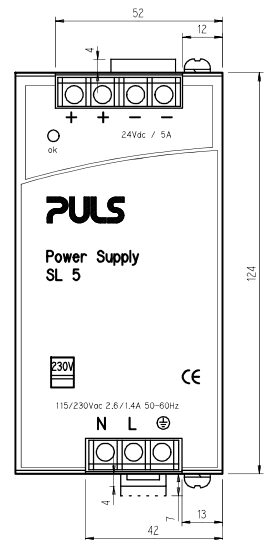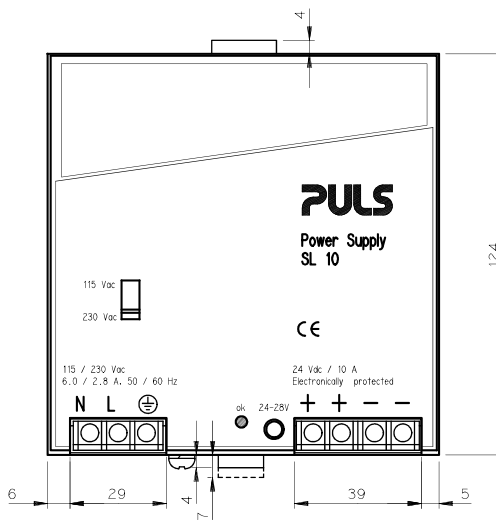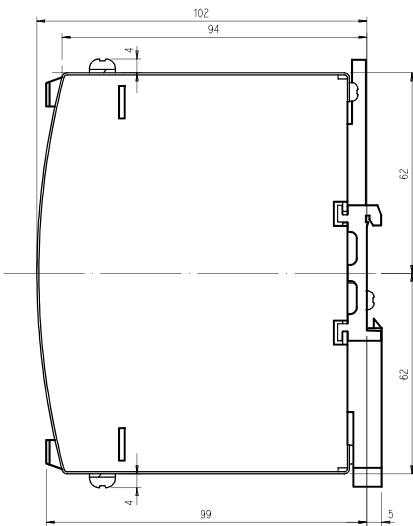

This 'mechanics data sheet' exclusively deals with the mechanical properties of the product. For further information (especially concerning electrical properties), please refer to the generic data sheet of the SL2.5, SL5 and SL10 and to the basic data sheet „The SilverLine“ dealing with common features of all SilverLine units. This data sheet is subject to change without prior notice.

Your partner in power supply:



Bayerns Best 50
Czech 100 Best
EuropeOs 500

PULS GmbH
Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com