


INVERTER GRADE THYRISTORS

Stud Version

Features

- All diffused design
- Center amplifying gate
- Guaranteed high dv/dt
- Guaranteed high di/dt
- High surge current capability
- Low thermal impedance
- High speed performance




Typical Applications

- Inverters
- Choppers
- Induction heating
- All types of force-commutated converters

Major Ratings and Characteristics

| Parameters | ST103S | Units |
|-------------------|-------------|----------------------|
| $I_{T(AV)}$ | 105 | A |
| | @ T_C | 85 °C |
| $I_{T(RMS)}$ | 165 | A |
| I_{TSM} | @ 50Hz | 3000 A |
| | @ 60Hz | 3150 A |
| I^2t | @ 50Hz | 45 KA ² s |
| | @ 60Hz | 41 KA ² s |
| V_{DRM}/V_{RRM} | 400 to 800 | V |
| t_q range | 10 to 25 | μs |
| T_J | - 40 to 125 | °C |

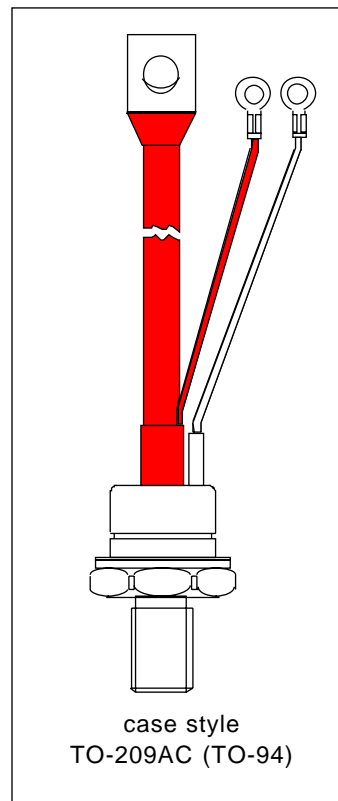

ST103S Series

Bulletin I25183 rev. B 03/94




International
 TOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

| Type number | Voltage Code | V_{DRM}/V_{RRM} , maximum repetitive peak voltage V | V_{RSM} , maximum non-repetitive peak voltage V | I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max. mA |
|-------------|--------------|--|--|--|
| ST103S | 04 | 400 | 500 | 30 |
| | 08 | 800 | 900 | |

Current Carrying Capability

| Frequency |  | |  | |  | | Units |
|----------------------------------|---|----------|---|----------|---|----------|-------|
| | I_{TM} | I_{TM} | I_{TM} | I_{TM} | I_{TM} | I_{TM} | |
| 50Hz | 280 | 180 | 440 | 330 | 4730 | 3630 | A |
| 400Hz | 310 | 200 | 470 | 300 | 2500 | 1850 | |
| 1000Hz | 320 | 200 | 480 | 310 | 1530 | 1090 | |
| 2500Hz | 340 | 210 | 490 | 320 | 840 | 580 | |
| Recovery voltage Vr | 50 | 50 | 50 | 50 | 50 | 50 | V |
| Voltage before turn-on Vd | V_{DRM} | | V_{DRM} | | V_{DRM} | | |
| Rise of on-state current di/dt | 50 | 50 | - | - | - | - | A/µs |
| Case temperature | 60 | 85 | 60 | 85 | 60 | 85 | °C |
| Equivalent values for RC circuit | 22Ω / 0.15µF | | 22Ω / 0.15µF | | 22Ω / 0.15µF | | |

On-state Conduction

| Parameter | ST103S | Units | Conditions | |
|---|--------|--------------------|--|-----------------------|
| $I_{T(AV)}$ Max. average on-state current @ Case temperature | 105 | A | 180° conduction, half sine wave | |
| | 85 | °C | | |
| $I_{T(RMS)}$ Max. RMS on-state current | 165 | A | DC @ 76°C case temperature | |
| I_{TSM} Max. peak, one half cycle, non-repetitive surge current | 3000 | | t = 10ms | No voltage reappplied |
| | 3150 | | t = 8.3ms | reappplied |
| | 2530 | | t = 10ms | 100% V_{RRM} |
| | 2650 | | t = 8.3ms | reappplied |
| I^2t Maximum I^2t for fusing | 45 | | KA ² s | t = 10ms |
| | 41 | | | t = 8.3ms |
| | 32 | | | t = 10ms |
| | 29 | t = 8.3ms | | |
| $I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing | 450 | KA ² √s | t = 0.1 to 10ms, no voltage reappplied | |

On-state Conduction

| Parameter | ST103S | Units | Conditions |
|---|--------|------------|---|
| V_{TM} Max. peak on-state voltage | 1.73 | V | $I_{TM} = 300A$, $T_J = T_J \text{ max}$, $t_p = 10\text{ms}$ sine wave pulse |
| $V_{T(TO)1}$ Low level value of threshold voltage | 1.32 | | $(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$. |
| $V_{T(TO)2}$ High level value of threshold voltage | 1.35 | | $(I > \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$. |
| r_{t1} Low level value of forward slope resistance | 1.40 | m Ω | $(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$. |
| r_{t2} High level value of forward slope resistance | 1.30 | | $(I > \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$. |
| I_H Maximum holding current | 600 | mA | $T_J = 25^\circ\text{C}$, $I_T > 30A$ |
| I_L Typical latching current | 1000 | | $T_J = 25^\circ\text{C}$, $V_A = 12V$, $R_a = 6\Omega$, $I_G = 1A$ |

Switching

| Parameter | ST103S | Units | Conditions |
|---|------------------|------------------|--|
| di/dt Max. non-repetitive rate of rise of turned-on current | 1000 | A/ μs | $T_J = T_J \text{ max}$, $V_{DRM} = \text{rated } V_{DRM}$ $I_{TM} = 2 \times \text{di/dt}$ |
| t_d Typical delay time | 0.80 | μs | $T_J = 25^\circ\text{C}$, $V_{DM} = \text{rated } V_{DRM}$, $I_{TM} = 50A \text{ DC}$, $t_p = 1\mu\text{s}$ Resistive load, Gate pulse: 10V, 5 Ω source |
| t_q Max. turn-off time | Min 10 Max 25 | | $T_J = T_J \text{ max}$, $I_{TM} = 100A$, commutating di/dt = 10A/ μs $V_R = 50V$, $t_p = 200\mu\text{s}$, dv/dt: see table in device code |

Blocking

| Parameter | ST103S | Units | Conditions |
|--|--------|------------------|--|
| dv/dt Maximum critical rate of rise of off-state voltage | 500 | V/ μs | $T_J = T_J \text{ max}$., linear to 80% V_{DRM} , higher value available on request |
| I_{RRM} I_{DRM} Max. peak reverse and off-state leakage current | 30 | mA | $T_J = T_J \text{ max}$, rated V_{DRM}/V_{RRM} applied |

Triggering

| Parameter | ST103S | Units | Conditions |
|---|--------|-------|--|
| P_{GM} Maximum peak gate power | 40 | W | $T_J = T_J \text{ max}$, $f = 50\text{Hz}$, $d\% = 50$ |
| $P_{G(AV)}$ Maximum average gate power | 5 | | |
| I_{GM} Max. peak positive gate current | 5 | A | $T_J = T_J \text{ max}$, $t_p \leq 5\text{ms}$ |
| $+V_{GM}$ Maximum peak positive gate voltage | 20 | V | $T_J = T_J \text{ max}$, $t_p \leq 5\text{ms}$ |
| $-V_{GM}$ Maximum peak negative gate voltage | 5 | | |
| I_{GT} Max. DC gate current required to trigger | 200 | mA | $T_J = 25^\circ\text{C}$, $V_A = 12V$, $R_a = 6\Omega$ |
| V_{GT} Max. DC gate voltage required to trigger | 3 | | |
| I_{GD} Max DC gate current not to trigger | 20 | mA | $T_J = T_J \text{ max}$, rated V_{DRM} applied |
| V_{GD} Max. DC gate voltage not to trigger | 0.25 | | |

ST103S Series

Bulletin I25183 rev. B 03/94

International
IOR Rectifier

Thermal and Mechanical Specifications

| Parameter | ST103S | Units | Conditions |
|--|------------------|----------------|--|
| T_J Max. junction operating temperature range | -40 to 125 | °C | |
| T_{stg} Max. storage temperature range | -40 to 150 | | |
| R_{thJC} Max. thermal resistance, junction to case | 0.195 | K/W | DC operation |
| R_{thCS} Max. thermal resistance, case to heatsink | 0.08 | | Mounting surface, smooth, flat and greased |
| T Mounting torque, $\pm 10\%$ | 15.5 (137) | Nm (lbf-in) | Non lubricated threads |
| | 14 (120) | Nm (lbf-in) | Lubricated threads |
| wt Approximate weight | 130 | g | |
| Case style | TO-209AC (TO-94) | | See Outline Table |

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

| Conduction angle | Sinusoidal conduction | Rectangular conduction | Units | Conditions |
|------------------|-----------------------|------------------------|-------|--------------------------|
| 180° | 0.034 | 0.025 | K/W | $T_J = T_J \text{ max.}$ |
| 120° | 0.040 | 0.042 | | |
| 90° | 0.052 | 0.056 | | |
| 60° | 0.076 | 0.079 | | |
| 30° | 0.126 | 0.127 | | |

Ordering Information Table

Device Code


| | | | | | | | | |
|----|----|---|---|----|---|---|---|---|
| ST | 10 | 3 | S | 08 | P | F | N | 0 |
| 1 | 2 | - | 3 | 4 | 5 | 6 | 7 | 8 |

R_{RRM} (See Outline Table for details)
 q (est condition)
 dv/dt Eyelet terminals (Gate and Aux. Cathode Leads)
 1 = Fast-on terminals (Gate and Aux. Cathode Leads)
 2 = Flag terminals (For Cathode and Gate Terminals)
 - Critical dv/dt :
 None = 500V/ μ sec (Standard value)
 L = 1000V/ μ sec (Special selection)

| q combinations available | | | | | |
|----------------------------|----|----|-----|-------------|-----|
| dv/dt (V/ μ s) | 20 | 50 | 100 | 200 | 400 |
| 10 | CN | DN | EN | FN * | -- |
| 12 | CM | DM | EM | FM | HM |
| 15 | CL | DL | EL | FL * | HL |
| 18 | CP | DP | EP | FP | HP |
| 20 | CK | DK | EK | FK | HK |
| 25 | -- | -- | -- | -- | HJ |

*Standard part number.
All other types available only on request.

Outline Table

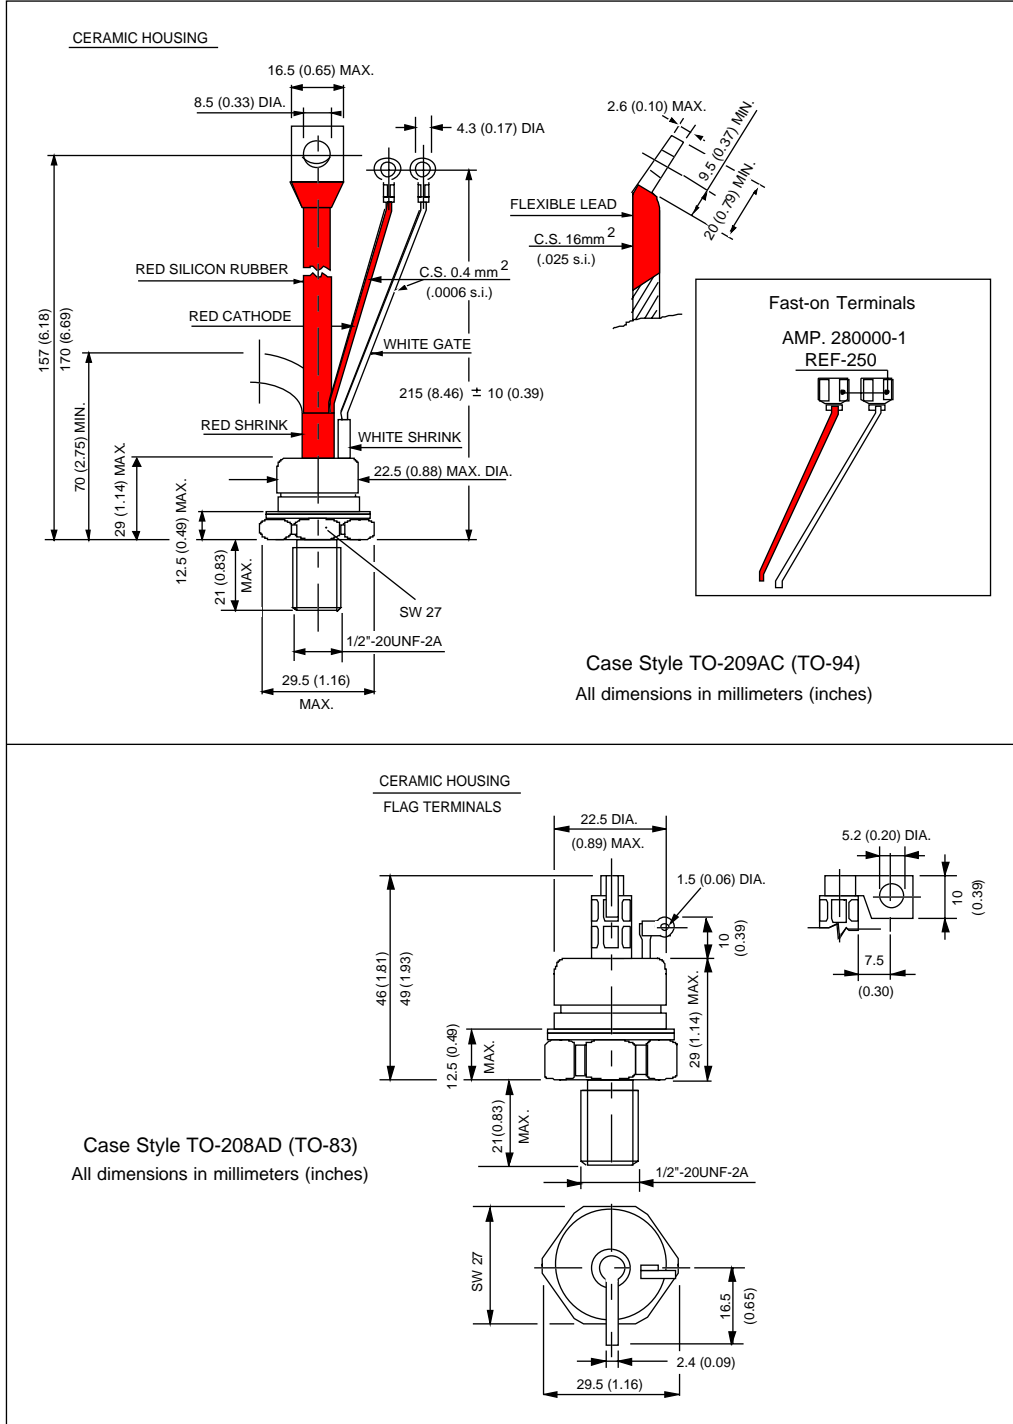

ST103S Series

Bulletin I25183 rev. B 03/94

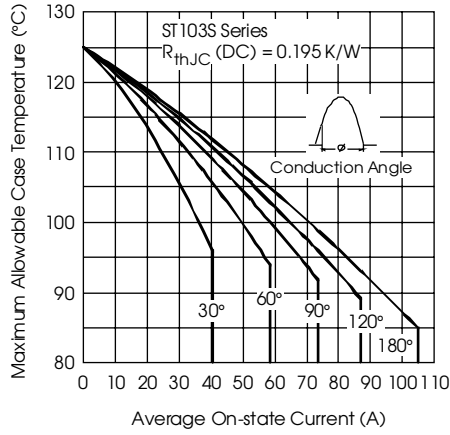


Fig. 1 - Current Ratings Characteristics

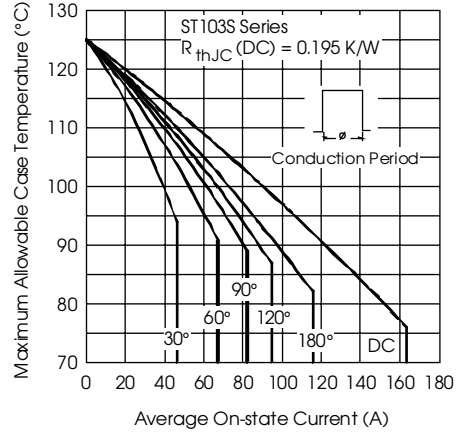


Fig. 2 - Current Ratings Characteristics

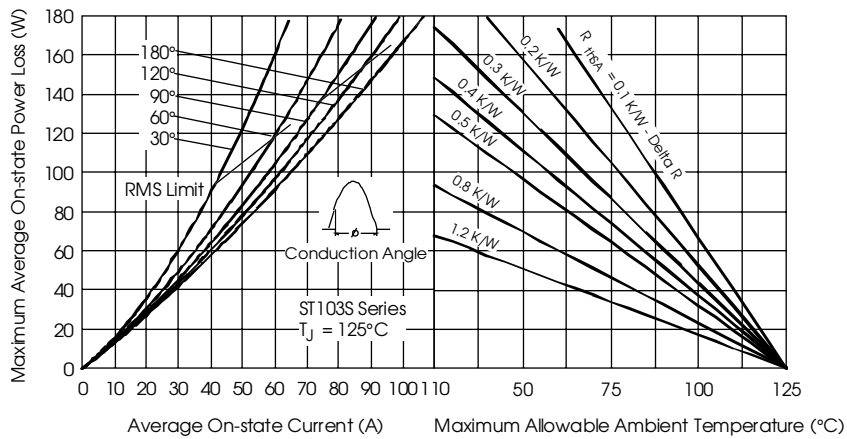


Fig. 3 - On-state Power Loss Characteristics

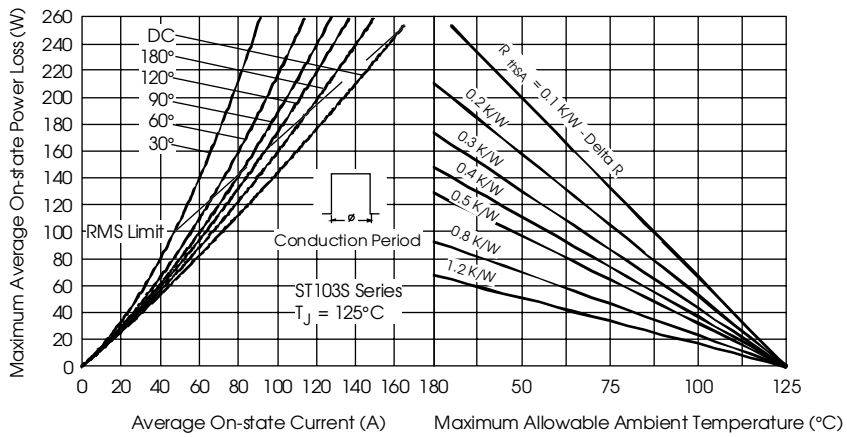


Fig. 4 - On-state Power Loss Characteristics

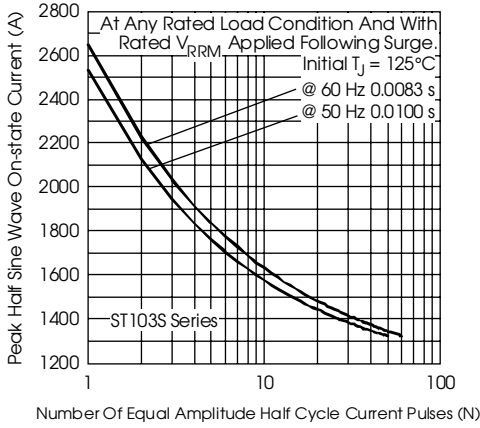


Fig. 5 - Maximum Non-repetitive Surge Current

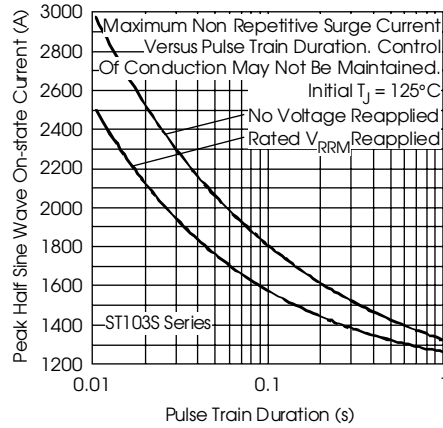


Fig. 6 - Maximum Non-repetitive Surge Current

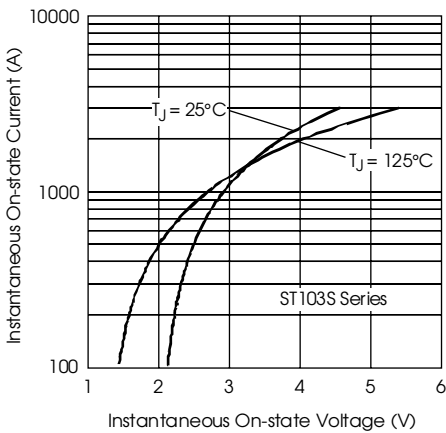


Fig. 7 - On-state Voltage Drop Characteristics

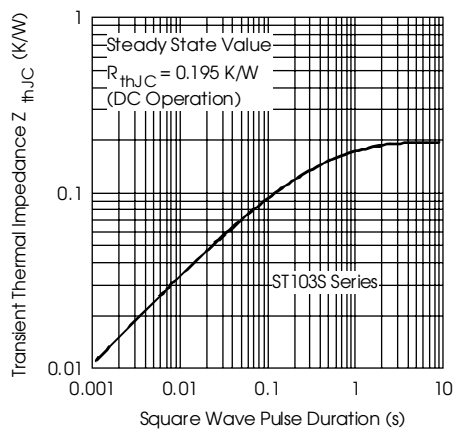


Fig. 8 - Thermal Impedance Z_{thJC} Characteristic

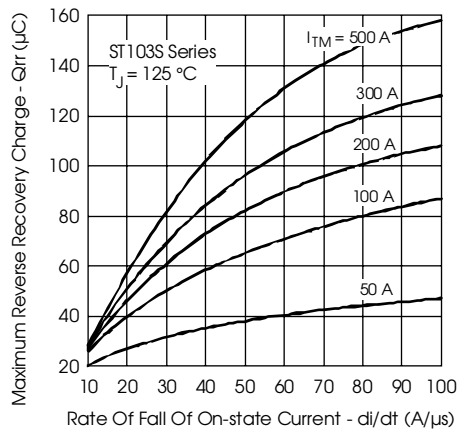


Fig. 9 - Reverse Recovered Charge Characteristics

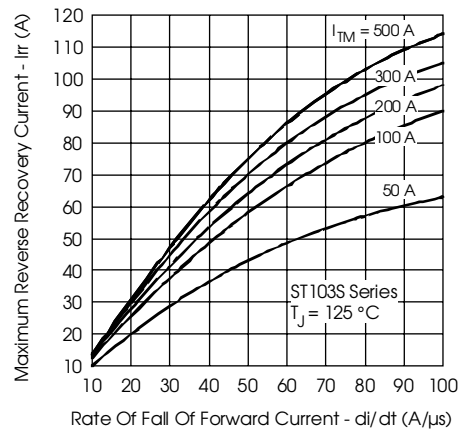


Fig. 10 - Reverse Recovery Current Characteristics

ST103S Series

Bulletin I25183 rev. B 03/94

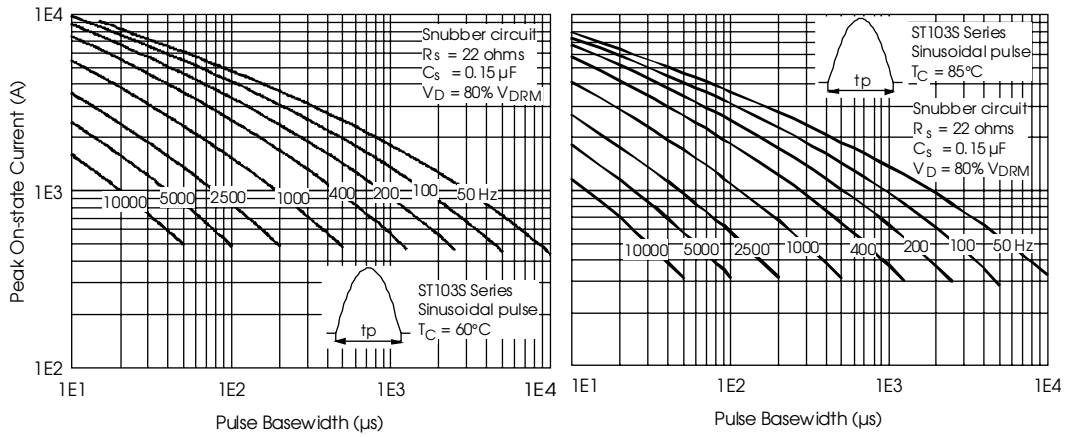


Fig. 11 - Frequency Characteristics

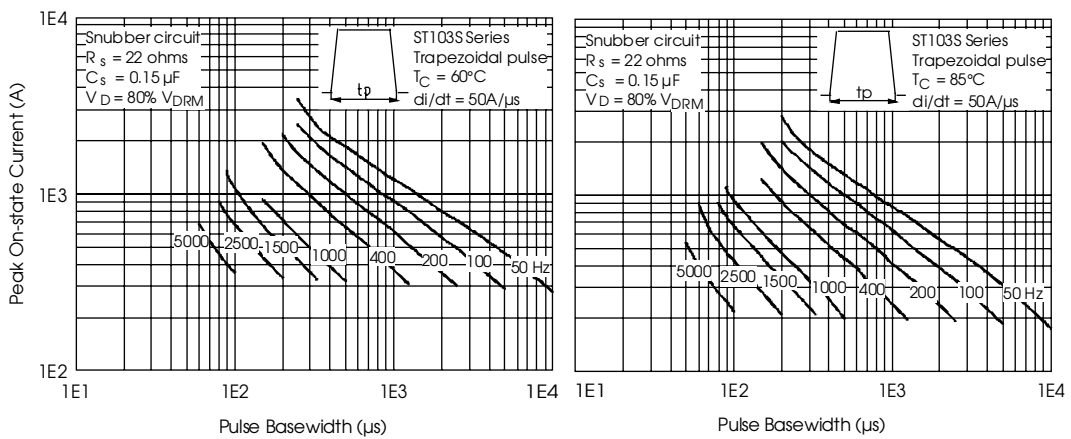


Fig. 12 - Frequency Characteristics

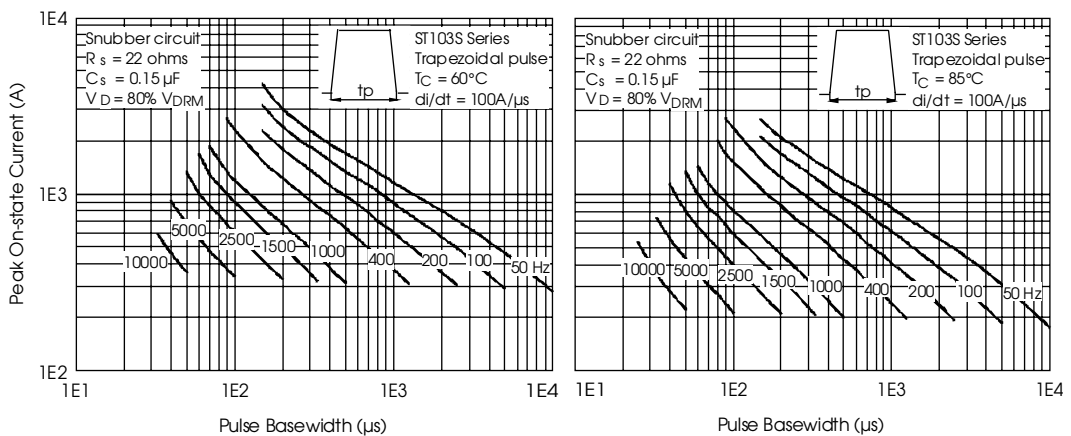


Fig. 13 - Frequency Characteristics

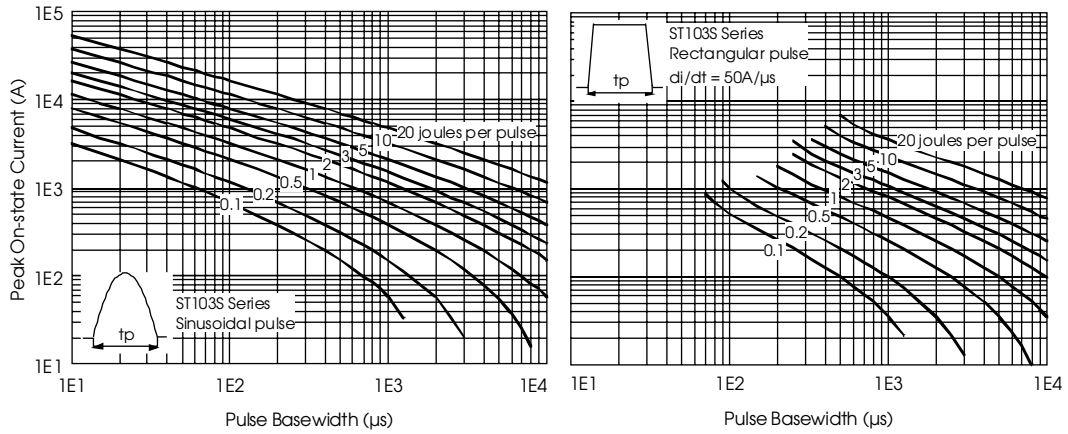


Fig. 14 - Maximum On-state Energy Power Loss Characteristics

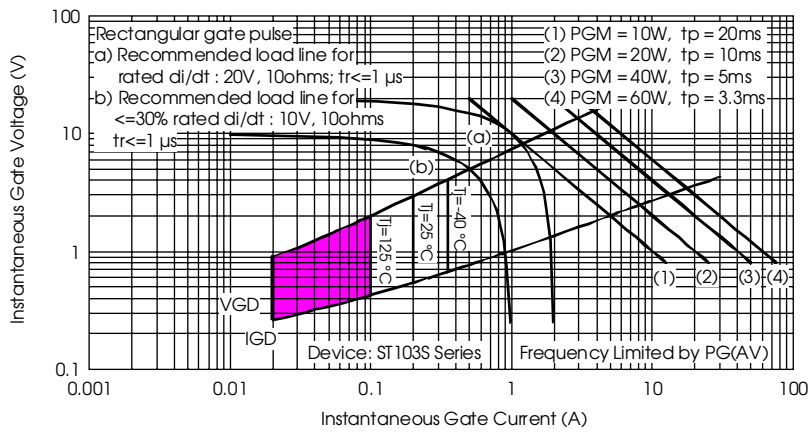


Fig. 15 - Gate Characteristics



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.