
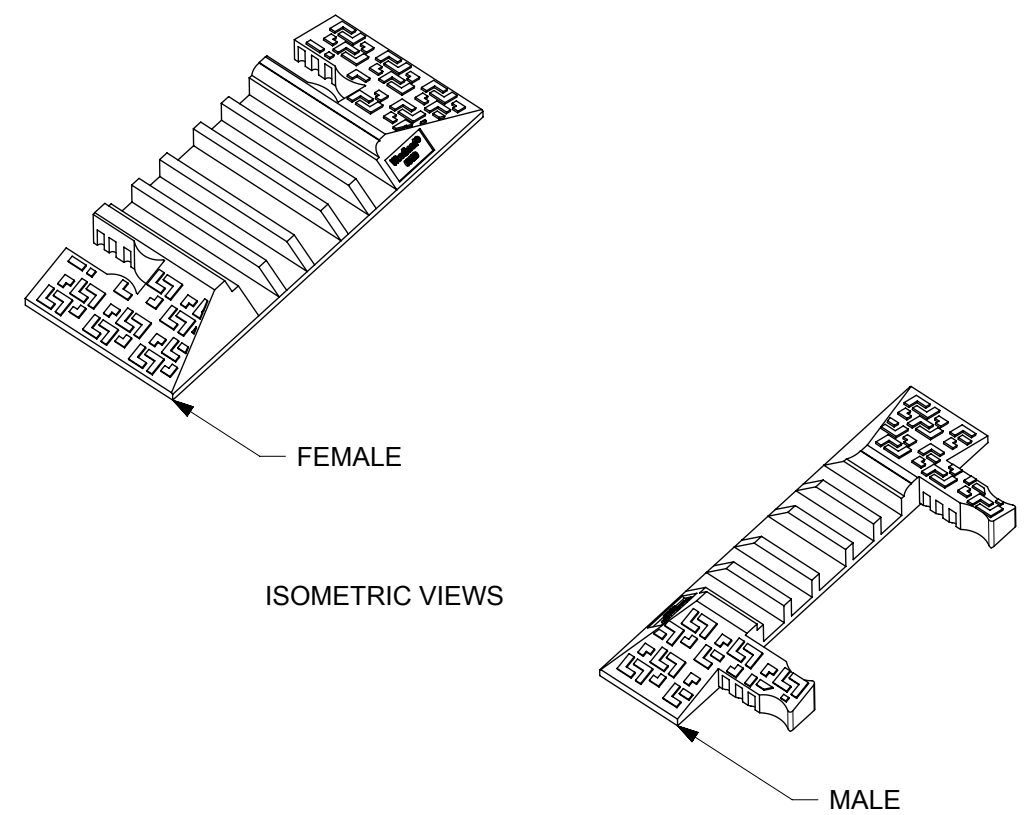
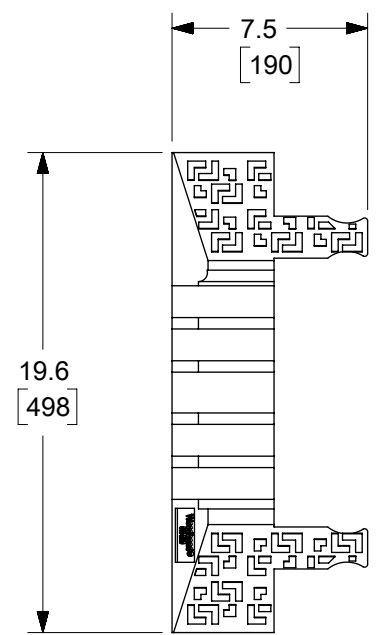


SAME DIMENSIONS FOR BOTH MALE AND FEMALE

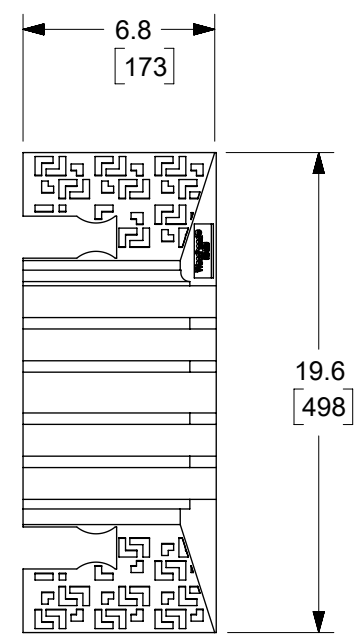

- NOTES:
- 1) MATERIAL: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
COLOR: BLACK
 - 2) WEIGHT:
MALE: 3.5 LBS/ 1.6 KG ±10%
FEMALE: 4.5 LBS/ 2 KG ±10%
 - 3) LOAD CAPACITY PER TIRE/AXLE:
16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
 - 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
 - 5) ENGINEERING NO.: 610-END
 - 6) ROHS COMPLIANT

PENDING APPROVAL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS	SCALE	CURRENT REV DESC: UPDATE NOTE 2							
INCH	1:8								
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 174322			5 CHANNEL END CAPS, MALE & FEMALE SAFEWAY® CABLE PROTECTOR				
ANGULAR TOL ± 3.0°		DRWN: WLEUNG 2018/03/26							
4 PLACES ± 0.25		CHK'D: DNGUYEN62 2018/04/02			PRODUCT CUSTOMER DRAWING				
3 PLACES ± 0.25		APPR:							
2 PLACES ± 0.25		INITIAL REVISION:			DOCUMENT NUMBER: 1301380117 DOC TYPE: PSD DOC PART: 000 REVISION: D				
1 PLACE ± 0.25		DRWN: WLEUNG 2016/04/18							
0 PLACES ± 0.25		APPR: BWOODMAN 2016/04/28			MATERIAL NUMBER: 130138 CUSTOMER:				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES					
			B-SIZE	130138					

DOCUMENT STATUS	RQ	RELEASE DATE
-----------------	----	--------------