

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00				
	K	REVISED PER ECR-20-000814	26MAY2020	PC	SW

D


C

B

A

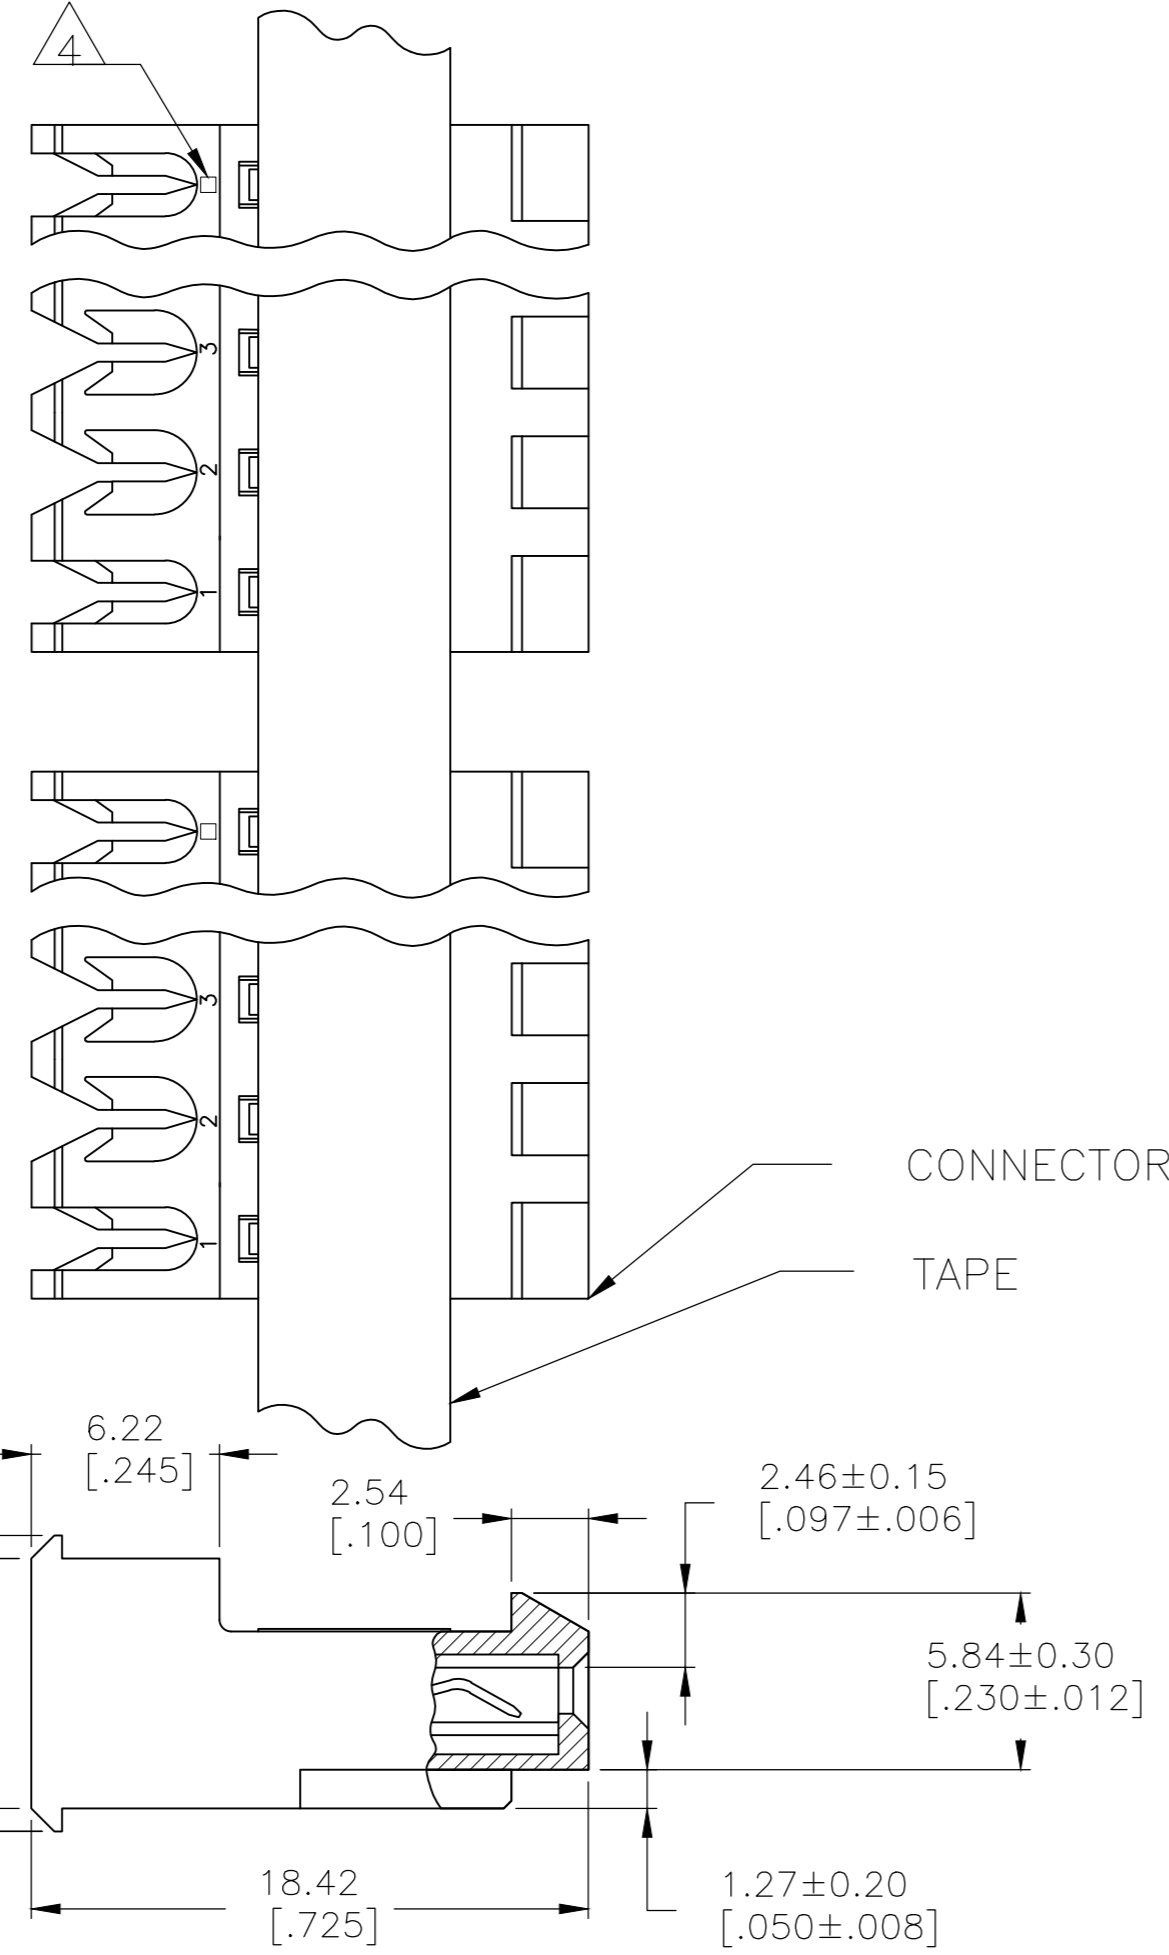

CONNECTOR ASSEMBLY
 TAPE

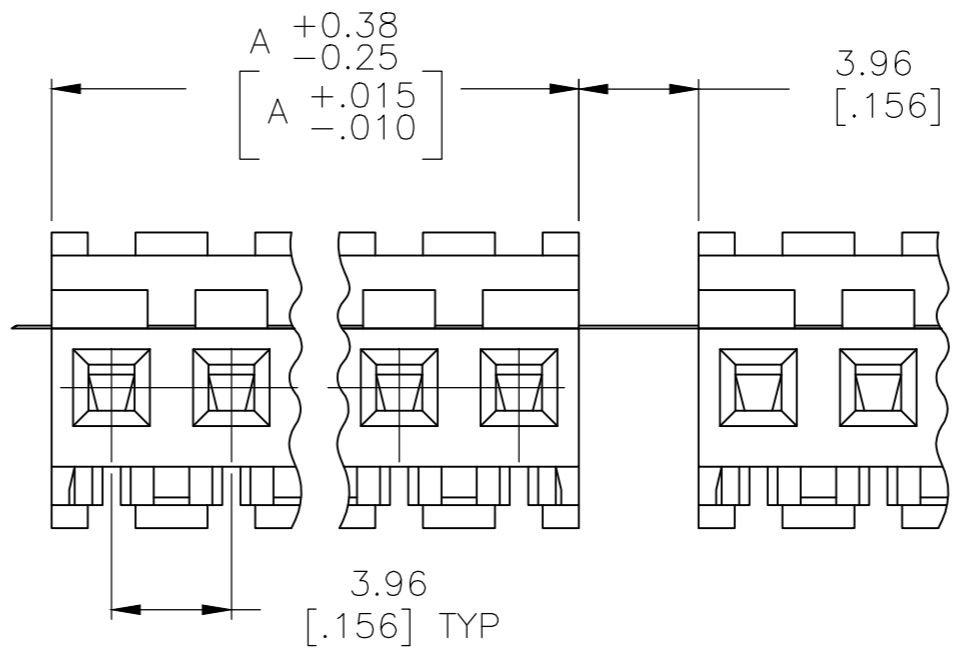

95.10	[3.744]	24	5-641302-4
91.14	[3.588]	23	5-641302-3
87.17	[3.432]	22	5-641302-2
83.21	[3.276]	21	5-641302-1
79.25	[3.120]	20	5-641302-0
75.29	[2.964]	19	4-641302-9
71.32	[2.808]	18	4-641302-8
67.36	[2.652]	17	4-641302-7
63.40	[2.496]	16	4-641302-6
59.44	[2.340]	15	4-641302-5
55.47	[2.184]	14	4-641302-4
51.51	[2.028]	13	4-641302-3
47.55	[1.872]	12	4-641302-2
43.59	[1.716]	11	4-641302-1
39.62	[1.560]	10	4-641302-0
35.66	[1.404]	9	3-641302-9
31.70	[1.248]	8	3-641302-8
27.74	[1.092]	7	3-641302-7
23.77	[.936]	6	3-641302-6
19.81	[.780]	5	3-641302-5
15.85	[.624]	4	3-641302-4
11.89	[.468]	3	3-641302-3
7.92	[.312]	2	3-641302-2
95.10	[3.744]	24	2-641302-4
91.14	[3.588]	23	2-641302-3
87.17	[3.432]	22	2-641302-2
83.21	[3.276]	21	2-641302-1
79.25	[3.120]	20	2-641302-0
75.29	[2.964]	19	1-641302-9
71.32	[2.808]	18	1-641302-8
67.36	[2.652]	17	1-641302-7
63.40	[2.496]	16	1-641302-6
59.44	[2.340]	15	1-641302-5
55.47	[2.184]	14	1-641302-4
51.51	[2.028]	13	1-641302-3
47.55	[1.872]	12	1-641302-2
43.59	[1.716]	11	1-641302-1
39.62	[1.560]	10	1-641302-0
35.66	[1.404]	9	641302-9
31.70	[1.248]	8	641302-8
27.74	[1.092]	7	641302-7
23.77	[.936]	6	641302-6
19.81	[.780]	5	641302-5
15.85	[.624]	4	641302-4
11.89	[.468]	3	641302-3
7.92	[.312]	2	641302-2

SUPERCEDED

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (ORANGE).
 CONTACTS - 0.30[.012] THICK COPPER ALLOY
 BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
 FOR CONTACTS 641302-2 THRU 2-641302-4
 MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN
 THICKNESS OVER NICKEL UNDERPLATE FOR
 3-641302-2 THRU 5-641302-4.
- 2 CONTACTS ACCEPT 18 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12 FEB 91		
DIMENSIONS: mm [INCHES]		CHK R. SWING 12 FEB 91		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. CLARK 20 FEB 91	NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-1051	MTA-156 CONNECTOR ASSEMBLY, 18 AWG, STANDARD TAPE MOUNTED	
MATERIAL		APPLICATION SPEC 114-1020	SIZE A2	CAGE CODE 00779
FINISH		WEIGHT -	DRAWING NO C-641302	RESTRICTED TO -
1		CUSTOMER DRAWING		SCALE 1:1
		SHEET 1 OF 1		REV K