

PART NUMBER	ITEM ① INTERFACE INSERT	ITEM ② BASE	ITEM ③ CONTACT	ITEM 4 INSULATOR
125-2701-811	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN	TEFLON


REV	ECO	DATE	
1	INITIAL RELEASE	130C T 2020	
2	EC-2102004	03FEB2021	

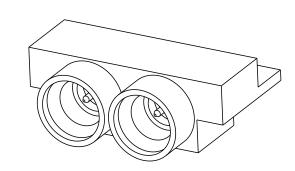

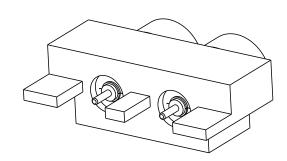

NOTES:

- 1. ELECTRICAL SPECIFICATIONS:
- 1.1 IMPEDANCE: 50 OHMS
- 1.2 FREQUENCY RANGE: DC-65 GHz 1.3 VSWR: 1.35 MAX DC TO 40 GHz
- 1.50 MAX 40 GHz TO 65 GHz
- 1.4 WORKING VOLTAGE: 325 VRMS MAX AT SEA LEVEL
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 325 VRMS MIN AT SEA LEVEL
- 1.6 INSULATION RESISTANCE: 5000 MEGOHM MIN
- 1.7 CONTACT RESISTANCE:
- 1.7.1 CENTER CONTACT INTIAL 6.0 MILLIOHM MAX, AFTER
 - ENVIRONMENTAL NOT APPLICABLE
- 1.7.2 OUTER CONDUCTOR INITIAL 2.0 MILLIOHM MAX, AFTER
 - ENVIRONMENTAL NOT APPLICABLE
- 1.8 INSERTION LOSS: 0.1 √F (GHz) dB MAX
- 2. MECHANICAL SPECIFICATIONS:
- 2.1 ENGAGEMENT FORCE: 2.5 LBS MAX 2.2 DISENGAGEMENT FORCE: 1.5 LBS MIN
- 2.3 DURABILITY: 500 CYCLES MIN
- 3. ENVIRONMENTAL:
- 3.1 OPERATING TEMPERATURE: -65 °C TO 165 °C
- 3.2 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT 165°C HIGH TEMP
- 3.3 MECHANICAL SHOCK: MIL-STD-202, METHOD 213, CONDITION I
- 3.4 CORROSION: MIL-STD-202, METHOD 101, CONDITION B
- 3.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
 3.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106, EXCEPT STEP 7B OMITTED

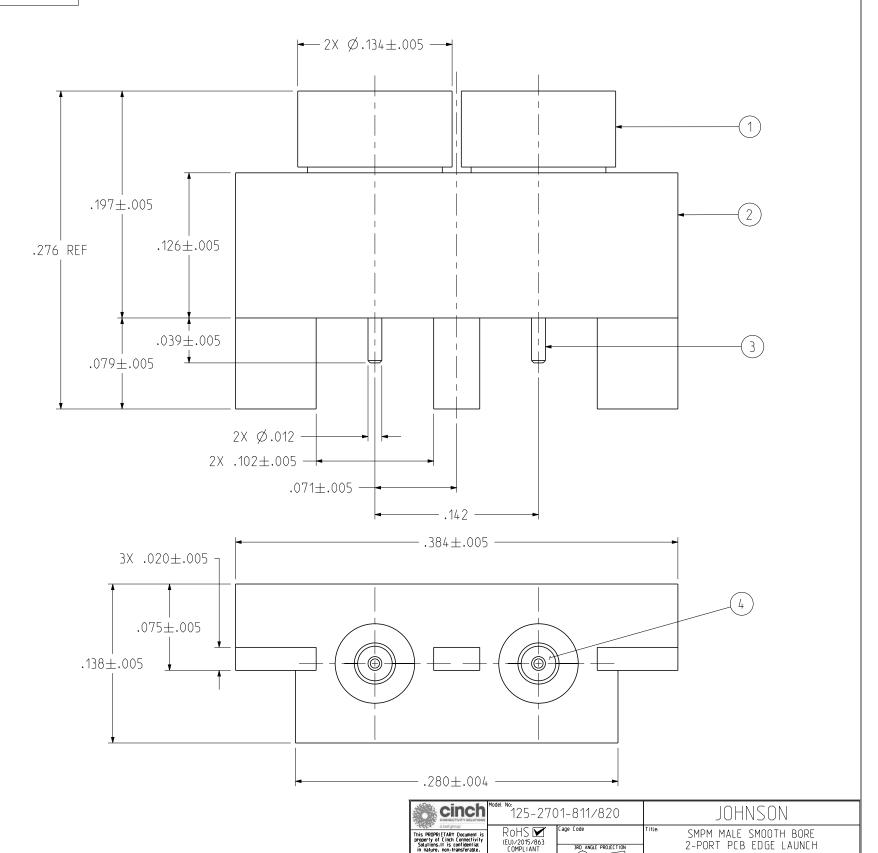

(EU)/2015/863 COMPLIANT

S OTHERWISE SPECIAL UNITS: INCH

.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°

3RD ANGLE PROJECTION Θ

TOMMY REN

10/13/2020

125-2701-811/820

B DO NOT SCALE Workmanship Std: Sheet NONE 1 OF 1