

D

C

B



A

5 4 3 2 1



SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	1000pf $\pm$ 20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1G $\Omega$

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

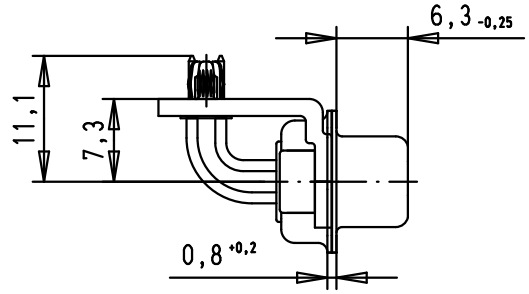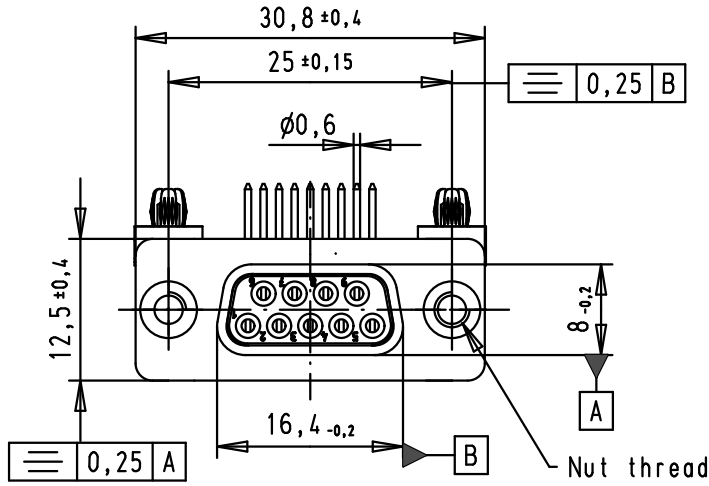


PCB Layout, Component side, thickness 1.6 mm

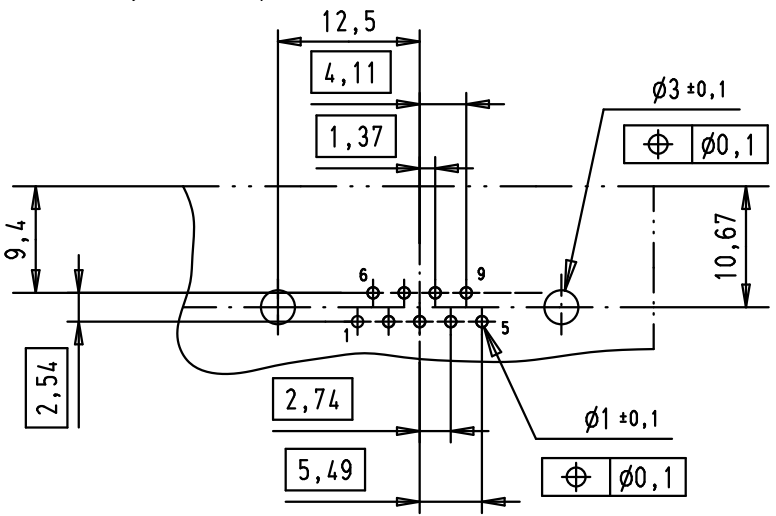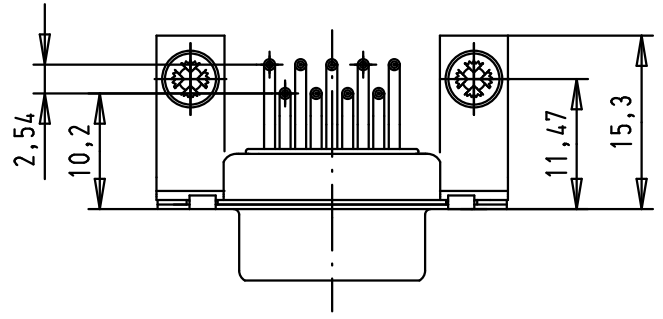

09641147233	M3
09641147232	UNC 4-40
Part number	Nut thread

Mod.	Dat.	Name	Detail.	Dat.	Name
				8-JUL-02	CV
36283	12/01/12	SD	Insp.	12/01/12	JB
33231	07/10/05	JMDR	Stand.		
32134	16/08/04	TR			
31058	8-JUL-02	CV			
			HARTING EURL F-95972 Paris		



All Dim. in mm  
Orig. Size DIN A 4

D-Sub, female, angled,  
9 Poles, solder pins,  
board-locks and clinch nuts

Ma?Mstab/  
Scale  
1.5:1



TB 0964114723x

Sub.

Blatt/ Page  
1 / 4