


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01	RELEASED	9/20/96	<i>RJC</i>

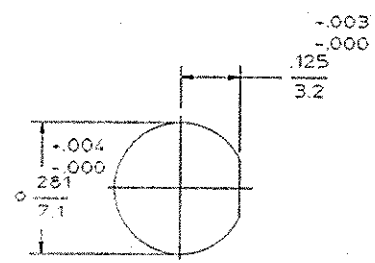

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310-2	Temperature Rating -25 TO 125°C
Frequency Range (GHz) DC to 18	Recommended Mating Torque 7-10 IN-LBS	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 500	Mating Characteristics	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.05 + 0.0F(1GHz)	Insertion (MAX Lbs) 2	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) .02 (1GHz)	Withdrawal (MIN Oz) 1	Except High Temp 115°C
RF Leakage (dB MIN) -90	Force to Engage and Disengage (IN-Lbs MAX) 2	Moisture Resistance MIL-STD-202, Method 106
Corona, 20,000 Ft (VRMS MIN) 375	Center Contact Captivation	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN @ Sea Level) 1,500	Axial (Lbs) 6	
Contact Resistance (Milliohms MAX)	Radiat (in-Oz) N/A	
Center Contact 3.0	Cable Retention	
Outer Contact 2.0	Axial Force (Lbs) 60	
Cable to Housing .05	Torque (in-Oz) 55	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1,000	Weight (Grams) TBD	
IR (Megohms MIN) 5,000		

.XXX = In  
 XXXX = mm (REF)

COMPONENT	MATERIAL	FINISH
HOUSING MOUNTING NUT LOCKWASHER CLAMP NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER 00-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
SLEEVE	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
O-RING	SILICONE RUBBER PER ZZ-R-765	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

FRAC	DEC	ANGLES
1/64	.005	1°

DRAWN BY K. L. E. DATE 8-22-96  
 CHECKED BY  
 APP'D BY *RJC* 9/20/96

USE ASSY PROCEDURE  
 NO. AP. 20-560

**MACOM**  
 An AMP company

M/A-COM, Inc.  
 Waltham, MA 02254

TITLE "OSM" BULKHEAD FEEDTHRU CABLE JACK-SOLDER CLAMP ATTACHMENT

SIZE B	CODE IDENT NO. 26805	2004-8008-92	REV 01
--------	----------------------	--------------	--------

SCALE 4:1 SHEET 1 OF 1

Tyco Customer P/N 1051029  
 Sheet 1 of 1  
 Rev 0