


NOTES:
 1. MATERIAL: PBT WITH 30% G.F. UL94
 V-0. COLOR: BLACK
 2. BURRS MAX 0.10mm. ALL PIN HOLES
 NO BURRS.
 3. EJECTION MARK MAX 0.05. MUST BE BELOW
 PRODUCT SURFACE.

Position	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
9	18.66	15.66	11.83	16.26	12.26
15	26.42	23.28	19.50	23.88	19.88
25	40.20	37.18	32.22	37.70	33.70
37	57.00	53.72	47.55	54.32	50.32

Strain relief fit to :

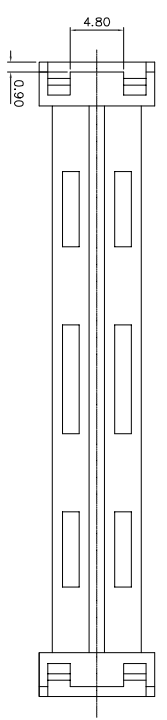

RoHS compliant
 Unit: mm

Scale	Free	Id.	Date	Name
TOLERANCE			18.05.2016	Winnie
X.X	±0.38			
X.XX	±0.25			
X.XXX	±x.13			
DIM	TOL			
Angle	±3°			

1	2	3	4	5	6	7
1	2	3	4	5	6	7

ASSMANN
 wsw components

Customer-No. ASSMANN WSW-No.
 A-SUB-SR-xx0B
 Drawing-No. ASS 7243 CO
 rev00
 Replace Sheet