


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		ECR-14-011637	14AUG2014	HZ	RZ

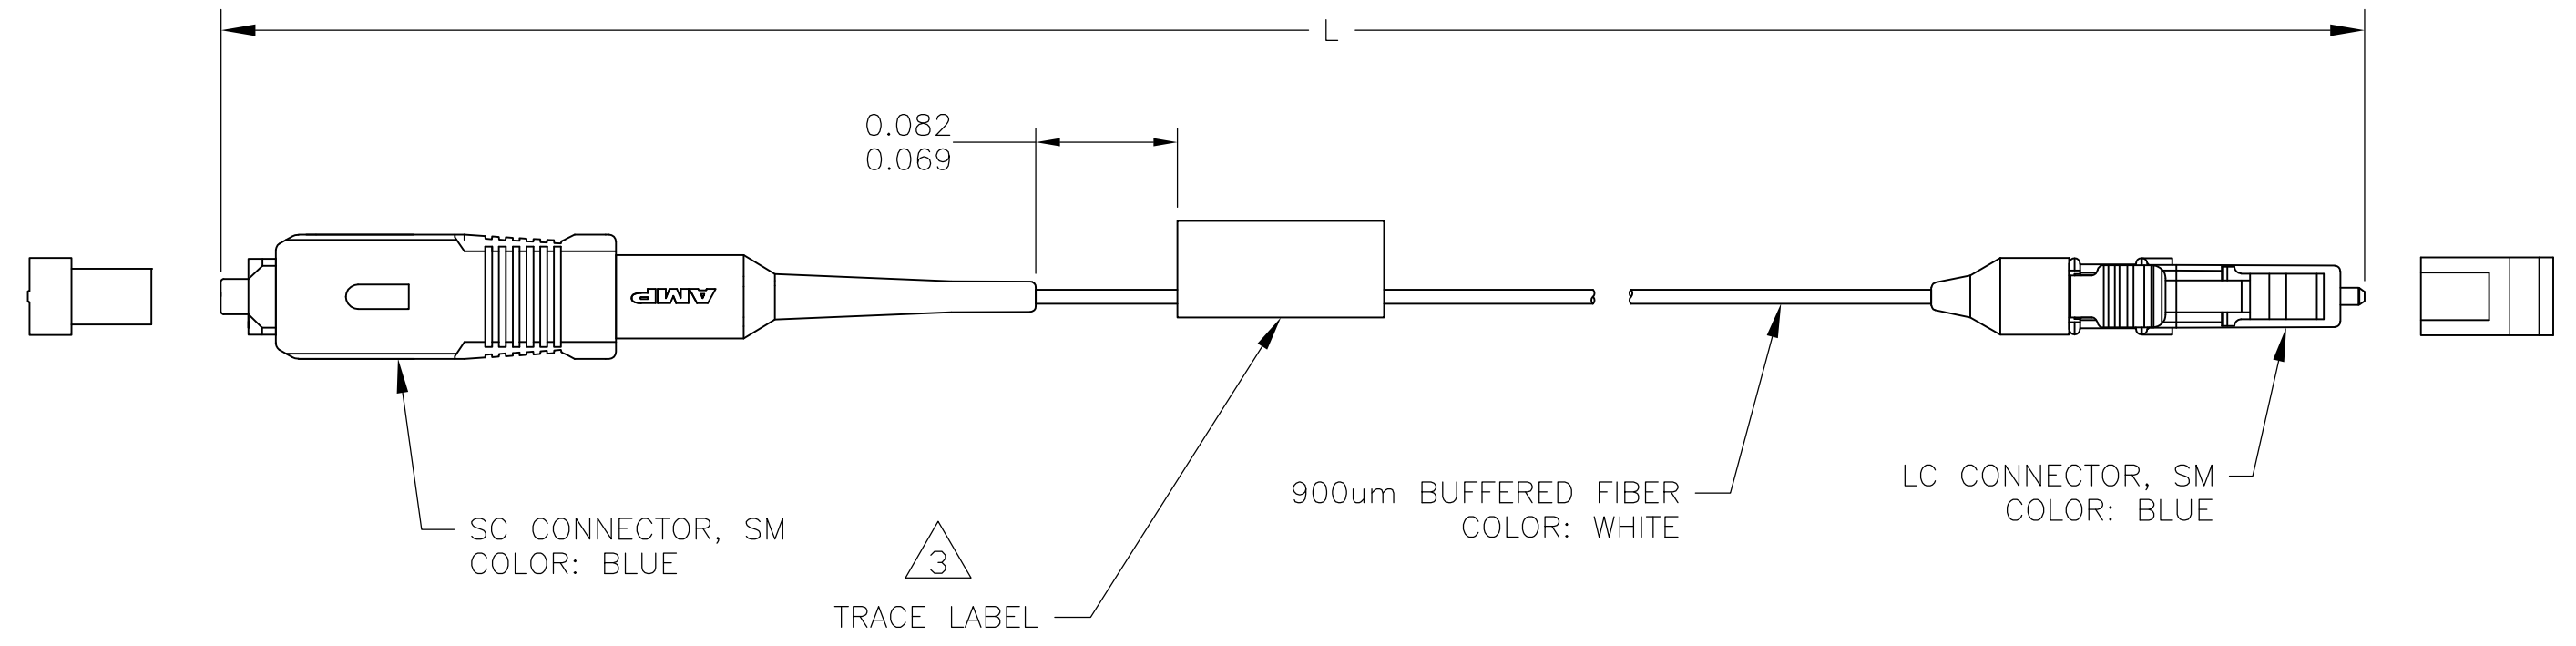

- 1. MAXIMUM INSERTION LOSS AT 1310nm:
0.5 dB SC
0.2 dB LC
- 2 MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.
- 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702

2	0.50	0.20	5.00±0.08 [196.8±3.0]	2064845-5
2	0.50	0.20	4.00±0.05 [157.5±3.0]	2064845-4
2	0.50	0.20	3.00±0.05 [118.1±2.0]	2064845-3
2	0.50	0.20	2.00±0.05 [78.7±2.0]	2064845-2
2	0.50	0.20	1.00±0.05 [39.4±2.0]	2064845-1
	MAX IL (dB) SC	MAX IL (dB) LC	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.BRIGGS 07MAY2010	STE TE Connectivity	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 07MAY2010		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 07MAY2010	NAME CABLE ASSY, FIBER OPTIC, 900um, SM. SC TO LC	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	APPLICATION SPEC -	
MATERIAL -		FINISH -	WEIGHT -	RESTRICTED TO -
CUSTOMER DRAWING			SIZE A3	CAGE CODE 00779
SCALE NTS			DRAWING NO C-2064845	REV B
SHEET 1 OF 1				