
	THIRD ANGLE PROJ. 🕀 🚭	
NOTES:	REV	D
1. MATERIALS AND FINISHES:	A	REL
REVERSE POLARITY SMA BULKHEAD CRIMP JACK IP 67 - P/N: 132422RP-10	В	ADD 400MM L
MICRO COAX RIGHT ANGLE PLUG TERMINATED USING 1.13 MM CABLE - P/N: A-1PA-113-XXXB2	C	A D D
	D	ADD
2. ELECTRICAL:		

A. IMPEDANCE: 50 OHM, NOMINAL

3. PACKAGING:

A. QUANTITY: SINGLE PACK B. BAG TO BE MARKED: AMPHENOL RF, 336320-12-XXXX, AND DATE CODE

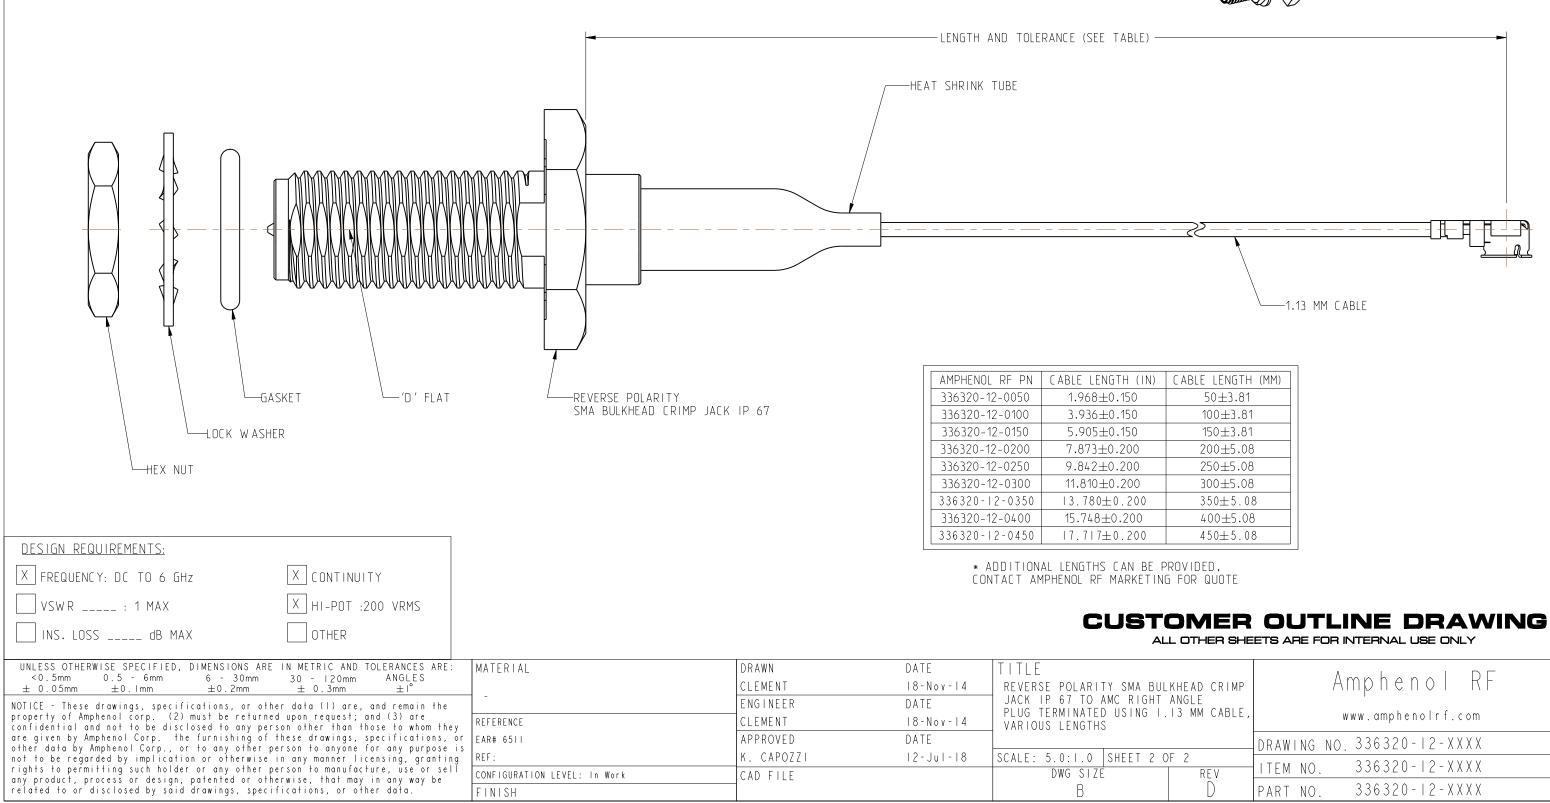

DESCRIPTION DATE ECN XELEASE TO MFG. 17-Dec-14 2838 0 A LENGTH, UPDATE LAYOUT 19-Mor-18 07361 DD 350MM LENGTH 23-May-18 8161 DD 450MM LENGTH 12-Jul-18 8583 Image: Comparison of the state	
I LENGTH, UPDATE LAYOUT 19-Mar-18 07361 DD 350MM LENGTH 23-May-18 8161 DD 450MM LENGTH 12-Jul-18 8583 Image: Second s	APPR
DD 350MM LENGTH DD 450MM LENGTH 12-Jul-18 8583	CL/BC(
DD 450MM LENGTH 12-Jul-18 8583 Image: state	KCE
CABLE LENGTH (MM) 50±3.81 100±3.81 100±3.81 100±3.81 100±3.81 200±5.08 250±5.08 300±5.08 300±5.08 300±5.08	NB
CABLE LENGTH (MM) 50±3.81 100±3.81 150±3.81 200±5.08 250±5.08 300±5.08 350±5.08 400±5.08	NΒ
CABLE LENGTH (MM) 50±3.81 100±3.81 150±3.81 200±5.08 250±5.08 300±5.08 350±5.08	
CABLE LENGTH (MM) 50±3.81 100±3.81 150±3.81 200±5.08 250±5.08 300±5.08 350±5.08 400±5.08	
$ \begin{array}{r} 50\pm 3.81 \\ 100\pm 3.81 \\ 150\pm 3.81 \\ 200\pm 5.08 \\ 250\pm 5.08 \\ 300\pm 5.08 \\ 350\pm 5.08 \\ 400\pm 5.08 \\ \end{array} $	
$ \begin{array}{r} 100\pm 3.81 \\ 150\pm 3.81 \\ 200\pm 5.08 \\ 250\pm 5.08 \\ 300\pm 5.08 \\ 350\pm 5.08 \\ 400\pm 5.08 \\ \end{array} $	
$ \begin{array}{r} 150 \pm 3.81 \\ 200 \pm 5.08 \\ 250 \pm 5.08 \\ 300 \pm 5.08 \\ 350 \pm 5.08 \\ 400 \pm 5.08 \\ \end{array} $	
200±5.08 250±5.08 300±5.08 350±5.08 400±5.08	
250±5.08 300±5.08 350±5.08 400±5.08	
300±5.08 350±5.08 400±5.08	
350±5.08 400±5.08	
400±5.08	
<u></u>	
ROVIDED. FOR QUOTE	

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY Amphenol RF www.amphenolrf.com DRAWING NO. 336320-12-XXXX 336320-12-XXXX ITEM NO REV 336320 - I 2 - X X X X PART NO.