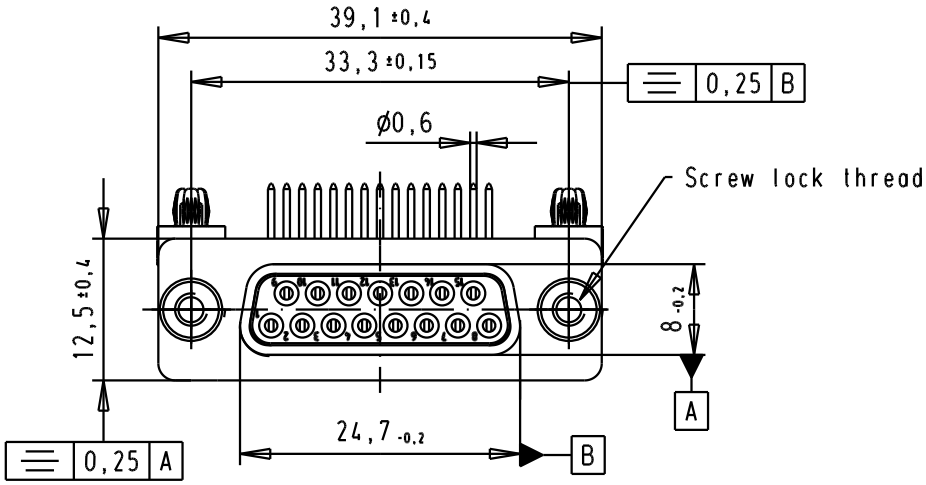

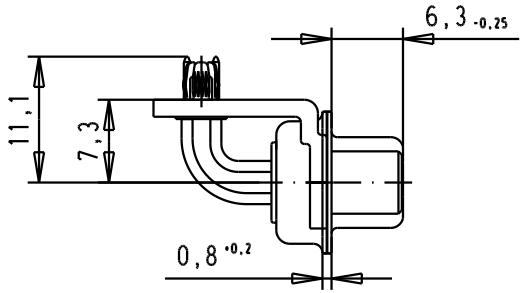

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf ±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

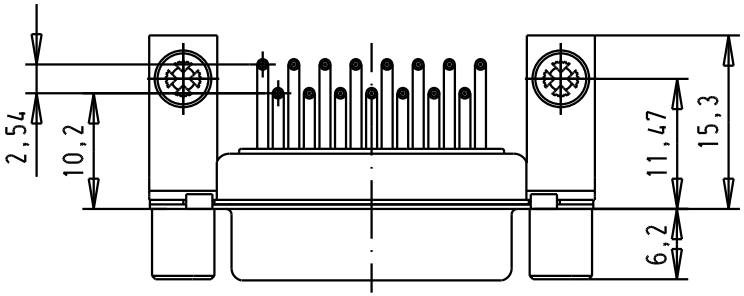

PCB Layout, Component side, thickness 1.6 mm

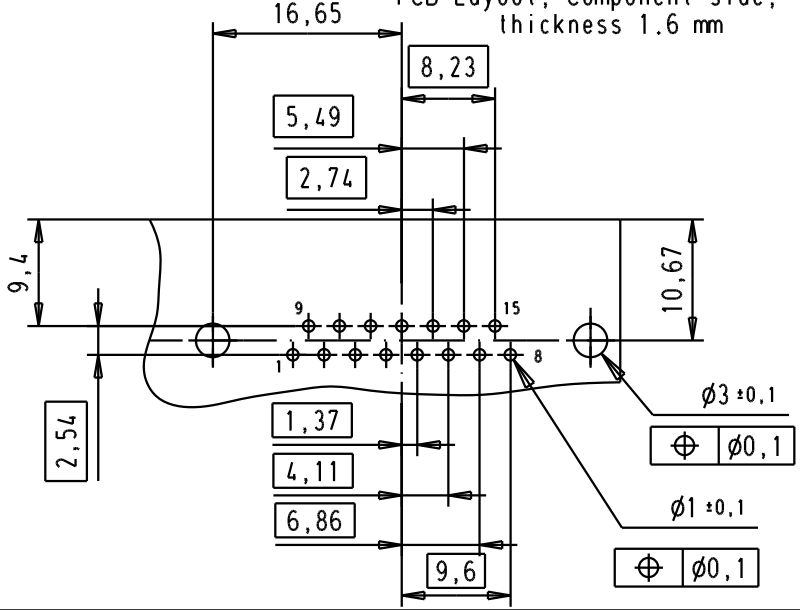

				Dat.	Name
			Detail.	8-JUL-02	CV
			Insp.		
33262	15/11/05	JMDR	Stand.		
32248	28/10/04	TR			
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

D-Sub, female, angled, 15 Poles, turned solder pins, tin plated shell with brackets, board-locks and screw-locks

Ma?Mstab/ Scale 1.5:1

HARTING EURL
F-95972 Paris

TB 0964214723x

Sub.

Blatt/ Page 2/4

09642147235	M3
09642147234	UNC 4-40
Part number	Screw lock thread