
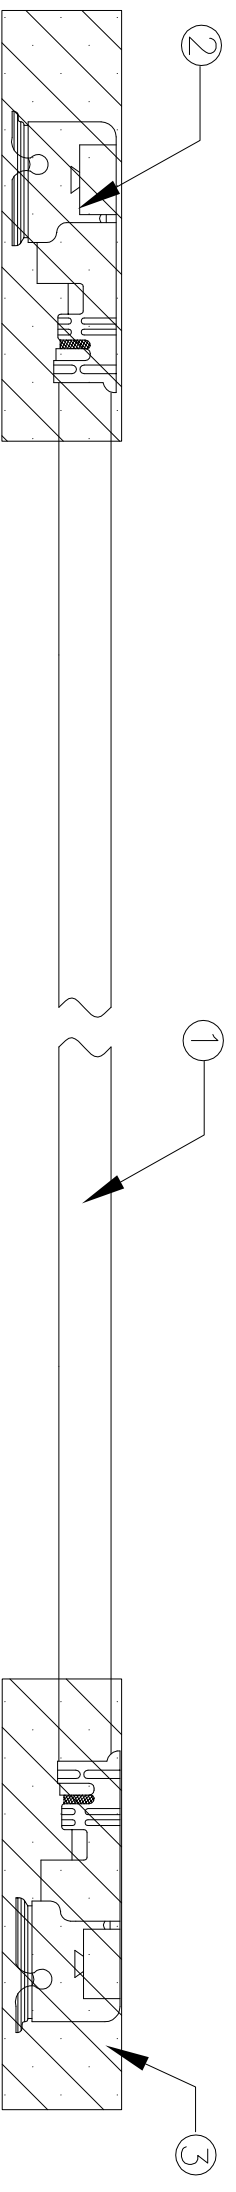


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

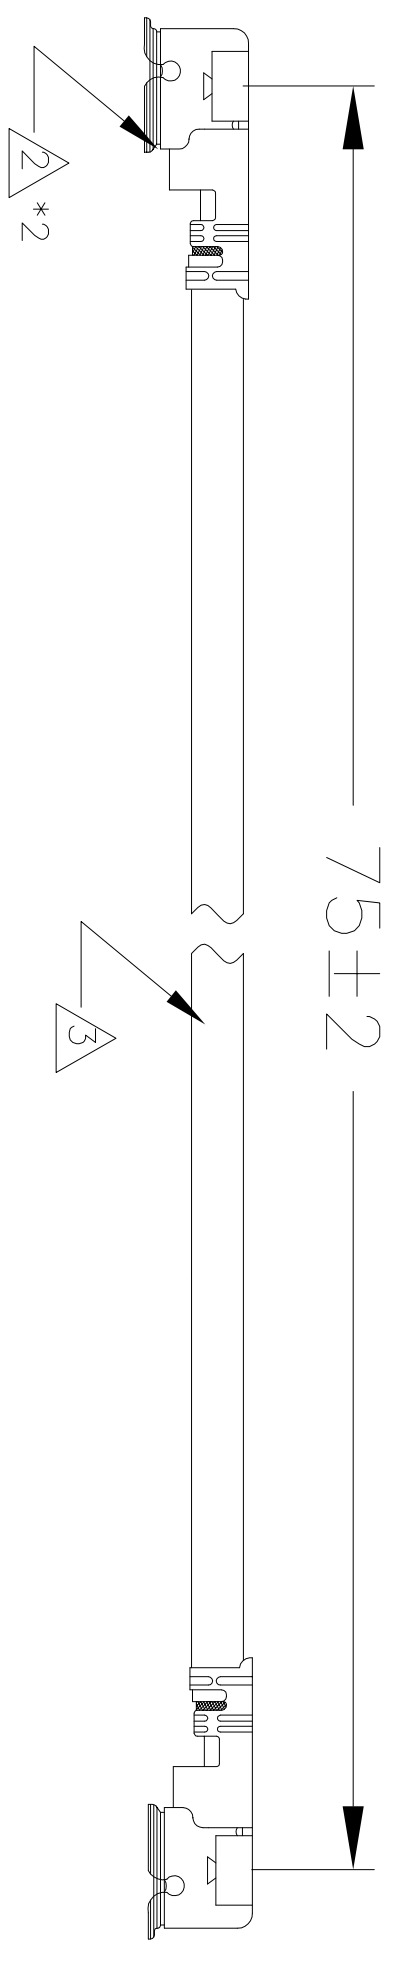

- NOTES:
1. CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY  
 HI-POT: 200 VDC FOR 100MS  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHZ  
 VSWR: 1.5:1 MAX
  2. CONNECTOR: TYPE III U.FL
  3. SUPPLIER: I-PEX 20278-112R-13  
 CABLE: 1.13MM OD, JACKET RED, 50 OHMS FEP INSULATED  
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
  4. TWO END U.FL CONNECTORS IN THE SAME POSITION
  5. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0	PLC	±	-
1	PLC	±	-
2	PLC	±	-
3	PLC	±	-
4	PLC	±	-
	ANGLES	±	-
	FINISH	±	-

DWN	12FEB09	Chen Ping
CHK	12FEB09	Andrew Dong
APVD	12FEB09	Lucky Zhang
		Product spec
		APPLICATION SPEC
		WEIGHT

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, RED COLOR, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

NAME	TYCO ELECTRONICS
NAME	FWT3 Ericsson UMTS/Aux cable assembly
DESCRIPTION	red, 75mm, 0degree

SIZE	A3
CAGE CODE	00779
DRAWING NO	1513279
SCALE	N.T.S.
SHEET	1 OF 1
REV	A