


1.5/2.8 Connector System TE Internal #: 2098627-2 Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 22 Position, 1.5/2.8 Connector System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings

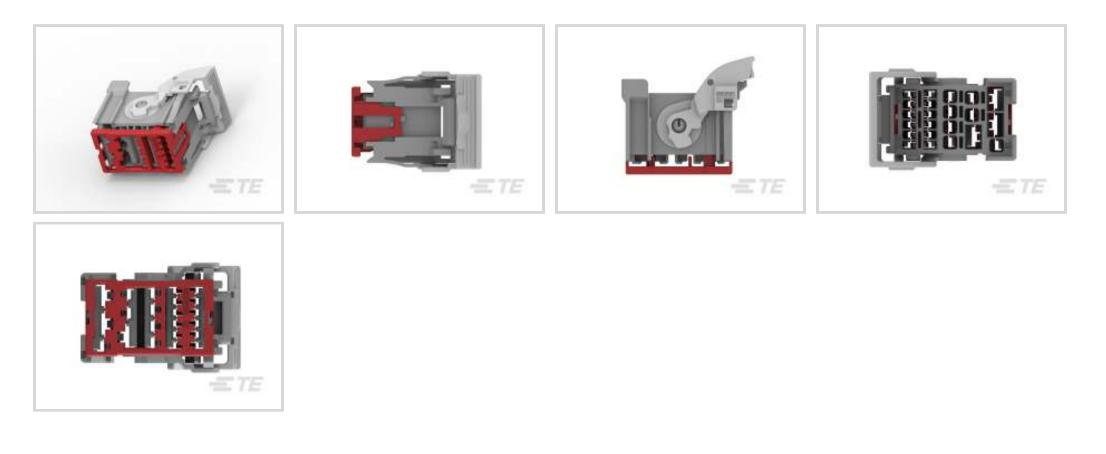

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.5 mm, 2.8 mm, 6.3 mm [.059 in, .11 in, .248 in]

Connector System: Wire-to-Board, Wire-to-Device

Number of Positions: 22

Centerline (Pitch): 3.5 mm, 5.3 mm, 9 mm [.138 in, .208 in, .354 in]

Features

Product Type Features

Connector Shape	Rectangular	
Connector & Housing Type	Housing for Female Terminals	
Connector System	Wire-to-Board, Wire-to-Device	
Sealable	No	
Hybrid Connector	Yes	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Number of Positions	22	
Number of Rows	2, 3	
Body Features		
Cable Exit Angle	90°	
Primary Product Color	Gray	
Contact Features		
Contact Size	1.5mm, 2.8mm, 6.3mm	

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 22 Position, 1.5/2.8 Connector System



Contact Type	Receptacle			
Mating Tab Width	1.5 mm, 2.8 mm, 6.3 mm[.059 in][.11 in][.248 in]			
Mechanical Attachment				
Terminal Position Assurance	Yes			
Strain Relief	Add By Accessory			
Mating Alignment Type	Polarized			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Housing Material	PAGF			
	PA GF 3.5 mm, 5.3 mm, 9 mm[.138 in][.208 in][.354 in]			
Housing Material	3.5 mm, 5.3 mm, 9 mm[.138 in][.208 in][.354			
Housing Material Centerline (Pitch)	3.5 mm, 5.3 mm, 9 mm[.138 in][.208 in][.354			
Housing Material Centerline (Pitch) Dimensions	3.5 mm, 5.3 mm, 9 mm[.138 in][.208 in][.354 in]			
Housing Material Centerline (Pitch) Dimensions Connector Height	3.5 mm, 5.3 mm, 9 mm[.138 in][.208 in][.354 in] 34.8 mm[1.37 in]			

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]			
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Other				
Serviceable	Yes			
Connector Position Assurance Capable	No			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 22 Position, 1.5/2.8 Connector System



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




22P UNSEALED HYBRID WIRE DRESS

Also in the Series | 1.5/2.8 Connector System

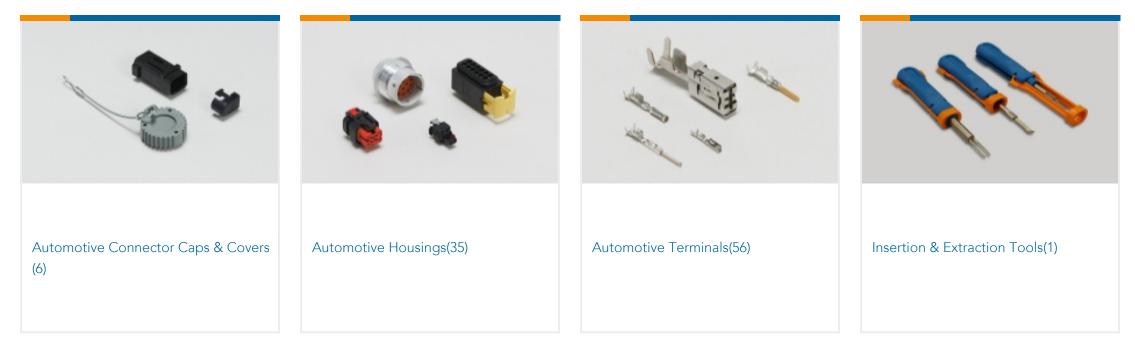

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 22 Position, 1.5/2.8 Connector System



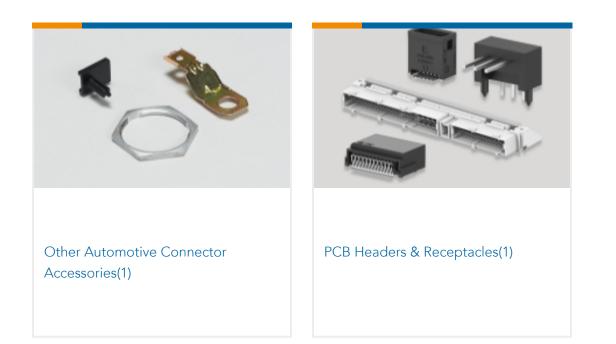

Customers Also Bought



Carrier, 20P, GY LAC, Black	36P UNSEALED HYBRID WIRE DRESS	40P Shield Assy, GY LAC	1X6 GET UNSLD SIDE LATCH PLUG, KEY C
	Name Inconstructure		
TE			
TE Part #2035360-1 1X4 GENERATION Y ASSY KEY A	TE Part #2098634-2 Carrier, 20P, GY LAC, Black		

Documents

Product Drawings 22P UNSEALED HYBRID PLUG ASSEM

English

CAD Files

Customer View Model

ENG_CVM_CVM_2098627-2_A.2d_dxf.zip

English

3D PDF

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 22 Position, 1.5/2.8 Connector System



3D

Customer View Model ENG_CVM_CVM_2098627-2_A.3d_igs.zip English Customer View Model ENG_CVM_CVM_2098627-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English