
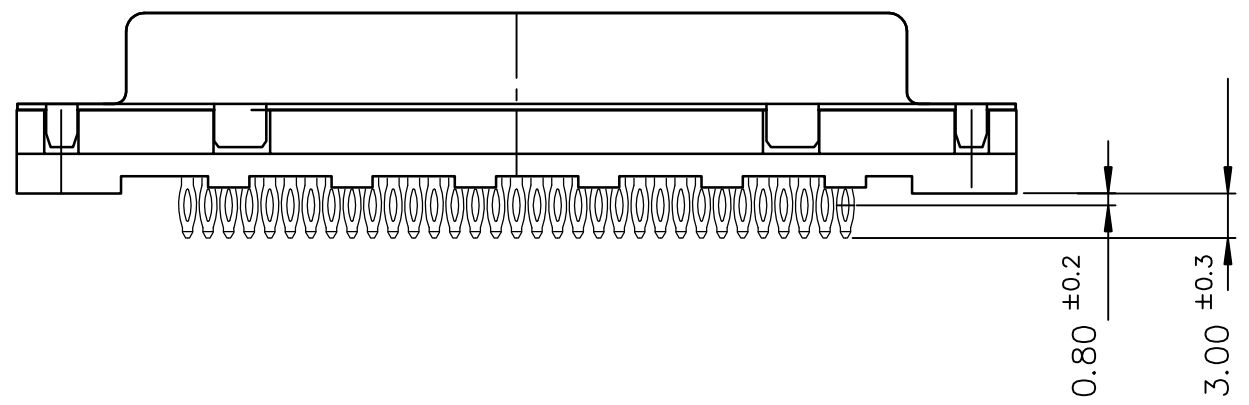


PC board drilling dimensions
(after plating – thickness: 1.60 to 3.20 mm)

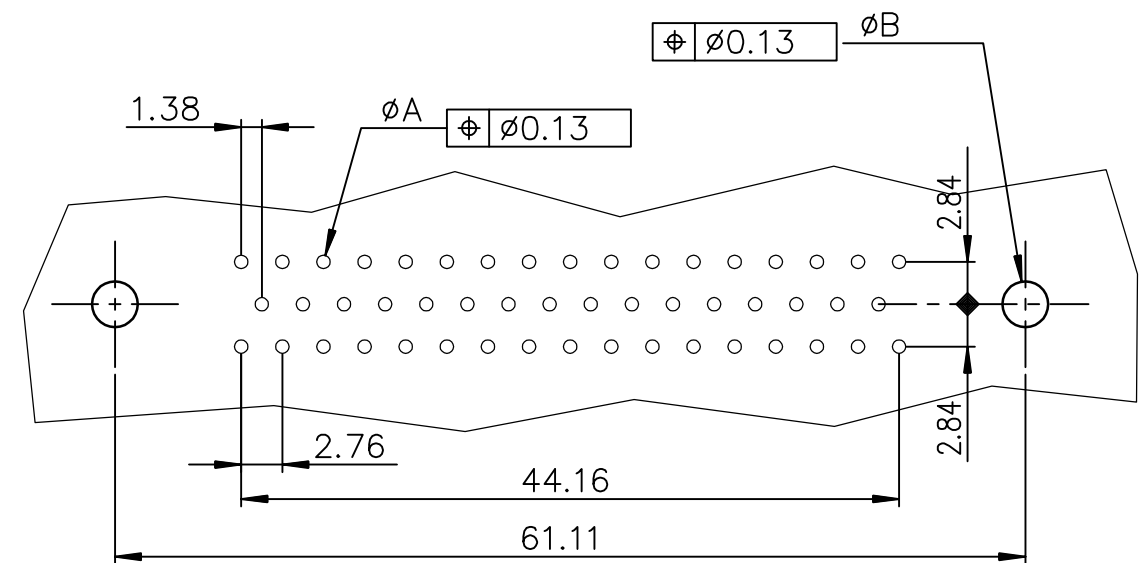

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4P*00LF
0.76μ gold	D50S91C6P*00LF

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB	
ltr		ecn no		dr		date		title	
F		ELX-I-22878		AB		2015/01/06		FEMALE CONNECTOR DELTA-D STRAIGHT – PRESS FIT	
								MM	
								scale 2:1	
				dr		1996/08/12		dwg no	
				enr		2015/01/06		sheet 1 of 1	
				chr		2015/01/06		size	
				app		2015/01/06		A3	
								type	
								Product Customer Drawing	
sheet index		revision		F					
1		sheet		1					