

New Type

MATERIAL

Insulator : PBT+30% Glass fiber UL94-V0

Contact Pin : Brass

Plating : Gold Flash

SPECIFICATION




Current Rate : 3 AMP Δ

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -55°C to +105°C

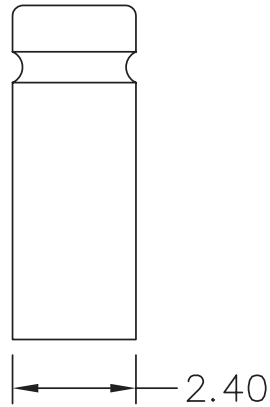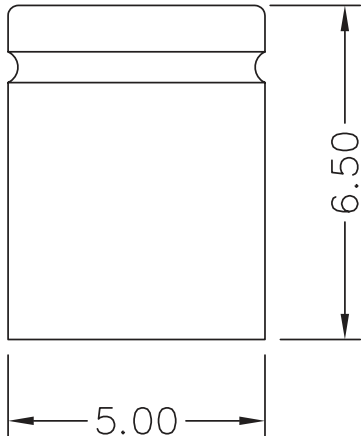

Old Type

<p>Tolerance unless otherwise specified</p> <p>mm</p> <p>.0 ± .30</p> <p>.00 ± .20</p> <p>.000 ± .XXX</p> <p>angles ± 3°</p>
--

	<p>P/N: 09200-71-BAGB00</p>
	<p>Desc.: Mini Jumper, 2.54mm, closed, 6.50mm height, black</p>
<p>Date: 2-10-20</p>	
<p>Dimensions in mm</p>	