


CUSTOMER DRAWING

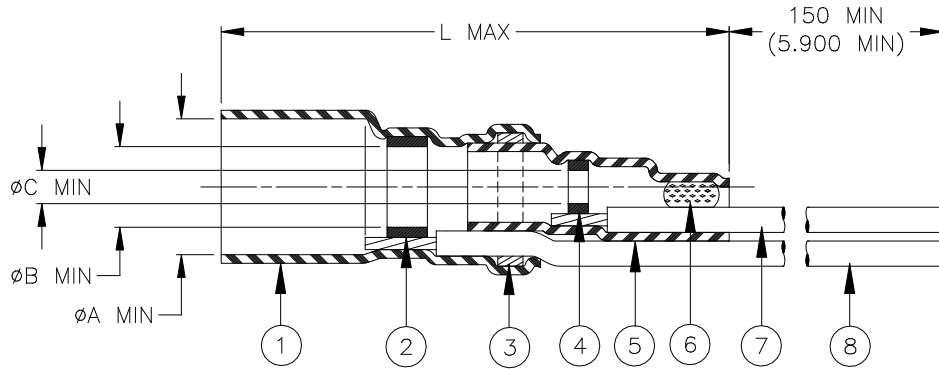

Product Name	Component Dimensions				"GA" Wire Gauge (AWG)	Cable Dimensions				
	L max	ϕA min	ϕB min	ϕC min		ϕD	ϕE	ϕF min	G±0.5 (G±0.02)	M±0.5 (M±0.02)
B-044-20-N	28.0 (1.100)	3.40 (0.135)	2.30 (0.090)	0.8 (0.030)	20	1.70 (0.065) to 3.40 (0.135)	1.30 (0.050) To 2.30 (0.090)	0.30 (0.012)	16.0 (0.630)	6.0 (0.235)
B-044-22-N					22					
B-044-24-N	24									
B-044-26-N	26									

NOTE: MATERIAL 6 DOES NOT APPLY ON B-044-20/22-N


MATERIALS

- & 5. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- & 4. SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI J-STD-006.
FLUX: TYPE ROL0 per ANSI J-STD-004.
- & 6. MELTABLE RINGS: Thermally stabilized thermoplastic.
- CONDUCTOR LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32, See Table for AWG. ETFE insulated, stranded tin plated copper.
Color: white.
- GROUND LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32. See Table for AWG. ETFE insulated, stranded tin plated copper.
Color: blue.

APPLICATION

- The parts covered by this SCD are for use in terminating the primary conductor and the braided shield of a coaxial cable having tin or silver plated conductor and shield, rated for at least 125° C and meeting the dimensional requirements listed.
- Parts will meet the requirements of Raychem Specification RT-1404 when installed per Raychem RPIP-500-03.
- Temperature range: -55°C to +150°C.


For best results, prepare the cable as shown:

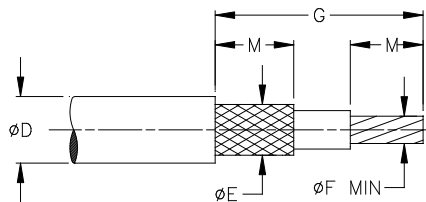

		Raychem Devices		TITLE: COAXIAL SOLDER SLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.:		
				B-044-GA-N		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision : G		Issue Date : 01-DEC-2021
ROUGHNESS IN MICRON	DATE: 19-NOV-21	CAGE CODE: 06090	ECN: ECN-21-128737	SCALE: NTS	SIZE: A	SHEET: 1 of 1
DRAWN BY: MALLIKA.D						

CUSTOMER DRAWING

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		Raychem Devices		TITLE: COAXIAL SOLDERSLLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: B-044-GA-N			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision : G	Issue Date : 01-DEC-2021	
DRAWN BY: MALLIKA.D	CAGE CODE: 06090	DATE: 19-NOV-21	ECN: ECN-21- 128737	SCALE: NTS	SIZE: A	SHEET: 2 of 1

© 2007-2016 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.