


NOTES:
 CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 360X20029X
 SELECTOR SETTINGS: 5 FOR AWG 12
 4 FOR AWG 14

STRIPPING DIMENSIONS

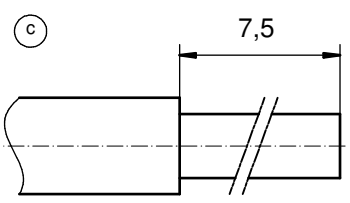

Directive 2002/95/EC RoHS compliant

3	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL					
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED					
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL					
item	quantity	part description	material	plating					
partlist									
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND			tolerance	ISO 2768-m	dim. in mm	scale:	5:1		
			date	10.06.10		name	Schmidt	material:	see partlist
			drawn	10.06.10	name	Koch	title:		
			appd.	10.06.10				HIGH POWER CONTACT MALE CRIMP VERSION 20A / AWG 12-14 PREMATING D-SUB COMBINATION	
norm				dwg no:	Inventor 10	DIN-A3			
5 x c	Ä4115	27.09.201	K.H.	d-old	sh: 1				
2 x b	Ä3728	23.08.2010	K.H.						
a	Original								
rev.	description	date	name	part no:	131C11129X				