



PACKAGE: INDIVIDUAL PE BAG.

NOTE FOR PLUG:
 MATERIAL: HOUSING-POLYCARBONATE, CLEAR.
 TERMINAL-0.36 [.014] THICK PHOSPHOR BRONZE.
 THICK GOLD IN LOCALIZED GOLD PLATE.
 AREA, GOLD FLASH OVER THE REMAINDER.
 OVER 2.54um [.000100] THICK NICKEL UNDERPLATE.


CONDUCTOR: [26AWG (0.16/7) BARE COPPER] X6C
 INSULATION: [PP6331 ID:0.95±0.03] X6C
 JACKET: PVC NOUL 65P

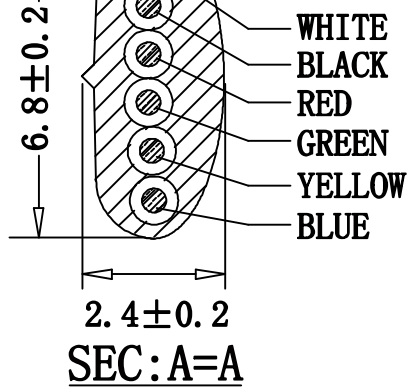

| | P1 | P2 |
|---|--------|----|
| 1 | WHITE | 6 |
| 2 | BLACK | 5 |
| 3 | RED | 4 |
| 4 | GREEN | 3 |
| 5 | YELLOW | 2 |
| 6 | BLUE | 1 |



A, B, C, D. Folding



E, F, G Folding

| NO | ITEM | DESCRIPTION | Q'TY |
|----|-----------|---------------------------------------|------|
| ① | CABLE | | 1PCS |
| ② | PLUG | 6P6C 50U" | 2PCS |
| ③ | CABLE TIE | Concrete such as material detail form | 1PCS |
| ④ | | | |

| PART NO | DRAWING NO | WIRE LENGTH "L" | BUYER COLOR | VENDOR COLOR | CUT LENGTH |
|----------------------|------------|------------------|-------------|--------------|-------------|
| 510-26-6600-BL-0005F | A | 1525±20 (5FT) | Black | BLACK LIGHT | 1525-1535MM |
| 510-26-6600-BL-0007F | B | 2135±30 (7FT) | Black | BLACK LIGHT | 2135-2145MM |
| 510-26-6600-BL-0010F | C | 3050±60 (10FT) | Black | BLACK LIGHT | 3050-3060MM |
| 510-26-6600-BL-0012F | D | 3660±60 (12FT) | Black | BLACK LIGHT | 3660-3670MM |
| 510-26-6600-BL-0014F | E | 4270±60 (14FT) | Black | BLACK LIGHT | 4270-4280MM |
| 510-26-6600-BL-0025F | F | 7625±100 (25FT) | Black | BLACK LIGHT | 7625-7635MM |
| 510-26-6600-BL-0050F | G | 15250±150 (50FT) | Black | BLACK LIGHT | 15250-15260 |

| REVISED | VERSION | BASIS | CONTENTS |
|----------|---------|--------|-------------|
| 12-02-20 | A/0 | T0210A | NEW DRAWING |
| | | | |
| | | | |

| CnC Tech, LLC Industrial Cable and Connector Technology | |
|--|-----------------|
| IDRAWING NO: 671-311 | CUSTOMER: L-671 |
| ITEM NO: 6C LINE CORD P+P PLUG | UNIT: mm |
| DATE: 2012-02-20 | ISSUE (A/0) |
| DRAWN: QE: | QA: |
| SALES DEPT: | SALES MANAGER: |