


Contact tails pretinned/
Kontaktspitzen verzinkt

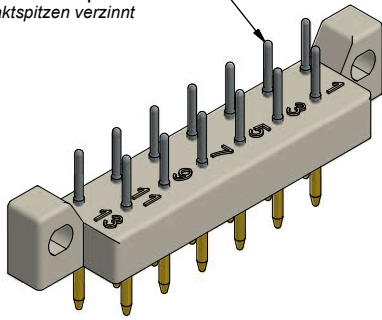

**Technical specification/
Technische Daten:**

Dielectric withstanding voltage/
Spannungsfestigkeit: 1150 V, 50 Hz 1 min.





Current rating/
Strombelastbarkeit:
Quality class 1 + 2
Gütestufe 1 + 2: 4 A max.
Quality class 3/
Gütestufe 3: 2 A max.

Temperature range/
Temperaturbereich:
Quality class 1
Gütestufe 1: -65 °C ... +125 °C
Quality class 2
Gütestufe 2: -55 °C ... +125 °C
Quality class 3
Gütestufe 3: -25 °C ... +85 °C

Mating cycles/
Steckzyklen:
Quality class 3 = 50
Gütestufe 3
Quality class 2 = 400
Gütestufe 2
Quality class 1 = 500
Gütestufe 1

**Materials/
Werkstoffe:**

Contact/
Kontakt: Cu alloy, Au over Ni
Contact tails pretinned/
Kontaktspitzen verzinkt
Insulator/
Isolierkörper: PC GF UL 94 V-1, grey/grau

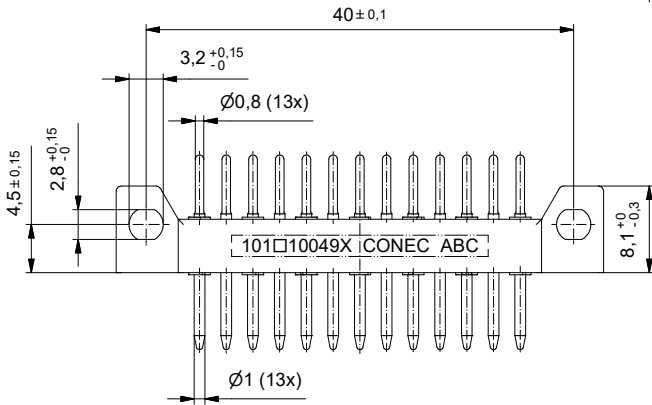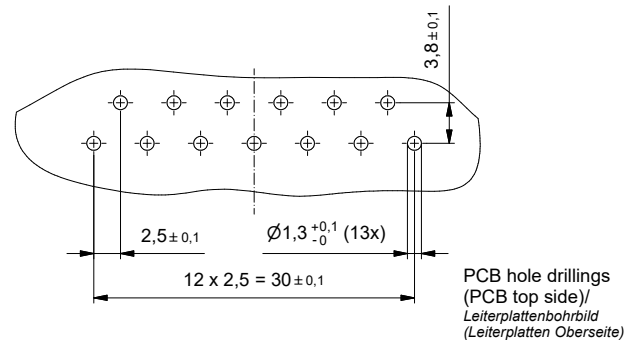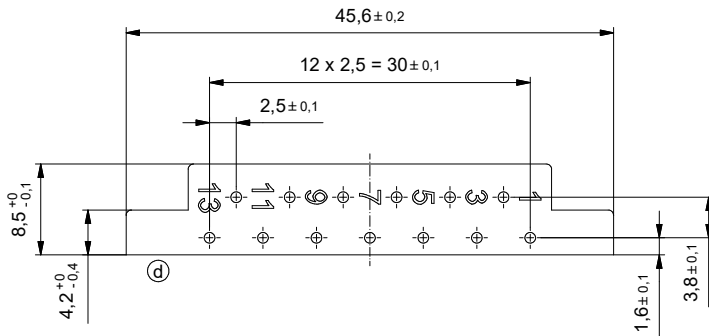

Part no. / Part marked / Art.-Nr. / Bedruckung:	Quality class / Gütestufe:	Contact plating / Kontakt Veredelung:
101A10049X	3	Gold over nickel / 50 mating cycles Gold über Nickel / 50 Steckzyklen
101B10049X	2	Gold over nickel / 400 mating cycles Gold über Nickel / 400 Steckzyklen
101C10049X	1	Gold over nickel / 500 mating cycles Gold über Nickel / 500 Steckzyklen

Index: d Ä20-0202 28.04.2020 JLE	Scale/ Maßstab: 2:1		dwg no / Z.-nr.: 10K1A017	DIN-A3
Status: Freigegeben			Male connector 13pos. 0,150 inch / with straight solder pin Messerleiste 13pol. 3,8 mm / mit geradem Lötstift	
RoHS compliant/konform				1/1

This reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. For further information on other documents, please refer to the website: www.conec.com.