
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00011	Connector, dc plug, 5.5x2.5xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32	1	
2	30-00004	Wire, 1C BC, 18 AWG, UL1185, 300V, 80C, 3.4 mm, shielded, VW-1, PVC	1	
3	24-00016	Overmold, PVC, black	1	
4	Heat Shrink	Heat shrink tube, Ø4.0, 10±2 mm, black	1	Covers end of jacket
5	Heat Shrink	Heat shrink tube, Ø2.0, 30±5 mm, black	1	Covers shield

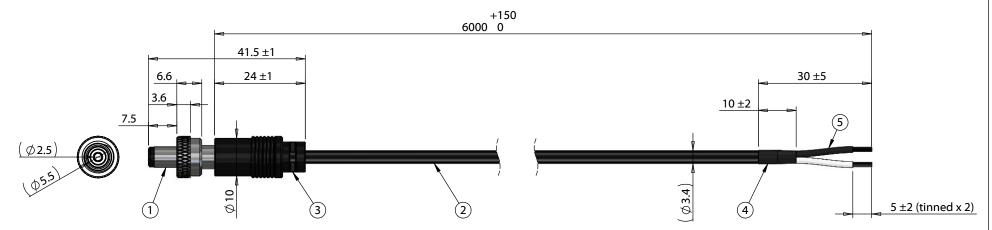

Notes:

Cable rated for 48 V, 6.5 A

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram					
50-00011	wire color				
center	white				
sleeve	shield				

Revision:	Date:	Description:	Prepared: NP Digitally signed by MP Date: 2022.11.02 11:2028 07:00	Notes:					
Α	11/2/2022	Initial release		RoHS compliant		TENSILITY  tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			.ITY
			Verified:  Digitally signed blee: 20221109 blee: 20221109 blee: 20221109 blee: 20221109 blee: 20221109	Function test: no open, no shor intermittent	t circuit, no				
			millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 6000 mm, 5.5x2.5x7.5mn	n 50-00011 locking	Size:	Part nu		
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	dc plug to 5mm tinned, 18 AWG, UL1185, 30-00004 wire		Scale:			Sheet 1 of 1
		†	Ļ		0				_

5 3 2