


Series
EPXB




ENVIRONMENTAL PIN INSERT 'A' KEYING
12 CAVITIES FOR ML or MT LuxCis OPTICAL CONTACTS

Issue:
Aug.10, 2009

Page
1/1

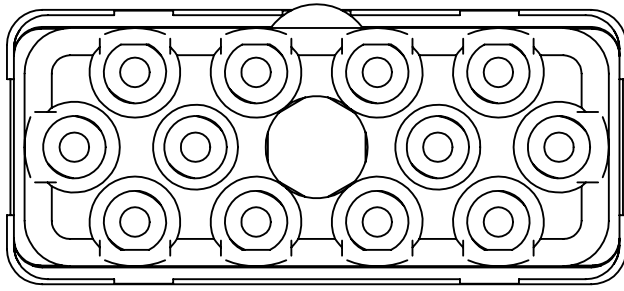

Front view
Mating face

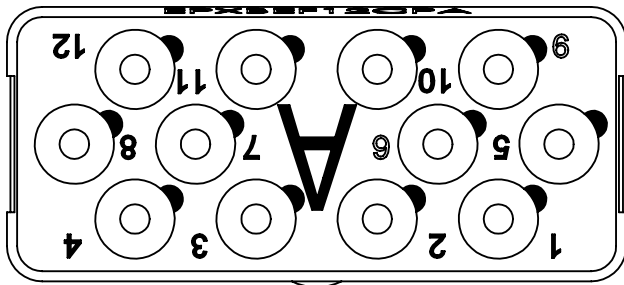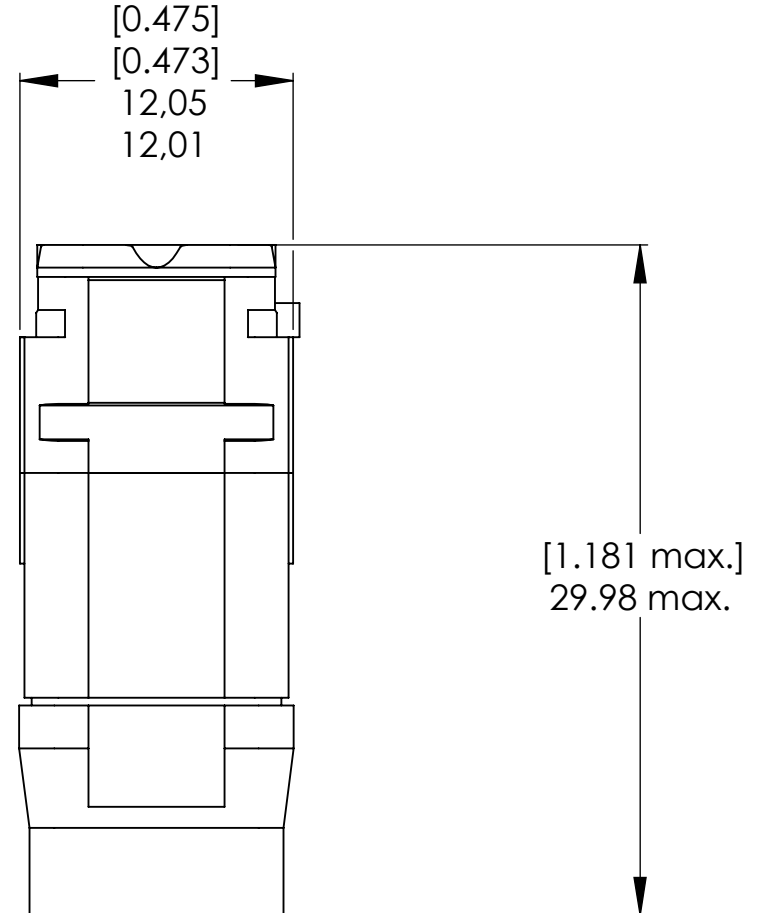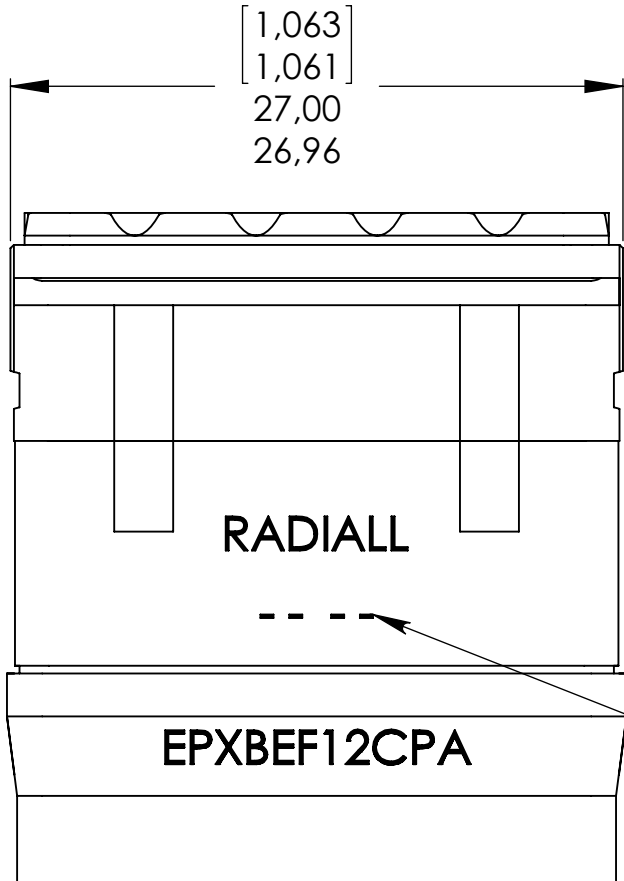

Rear view
Cavity identification

MATERIAL:


INSERT: Fiberglass filled thermosetting
RETENTION CLIP: Berillium copper
REAR GROMMET & INTERFACIAL SEAL: Fluorosilicone elastomer

NOTES:

Environmental Insert 12 cavities for:
ML/MT (mono-key) LuxCis optical contact.
Insert delivered without contact.

Refer to LuxCis maintenance document 503 08 590 section "Advices / recommendations" before starting to use this product.

DIMENSIONS : mm (inch are given for information only)



Confidential information not to be disclosed to third parties without Radiall approval. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION	Aug. 10,09	Add "Refer to LuxCis maintenance to use this product"	SURAUULT	PESSARD
	03 04 08	Front view updated	SURAUULT	PESSARD
PEN:	11 03 08	Rear marking updated	SURAUULT	PESSARD
	04 04 07	30.00,29.20 --> 28.98 max- 0.474--> 0.475 sup. cavities or environmental insert for HL/HT (hexagonal) LuxCis optical contact sup. insert material: High grade thermoplastic	SURAUULT	PESSARD
NOM: HUGER D. DATE: Apr. 28 2006 APPR.: PESSARD M.	Issue	Revisions	Name	Approved