
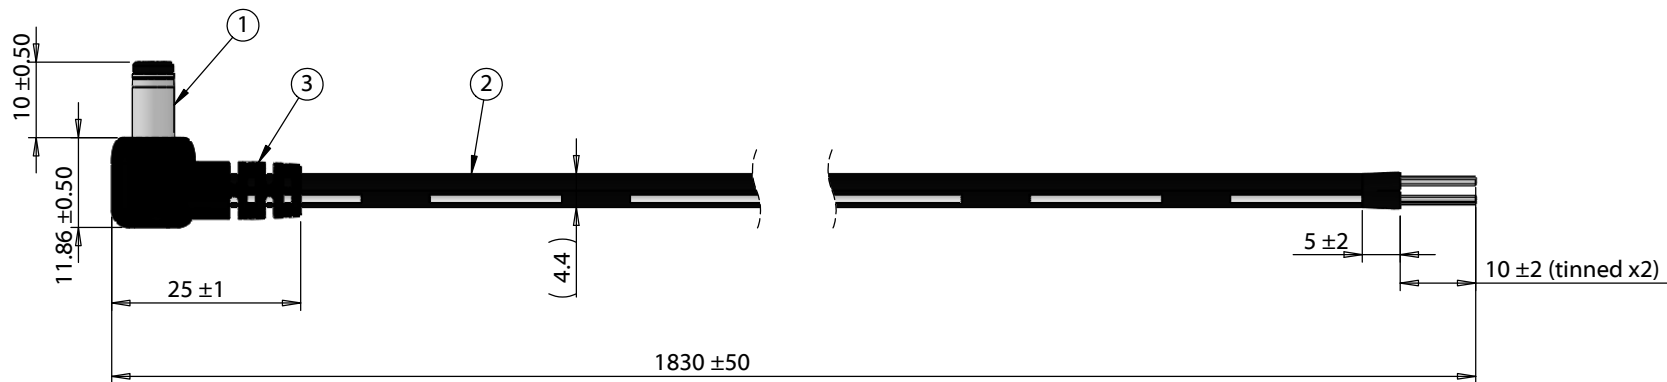


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00129	Connector, dc plug, 5.5x2.5xL18.5 mm, molding style, spring contacts	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00006	Overmold, PVC, black	1	



Notes:
Functionally equivalent components may be substituted
Cable rated for 48 V, 7 A

Wiring diagram	
50-00129	Wire Color
Center	Black with stripe
Sleeve	Black

Revision: A	Date: 6/28/2019	Description: Initial release	Prepared: JC <small>Digitally signed by JC Date: 2020.04.08 13:45:58 -07'00'</small>	Notes: RoHS compliant	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
			Verified: AW <small>Digitally signed by AW Date: 2020.04.08 14:24:10 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.5x10 mm 90° 50-00129 dc plug to stripped tinned, 18 AWG, 30-00007 wire	Size: A Part number: 10-01066
					Scale: 1:2 Sheet 1 of 1

5

4

3

2

1