


6		5		4		3		2		1	
ITEM	PART#	DESCRIPTION			QTY	UOM					
A	561349001	2.0 WTB CONN CRIMP REC AWG#22-#24 CHAIN			1	PC					

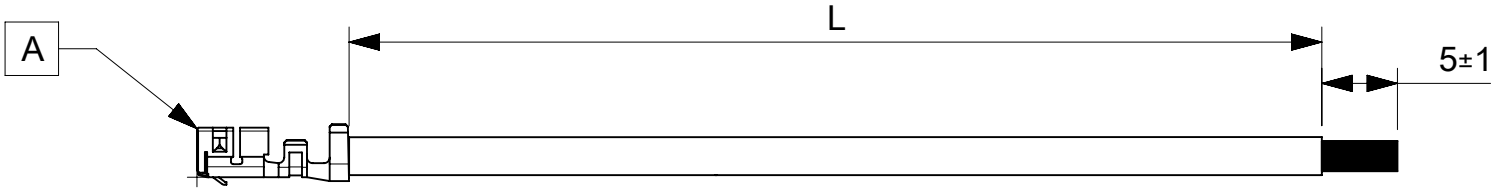

PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2196551121	Micro-One ISL F-S 75mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	75±3	BLACK
2196551122	Micro-One ISL F-S 150mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	150±4	BLACK
2196551123	Micro-One ISL F-S 225mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	225±4	BLACK
2196551124	Micro-One ISL F-S 300mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	300±4	BLACK
2196551125	Micro-One ISL F-S 450mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	450±4	BLACK
2196551111	Micro-One ISL F-S 75mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	75±3	BLACK
2196551112	Micro-One ISL F-S 150mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	150±4	BLACK
2196551113	Micro-One ISL F-S 225mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	225±4	BLACK
2196551114	Micro-One ISL F-S 300mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	300±4	BLACK
2196551115	Micro-One ISL F-S 450mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	450±4	BLACK
2196552121	Micro-One ISL F-S 75mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	75±3	RED
2196552122	Micro-One ISL F-S 150mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	150±4	RED
2196552123	Micro-One ISL F-S 225mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	225±4	RED
2196552124	Micro-One ISL F-S 300mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	300±4	RED
2196552125	Micro-One ISL F-S 450mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	450±4	RED
2196552111	Micro-One ISL F-S 75mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	75±3	RED
2196552112	Micro-One ISL F-S 150mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	150±4	RED
2196552113	Micro-One ISL F-S 225mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	225±4	RED
2196552114	Micro-One ISL F-S 300mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	300±4	RED
2196552115	Micro-One ISL F-S 450mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	450±4	RED

**NOTES:**

1. Crimping to be done as per Molex standards.
2. The product specification relies on the terminals & wire spec.
3. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.9mm Max for 22 AWG and 0.75mm Max for 24 AWG.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/12/27	A	INITIAL RELEASE	SAIKIG
DOCUMENT STATUS		P1	RELEASE DATE 2022/01/11 06:51:05

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: <b>mm</b> SCALE: <b>NTS</b>		CURRENT REV DESC:		<p>SEE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>			
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 690622 DRWN: SAIKIG    2021/12/25 CHK'D: MNARAYAN01    2022/01/11 APPR: MNARAYAN01    2022/01/11					
	ANGULAR TOL ± °		INITIAL REVISION:					
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		DRWN: SAIKIG    2021/12/25 APPR: MNARAYAN01    2022/01/11					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: <b>A4-SIZE</b>	SERIES: <b>219655</b>	DOCUMENT NUMBER: <b>2196551121</b>	DOC TYPE: <b>PSD</b>	DOC PART: <b>000</b>	REVISION: <b>A</b>
			MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET	SHEET NUMBER: 1 OF 1			