

DESIGNED & DIMENSIONED
IN MILLIMETERS [INCHES]

MCX-P-C-XX-RA-CA2


GENDER
-P: PLUG
TYPE
-C: CABLE

TERMINATION
-CA2: RG178 CABLE
ORIENTATION
-RA: RIGHT ANGLE

PLATING SPECIFICATION
-H: 30μ" GOLD CENTER CONTACT,
3μ" GOLD OUTER CONTACT
-HN: 30μ" GOLD CENTER CONTACT,
100μ" NICKEL OUTER CONTACT
(SEE TABLE 1)

DO NOT
SCALE FROM
THIS PRINT

TABLE 1			
ITEM	COMPONENT	-H	-HN
1	SUB ASSEMBLY	SUB-MCX-P-C-H-RA-CA2	SUB-MCX-P-C-HN-RA-CA2
2	FERRULE	MCX-FER-005-F	MCX-FER-005-N
3	INSULATOR	MCX-INS-001	
4	CAP	MCX-CAP-002-F	MCX-CAP-002-N

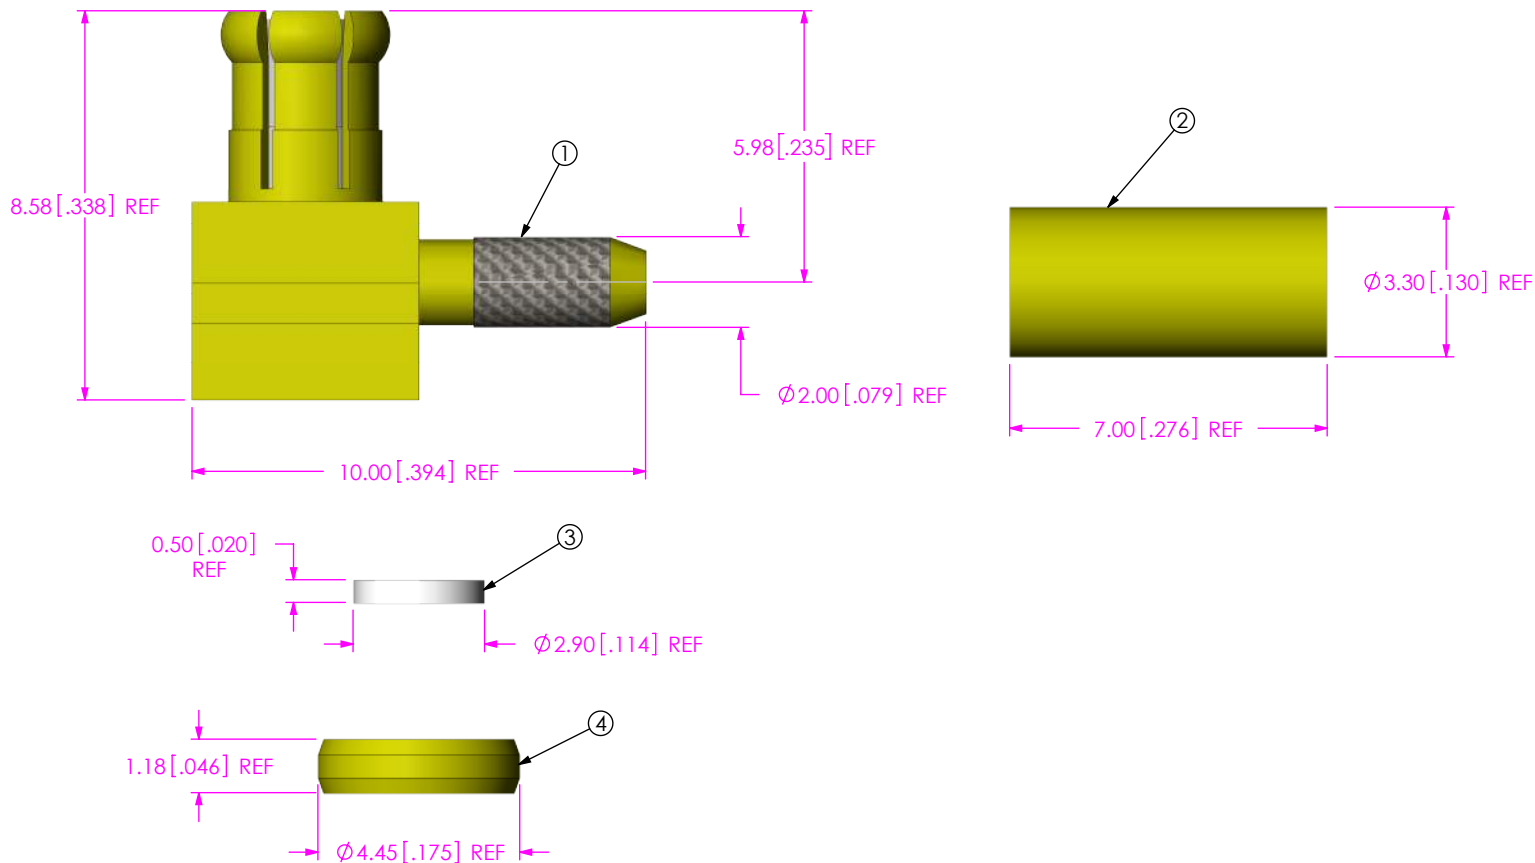


NOTES:

1. NOTE DELETED.
2. NOTE DELETED.
3. NOTE DELETED.
4. NOTE DELETED.
5. PRODUCT TO BE BULK PACKAGED PER PACKAGING STANDARD CO-RF-WI-3040-M.
6. NOTE DELETED.
7. NOTE DELETED.
8. NOTE DELETED.

F:\DWG\MISC\MKTG\MCX-P-C-XX-RA-CA2-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN
MILLIMETERS [INCHES].
TOLERANCES ARE:
DECIMALS ANGLES
.X: ±0.3 [.01] 5°
.XX: ±0.13 [.005]
.XXX: ±0.051 [.0020]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD., NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
50 OHM, MCX RIGHT ANGLE CABLE PLUG, RG178


DWG. NO.
MCX-P-C-XX-RA-CA2

BY: R MUSSER 02/06/2008 SHEET 1 OF 2


MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 6:1
SHELL, FERRULE, CAP: BRASS
CONTACT: BRASS
DIELECTRIC: PTFE



IN-PROCESS 1
STRIP CABLE AND TIN INNER CONDUCTOR

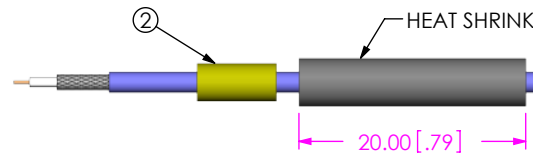


IN-PROCESS 2
ADD HEAT SHRINK TUBING AND FERRULE

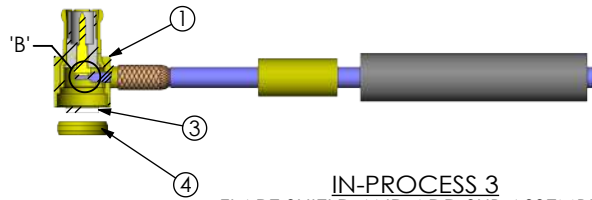


IN-PROCESS 3
FLARE SHIELD AND ADD SUB ASSEMBLY

END OF CABLE DIELECTRIC
SHOULD SEAT UP AGAINST
CONTACT CUP




DETAIL 'B'
SCALE 6 : 1

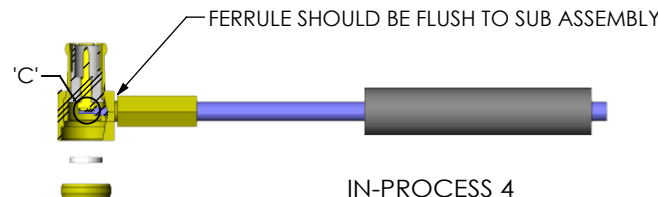

IN-PROCESS 4
CRIMP FERRULE AND SOLDER SIGNAL PIN
(USE RF CRIMP HAND TOOL # CAT-RF-FER-001 USE .105" DIE SIZE)

CABLE CENTER CONDUCTOR
SHOULD NOT PROTRUDE
OUTSIDE CONTACT CUP
AFTER FERRULE IS CRIMPED



DETAIL 'C'
SCALE 6 : 1



IN-PROCESS 5
INSERT INSULATOR AND CAP

0.00±0.10 [.000±.004]

DETAIL 'D'
SCALE 2.5 : 1



IN-PROCESS 6
ACTIVATE HEAT SHRINK

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:0.666667

samtec

520 PARK EAST BLVD., NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
50 OHM, MCX RIGHT ANGLE CABLE PLUG, RG178

DWG. NO.
MCX-P-C-XX-RA-CA2

BY: R MUSSER 02/06/2008 SHEET 2 OF 2