# 2029181-3 ~ ACTIVE

#### VAL-U-LOK

TE Internal #: 2029181-3 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 3 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0 View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

#### Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 4.2 mm [.165 in ]

#### Features

#### **Product Type Features**

Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

#### **Configuration Features**

Number of Positions	3
PCB Mount Orientation	Vertical
Number of Power Positions	3
Number of Signal Positions	0
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 VAC
Contact Features	
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	9 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 3 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0



#### **Termination Features**

Termination Post & Tail Length	3.5 mm[.138 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Mating Alignment Type	Keyed	
Mating Retention	g Retention With	
Mating Alignment	With	
PCB Mount Alignment	With	
PCB Mount Retention	With	
PCB Mount Retention Type	Boardlock	
Mating Retention Type	Latch	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	4.2 mm[.165 in]	
Housing Color	Natural	
Housing Material	Nylon 66 GF20	

#### Dimensions

Connector Height	12.8 mm[.504 in]	
PCB Thickness (Recommended)	.06 mm[1.6 in]	
Product Width	5.4 mm[.213 in]	
Product Length	13.8 mm[.543 in]	
Compatible Insulation Diameter Range	1.2 – 3.1 mm[.047 – .122 in]	
Usage Conditions		
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]	
Operation/Application		
Circuit Application	Power	
Identification Marking		
Circuit Identification Feature	With	
Industry Standards		
CSA Rating	208567	
UL Rating	Recognized	
Agency/Standard	/Standard CSA, UL	

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 3 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0



Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)
Packaging Features	
Packaging Method	Bag, Box & Tray
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

No Restricted Materials Above Threshold

Current ECHA Candidate List: JUNE 2023 (235)

Candidate List Declared Against: JUNE

2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Wave solder capable to 265°C


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


# **Compatible Parts**

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 3 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0



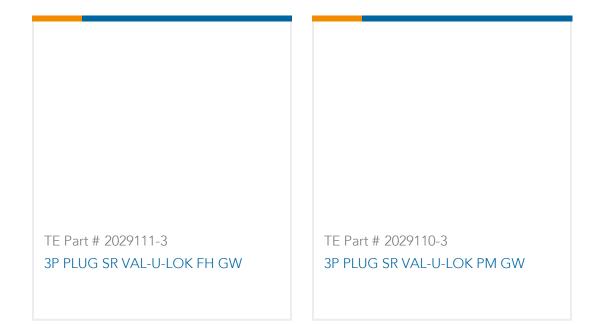

# Customers Also Bought

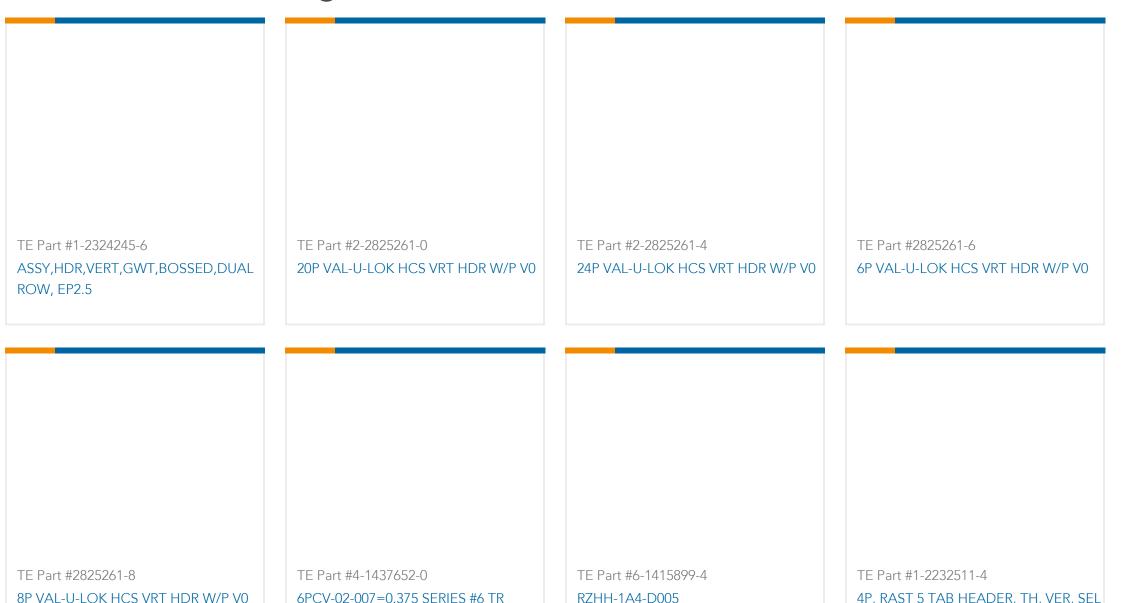

of VAL-O-LORTICS WITTIDIK WIT VO	01 CV-02-007 = 0.575 SERIES #0 TR	
TE Part #2-1971845-4 4P, RAST 5 Tab Header, THV	TE Part #2-2324245-6 ASSY,HDR,VERT,GWT,BOSSED,DUAL	
	ROW, EP2.5	

# Documents

Product Drawings 3P VAL-U-LOK VRTHDR W/PGS GW

English

## **CAD** Files

#### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2029181-3\_B.2d\_dxf.zip

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 3 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0



English

Customer View Model ENG\_CVM\_CVM\_2029181-3\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2029181-3\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages VAL-U-LOK\_GLOW\_WIRE\_CONNECTORS

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English