

Ξ	۵	н т	m	0



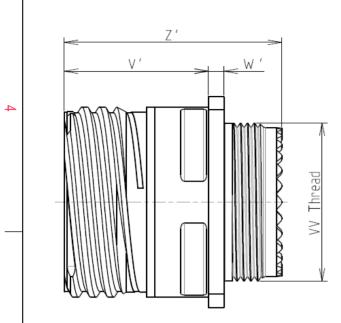



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	- 65℃ to +175℃			
-Salt Spray	: 2000 hours			

8D 0

G

13

J

03

Ρ

F

E L

Dim Nominal		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	23.01	
R2	20.62	
S	28.6±0.3	
V	19.5+1.4/-0	
W'	2.1/3.65	
Z'	32 Max	
/V THREAD	M18x1-6g	


Delivered W/O Contacts


CONTACT LAYOUT : 13-03

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : E



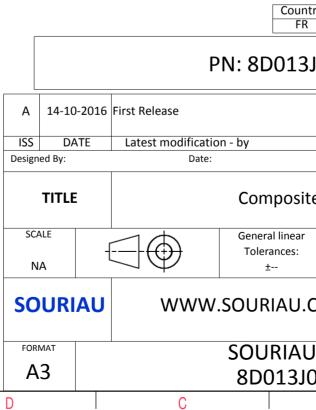

	Φ		A			
					4	
	MPLE				3	
whic er of t	non-conformit h does not co he Parties or t n, technical n	mply with by a third par				
Intry R	Jurisdiction & Control List Not Listed				2	
310	BJO3PEL					
				MOD N°		
		CUSTOME	R DRAWING		-	
	te Receptacle 8D series					
ar		NPRDS / PROJECT 859				
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
	DRG N°			SHEET		
103	BPEL-C		A	1/2	J	

		ര	н г	m	D	0	
		Contact Layout				Pa	anel Cutou
4		03 () () () () () () () () () () () () ()			Ĩ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47				Dim	<u>ðī</u>
ω						ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	oducts wh y either of
N						PN: 8[Countr FR D013J
_					A 14-10 ISS DA Designed By:	-2016 First Release TE Latest modification - by Date:	
					SCALE		nposite
-					NA SOURI		erances: ± RIAU.C
			1		FORMAT A3	8D	JRIAU 013J0
	Н	G	F	E	D	С	

