

## Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pluggable device protection, according to type 3/class III, for 1-phase power supply networks with separate N and PE (3-conductor system: L1, N, PE), with integrated surge-proof fuse and remote indication contact. Also suitable for DC applications.

The illustration shows version PLT-SEC-T3-230-FM

### Product Features

- Varistor-based device protection
- Can be used without separate backup fuse thanks to integrated overcurrent protection
- For 1-phase power supply units (AC/DC)
- Pluggable
- Optical status indicator via LED
- With floating remote indication contact
- Plugs can be checked with CHECKMASTER 2



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	90.0 g
Custom tariff number	85363030
Country of origin	Germany

### Technical data

#### Dimensions

Height	90 mm
Width	17.7 mm
Depth	74.5 mm
Horizontal pitch	1 Div.

#### Ambient conditions

# Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

## Technical data

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (half sinus / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (10 ... 150 Hz/20 cycles/axis/X, Y, Z)

### General

Standards/specifications	EN 61643-11 2012
IEC test classification	III
	T3
EN type	T3
Number of ports	One
SPD design	Combination type
Mode of protection	L-N
	L-PE
	N-PE
	(L+) - (L-)
	(L+/L-) - PE
Mounting type	DIN rail: 35 mm
Color	light grey RAL 7035
	traffic grey A RAL 7042
Housing material	PA 6.6-FR 20% GF
	PA 6.6-FR
Pollution degree	2
Flammability rating according to UL 94	V-0
Type	DIN rail module, two-section, divisible
Number of positions	2
Surge protection fault message	Optical, remote indicator contact

### Protective circuit

Nominal voltage $U_N$	60 V AC (TN-S)
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous voltage $U_C$	100 V AC
	80 V DC
Rated load current $I_L$	26 A (30 °C)
Residual current $I_{PE}$	≤ 5 $\mu$ A

## Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

### Technical data

#### Protective circuit

Nominal discharge current $I_n$ (8/20) $\mu$ s	2 kA
Standby power consumption $P_C$	$\leq 75$ mVA (at $U_{REF}$ )
	$\leq 150$ mVA (at $U_C$ )
Reference test voltage $U_{REF}$	66 V AC
Combination wave $U_{OC}$	4 kV
Voltage protection level $U_p$ (L-N)	$\leq 0.48$ kV
Voltage protection level $U_p$ (L-PE)	$\leq 0.9$ kV
Voltage protection level $U_p$ (N-PE)	$\leq 0.9$ kV
TOV behavior at $U_T$ (L-N)	120 V AC (5 s / withstand mode)
	120 V AC (120 min / withstand mode)
TOV behavior at $U_T$ (L-PE)	120 V AC (5 s / withstand mode)
	120 V AC (120 min / withstand mode)
Response time $t_A$ (L-N)	$\leq 25$ ns
Response time $t_A$ (L-PE)	$\leq 100$ ns
Response time $t_A$ (N-PE)	$\leq 100$ ns
Short-circuit current rating $I_{SCCR}$	1.5 kA AC
	1 kA DC
Max. backup fuse with branch wiring	Not required
Maximum backup fuse for through wiring	25 A (gG / B / C)

#### Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	N/C contact
Operating voltage	250 V AC
	125 V DC (200 mA DC)
Operating current	3 A AC
	1 A DC (30 V DC)
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
AWG conductor cross section	24 ... 12

#### Connection data

## Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

### Technical data

#### Connection data

Connection method	Screw connection
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
AWG conductor cross section	24 ... 12 (IEC)
	24 ... 12 (UL)
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm

#### UL specifications

UL class	SPD type 4CA
Maximum continuous operating voltage MCOV	100 V AC
	80 V DC
Nominal voltage	60 V DC
Mode of protection	L-N
	L-G
	N-G
	(L+) - (L-)
	(L+) - G
	(L-) - G
Power distribution system	1
Nominal frequency	50/60 Hz
Measured limiting voltage MLV (L-N)	540 V
Measured limiting voltage MLV (L-G)	740 V
Measured limiting voltage MLV (N-G)	740 V
Measured limiting voltage MLV (L+) - (L-)	540 V
Measured limiting voltage MLV (L+) - G	740 V
Measured limiting voltage MLV (L-) - G	740 V
Nominal discharge current I <sub>n</sub>	3 kA

### Classifications

#### eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130806
eCl@ss 8.0	27130803

# Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

## Classifications

ETIM

ETIM 5.0	EC000942
----------	----------

## Approvals

Approvals

Approvals

KEMA-KEUR / CCA / UL Recognized / cUL Recognized / EAC / GL / cULus Recognized

Ex Approvals


UL Recognized / cUL Recognized / cULus Recognized

Approvals submitted

## Approval details

KEMA-KEUR 

CCA

UL Recognized 


cUL Recognized 

EAC

GL

## Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

### Approvals

cULus Recognized 

### Accessories

#### Accessories

#### Device marking

Label - EML (20XE)R - 0803452



Label, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK X, THERMOMARK S1.1, Mounting type: Adhesive, Lettering field: continuous x 20 mm

Label - EML (20XE)R YE - 0803453



Label, Roll, yellow, unlabeled, can be labeled with: THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK X, THERMOMARK S1.1, Mounting type: Adhesive, Lettering field: continuous x 20 mm

#### End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

#### Marker pen

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

# Type 3 surge protection device - PLT-SEC-T3-60-FM - 2905225

## Accessories

### Spare parts


Type 3 surge protection plug - PLT-SEC-T3-60-P - 2905233



Replacement plug for type 3 device protection from the PLUGTRAB SEC T3 product range. 60 V nominal voltage.


## Drawings

Diagram

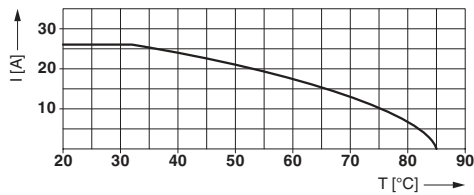


Nominal current depending on ambient temperature

Dimensional drawing

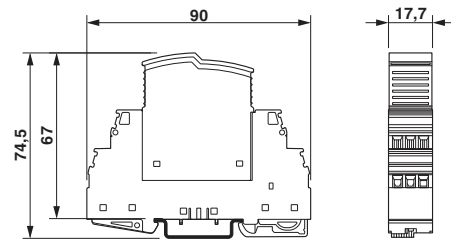

Product drawing



Circuit diagram

