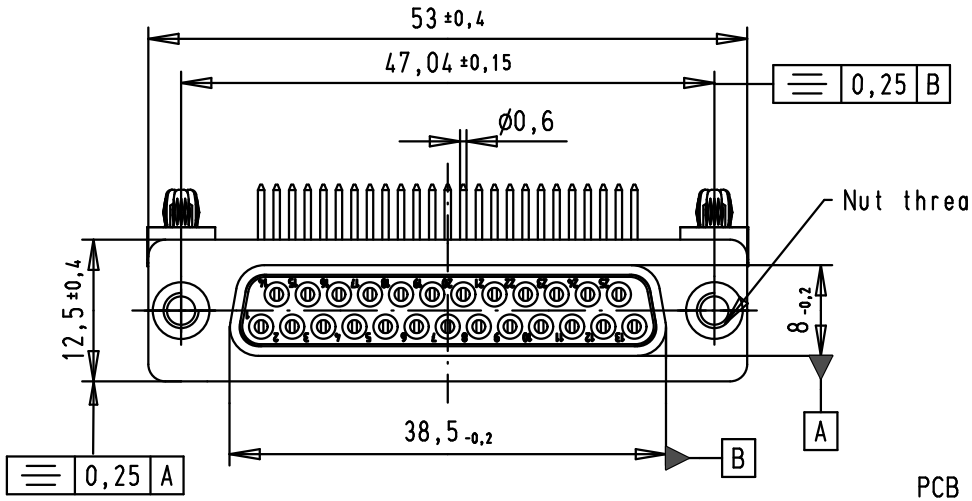

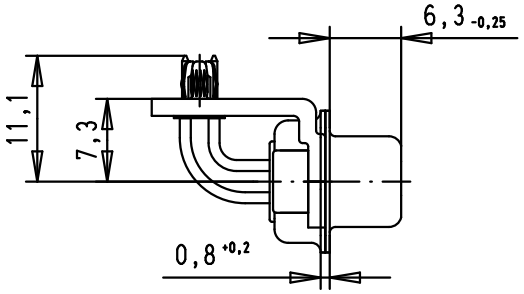

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

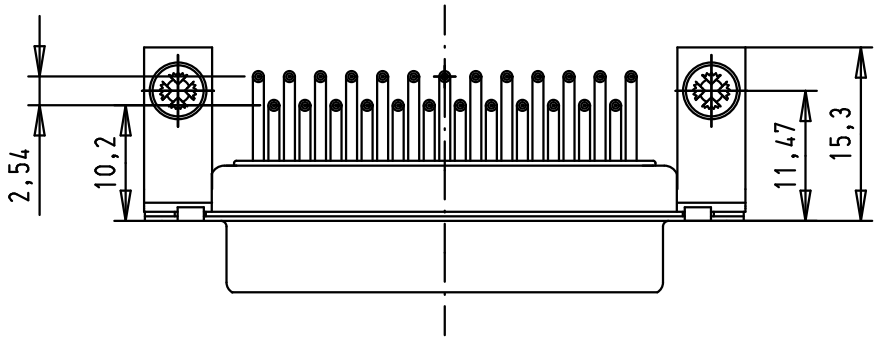

PCB Layout, Component side, thickness 1,6 mm

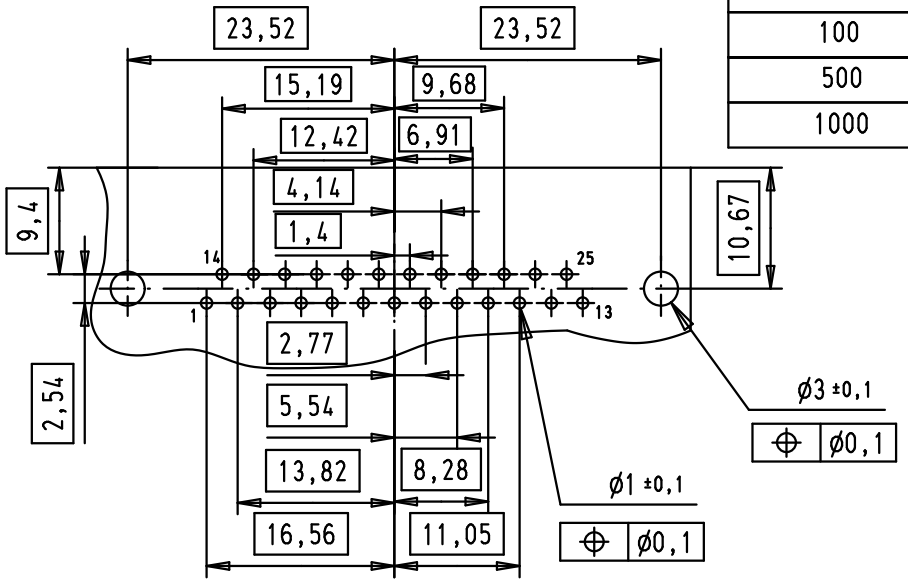

							Dat.	Name		
						Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, female, angled, 25 Poles, turned solder pins, board-locks and clinch nuts
						Insp.	12/01/12	JB		Ma?Mstab/ Scale 1.5:1
			36283	12/01/12	SD	Stand.				
09643147213	M3		33416	19/01/06	JMDR	HARTING EURL F-95972 Paris			TB 0964314721x	Blatt/ Page 1/4
09643147212	UNC 4-40		31058	8-JUL-02	CV				Sub.	
Part number	Nut thread		Mod.	Dat.	Name					