

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1



Conductor

Conductor count: 1
 Gauge: 32 AWG 0.03 mm²
 Material: tinned copper
 Strand size: \varnothing 0.2 mm (solid)
 Resistance at 20 °C: 563 Ω /km max

Insulator

Material: Polyphenylene Ether, Modified (mPPE)
 Color: purple
 Diameter: \varnothing 0.75 \pm 0.08 mm
 Nominal thickness: 0.26 mm
 Resistance at 20 °C: 100 M Ω /km min

Wire marking: E339579 UL AWM STYLE 11028 32 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

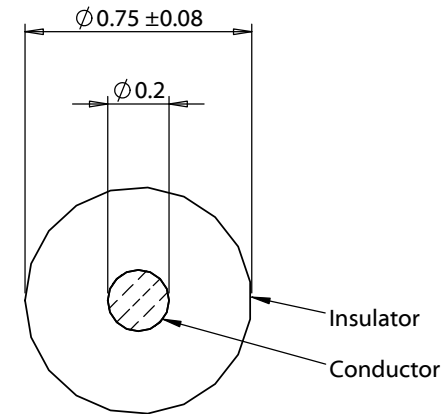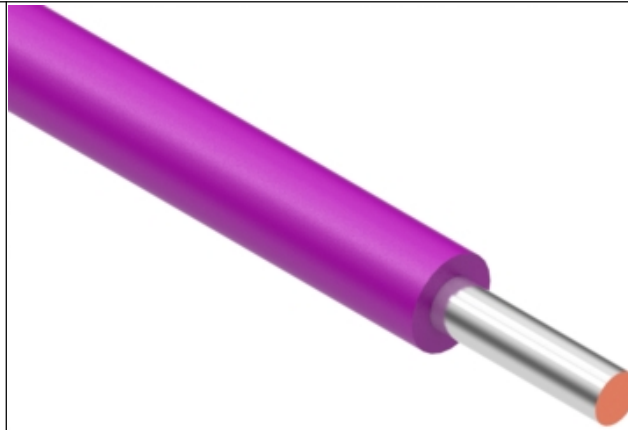

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2021.06.03 12:47:53 -07'00'</small>	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	6/3/2021	Initial release	Verified: JC <small>Digitally signed by JC Date: 2021.06.07 12:31:40 -07'00'</small>	RoHS compliant Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: \pm 0.5 mm X.X: \pm 0.3 mm X.XX: \pm 0.05 mm	Description: Wire, hook-up, tinned solid core, 32 AWG, UL 11028, 600V, 105C, 0.75 mm, mPPE, purple	Size: A Part number: 30-02139
					Scale: 40:1 Sheet 1 of 1

5

4

3

2

1