



## 30K5A1I SERIES II

### Thermistor

#### SPECIFICATIONS

- **Thermally conductive epoxy coating**
- **Ø 2.4 mm Maximum Diameter**
- **30 AWG Solid Silver Plated Copper Leads with White PTFE Insulation**
- **Choice of 4 temperature tolerance classifications**
- **RoHS Compliant**

The BetaCURVE Chip is Soldered to 30 AWG Solid Silver Plated Copper Leads with White PTFE Insulation Device is Encapsulated in Stycast Epoxy Resin.

## 30K5A1I SERIES II

Thermistor

### FEATURES

- Interchangeability
- Proven Stability and Reliability
- Rapid time response
- PTFE Insulated lead Wires
- Thermally Conductive Epoxy Coating
- Temperature range -40°C to +125°C


### APPLICATIONS

- Temperature sensing, control and compensation
- Tight Tolerance Instrumentation
- Assembly into probes for a wide variety of applications
- General Instrumentation applications

### PERFORMANCE SPECS

| Parameters                                      | Units   | Value |
|---|---------|-------|
| Nominal Resistance at +25°C                     | Ohms    | 30000 |
| 30K5A1iA Resistance tolerance from 0°C to +70°C | °C      | ± 0.1 |
| 30K5A1iB Resistance tolerance from 0°C to +70°C | °C      | ± 0.2 |
| 30K5A1iC Resistance tolerance from 0°C to +70°C | °C      | ± 0.5 |
| 30K5A1iD Resistance tolerance from 0°C to +70°C | °C      | ± 1.0 |
| Alpha Value at +25°C                            | %/°C    | 4.30  |
| Beta Value 25/85                                | K       | 3942  |
| Tolerance on Beta Value 25/85                   | %       | ± 0.5 |
| Time response in Liquids                        | Seconds | <1    |
| Dissipation Constant in still air               | mW/°C   | 0.85  |

### MECHANICAL DETAILS

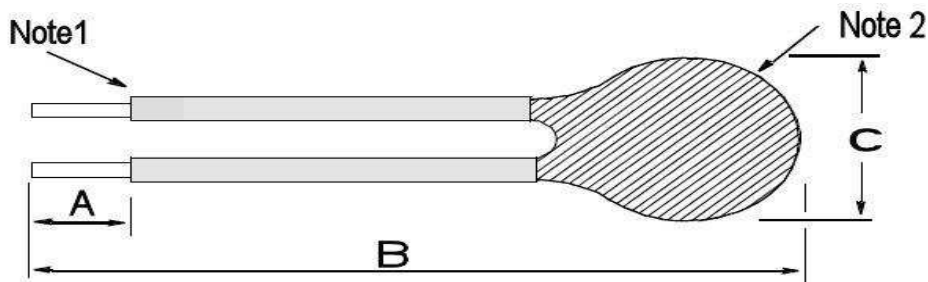

|               | Dimensions  |          |           |
|---------------|---|----------|-----------|
|               | A   | B        | C         |
|               | 10 ± 2mm  | 76 ± 2mm | 2.4mm Max |
| <b>Note 1</b> | 30AWG Solid Silver Plated Copper Leads with White PTFE Insulation |          |           |
| <b>Note 2</b> | White Stycast 2850ft Epoxy  |          |           |

**RESISTANCE V TEMPERATURE TABLE**

| Temp. °C | Ohms |
|----------|------|
|----------|------|

|     |        |
|-----|--------|
| -40 | 884198 |
| -39 | 830463 |
| -38 | 780301 |
| -37 | 733457 |
| -36 | 689693 |
| -35 | 648790 |
| -34 | 610546 |
| -33 | 574773 |
| -32 | 541299 |
| -31 | 509964 |
| -30 | 480620 |
| -29 | 453130 |
| -28 | 427367 |
| -27 | 403213 |
| -26 | 380560 |
| -25 | 359305 |
| -24 | 339357 |
| -23 | 320627 |
| -22 | 303035 |
| -21 | 286506 |
| -20 | 270969 |
| -19 | 256362 |
| -18 | 242622 |
| -17 | 229694 |
| -16 | 217526 |
| -15 | 206069 |
| -14 | 195278 |
| -13 | 185111 |
| -12 | 175529 |
| -11 | 166495 |
| -10 | 157975 |
| -9  | 149937 |
| -8  | 142352 |
| -7  | 135191 |
| -6  | 128429 |
| -5  | 122041 |
| -4  | 116006 |
| -3  | 110301 |
| -2  | 104907 |
| -1  | 99806  |
| 0   | 94980  |

| Temp. °C | Ohms |
|----------|------|
|----------|------|

|    |              |
|----|--------------|
| 1  | 90413        |
| 2  | 86090        |
| 3  | 81996        |
| 4  | 78119        |
| 5  | 74445        |
| 6  | 70964        |
| 7  | 67663        |
| 8  | 64534        |
| 9  | 61565        |
| 10 | 58749        |
| 11 | 56076        |
| 12 | 53539        |
| 13 | 51129        |
| 14 | 48841        |
| 15 | 46667        |
| 16 | 44601        |
| 17 | 42637        |
| 18 | 40769        |
| 19 | 38993        |
| 20 | 37303        |
| 21 | 35696        |
| 22 | 34166        |
| 23 | 32709        |
| 24 | 31321        |
| 25 | <b>30000</b> |
| 26 | 28741        |
| 27 | 27541        |
| 28 | 26398        |
| 29 | 25307        |
| 30 | 24268        |
| 31 | 23276        |
| 32 | 22329        |
| 33 | 21426        |
| 34 | 20564        |
| 35 | 19741        |
| 36 | 18955        |
| 37 | 18204        |
| 38 | 17487        |
| 39 | 16801        |
| 40 | 16146        |
| 41 | 15519        |

| Temp. °C | Ohms |
|----------|------|
|----------|------|

|    |       |
|----|-------|
| 42 | 14920 |
| 43 | 14347 |
| 44 | 13799 |
| 45 | 13274 |
| 46 | 12772 |
| 47 | 12292 |
| 48 | 11831 |
| 49 | 11391 |
| 50 | 10968 |
| 51 | 10564 |
| 52 | 10176 |
| 53 | 9805  |
| 54 | 9449  |
| 55 | 9107  |
| 56 | 8780  |
| 57 | 8466  |
| 58 | 8164  |
| 59 | 7875  |
| 60 | 7597  |
| 61 | 7331  |
| 62 | 7075  |
| 63 | 6829  |
| 64 | 6593  |
| 65 | 6366  |
| 66 | 6148  |
| 67 | 5939  |
| 68 | 5738  |
| 69 | 5544  |
| 70 | 5358  |
| 71 | 5179  |
| 72 | 5007  |
| 73 | 4841  |
| 74 | 4682  |
| 75 | 4528  |
| 76 | 4381  |
| 77 | 4239  |
| 78 | 4102  |
| 79 | 3970  |
| 80 | 3843  |
| 81 | 3721  |
| 82 | 3603  |
| 83 | 3489  |

| Temp. °C | Ohms |
|----------|------|
|----------|------|

|     |      |
|-----|------|
| 84  | 3380 |
| 85  | 3274 |
| 86  | 3172 |
| 87  | 3074 |
| 88  | 2979 |
| 89  | 2888 |
| 90  | 2800 |
| 91  | 2715 |
| 92  | 2633 |
| 93  | 2554 |
| 94  | 2477 |
| 95  | 2403 |
| 96  | 2332 |
| 97  | 2263 |
| 98  | 2197 |
| 99  | 2132 |
| 100 | 2070 |
| 101 | 2010 |
| 102 | 1952 |
| 103 | 1896 |
| 104 | 1842 |
| 105 | 1789 |
| 106 | 1739 |
| 107 | 1690 |
| 108 | 1642 |
| 109 | 1596 |
| 110 | 1552 |
| 111 | 1509 |
| 112 | 1467 |
| 113 | 1427 |
| 114 | 1388 |
| 115 | 1350 |
| 116 | 1314 |
| 117 | 1278 |
| 118 | 1244 |
| 119 | 1211 |
| 120 | 1178 |
| 121 | 1147 |
| 122 | 1117 |
| 123 | 1087 |
| 124 | 1059 |
| 125 | 1031 |

## 30K5A1I SERIES II

Thermistor

### ORDERING INFORMATION

| Part Number | Description  | $\Omega$ @25°C | MOQ   |
|-------------|--|----------------|-------|
| 30K5A1iA    | Series II Thermistor (Tol. $\pm 0.1^\circ\text{C}$ from $0^\circ\text{C}$ to $+70^\circ\text{C}$ ) | 30000          | 1000* |
| 30K5A1iB    | Series II Thermistor (Tol. $\pm 0.2^\circ\text{C}$ from $0^\circ\text{C}$ to $+70^\circ\text{C}$ ) | 30000          | 1000* |
| 30K5A1iC    | Series II Thermistor (Tol. $\pm 0.5^\circ\text{C}$ from $0^\circ\text{C}$ to $+70^\circ\text{C}$ ) | 30000          | 1000* |
| 30K5A1iD    | Series II Thermistor (Tol. $\pm 1.0^\circ\text{C}$ from $0^\circ\text{C}$ to $+70^\circ\text{C}$ ) | 30000          | 1000* |

\* For quantities less than Minimum Order Quantity – Contact Distribution

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
910 Turnpike Road  
Shrewsbury, MA 01545  
Tel: 1-508-842-0516  
Fax: 1-508-842-0342  
Sales:  
temperature.cs.amer@meas-spec.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel: +353-91-753238  
Fax: +353-91-770789  
Sales:  
temperature.cs.emea@meas-spec.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Sales:  
temperature.cs.asia@meas-spec.com

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.