
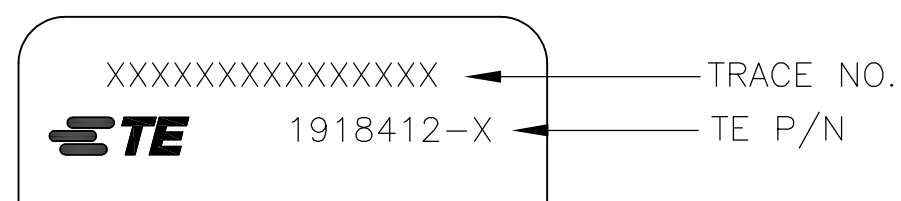


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-16-009990	06JUL16	KG	SM

1. MAXIMUM INSERTION LOSS IS 0.4dB AT 850nm.
2. SEE TRACE LABEL DETAIL.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE SPEC TEC-138-702.

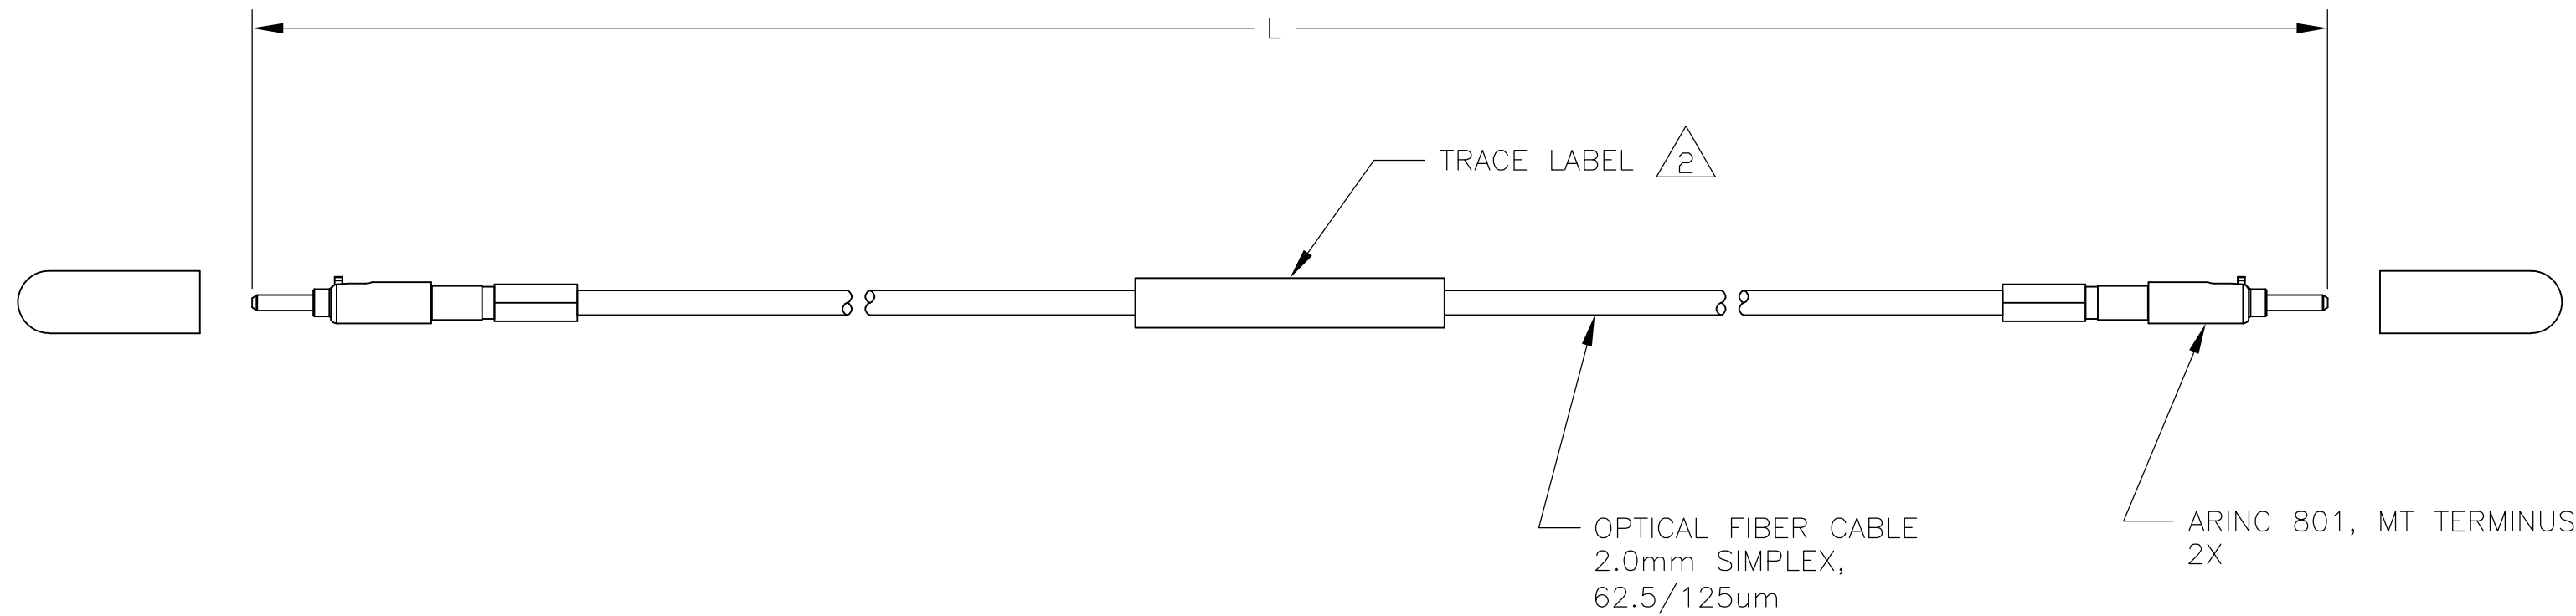

2 TRACE LABEL DETAIL
(NOT TO SCALE)

0.610±0.013 [24.0±0.5]	1918412-5
0.305±0.013 [12.0±0.5]	1918412-4
1.100+0.020/-0.0 [43.3+0.8/-0.0]	1918412-3
0.400+0.020/-0.0 [15.7+0.8/-0.0]	1918412-2
3.810±0.080 [150.0±3.1]	1918412-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 14MAR06	TE Connectivity																
DIMENSIONS: METERS [INCHES]		CHK J.BARRY 14MAR06																	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.BARRY 14MAR06	NAME CABLE ASSEMBLY, FO, 2.0mm SIMPLEX 62.5/125um CABLE ARINC 801 MT TO ARINC 801 MT																
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> <tr><td>FINISH</td><td>-</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	FINISH	-	PRODUCT SPEC -	APPLICATION SPEC -	SIZE A2	CAGE CODE 00779
0 PLC	± -																		
1 PLC	± -																		
2 PLC	± -																		
3 PLC	± -																		
4 PLC	± -																		
ANGLES	± -																		
FINISH	-																		
MATERIAL -		WEIGHT 0	DRAWING NO 1918412		RESTRICTED TO -														
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV A														