# 2SB815/2SD1048

# ON Semiconductor®

http://onsemi.com

# **Bipolar Transistor**

(-)15V, (-)0.7A, Low VCE(sat), (PNP)NPN Single CP

#### **Features**

- · Ultrasmall package allows miniaturization in end products
- · Large current capacity (IC=0.7A) and low-saturation voltage

# Specifications ( ): 2SB815


#### Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Collector to Base Voltage	VCBO		(-)20	V
Collector to Emitter Voltage	VCEO		(-)15	V
Emitter to Base Voltage	VEBO		(-)5	V
Collector Current	IC		(-)0.7	Α
Collector Current (Pulse)	ICP		(-)1.5	Α
Collector Dissipation	PC		200	mW
Junction Temperature	Tj		125	°C
Storage Temperature	Tstg		-55 to +125	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### **Package Dimensions**

unit : mm (typ) 7013A-009

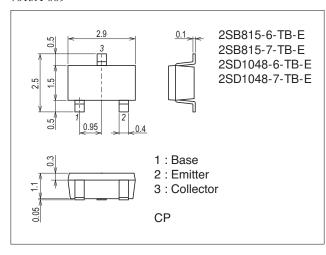


# **Product & Package Information**

• Package : CP


• JEITA, JEDEC : SC-59, TO-236, SOT-23, TO-236AB

• Minimum Packing Quantity: 3,000 pcs./reel


#### Packing Type: TB



#### Marking



#### **Electrical Connection**



# 2SB815 / 2SD1048

# **Electrical Characteristics** at Ta=25°C


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	Offic
Collector Cutoff Current	ICBO	V <sub>CB</sub> =(-)15V, I <sub>E</sub> =0A			(-)0.1	Α
Emitter Cutoff Current	IEBO	V <sub>EB</sub> =(-)4V, I <sub>C</sub> =0A			(-)0.1	Α
DC Current Gain	hFE1	V <sub>CE</sub> =(-)2V, I <sub>C</sub> =(-)50mA	200*		600*	
	hFE2	V <sub>CE</sub> =(-)2V, I <sub>C</sub> =(-)500mA	80			
Gain-Bandwidth Product	fŢ	V <sub>CE</sub> =(-)10V, I <sub>C</sub> =(-)50mA 250			MHz	
Output Capacitance	Cob	V <sub>CB</sub> =(-)10V, f=1MHz		(13)8		pF
Collector to Emitter Saturation Voltage	V <sub>CE</sub> (sat)1	I <sub>C</sub> =(-)5mA, I <sub>B</sub> =(-)0.5mA		(-15)10	(-35)25	mV
	V <sub>CE</sub> (sat)2	I <sub>C</sub> =(-)100mA, I <sub>B</sub> =(-)10mA		(-60)30	(-120)80	mV

### $^{\star}$ : The 2SB815/2SD1048 are classified by 50mA hFE as follows :

Rank	6	7
hFE	200 to 400	300 to 600

# **Ordering Information**


Device	Package	Shipping	memo
2SB815-6-TB-E	СР	3,000pcs./reel	
2SB815-7-TB-E	СР	3,000pcs./reel	Pb Free
2SD1048-6-TB-E	СР	3,000pcs./reel	Pb Free
2SD1048-7-TB-E	СР	3,000pcs./reel	

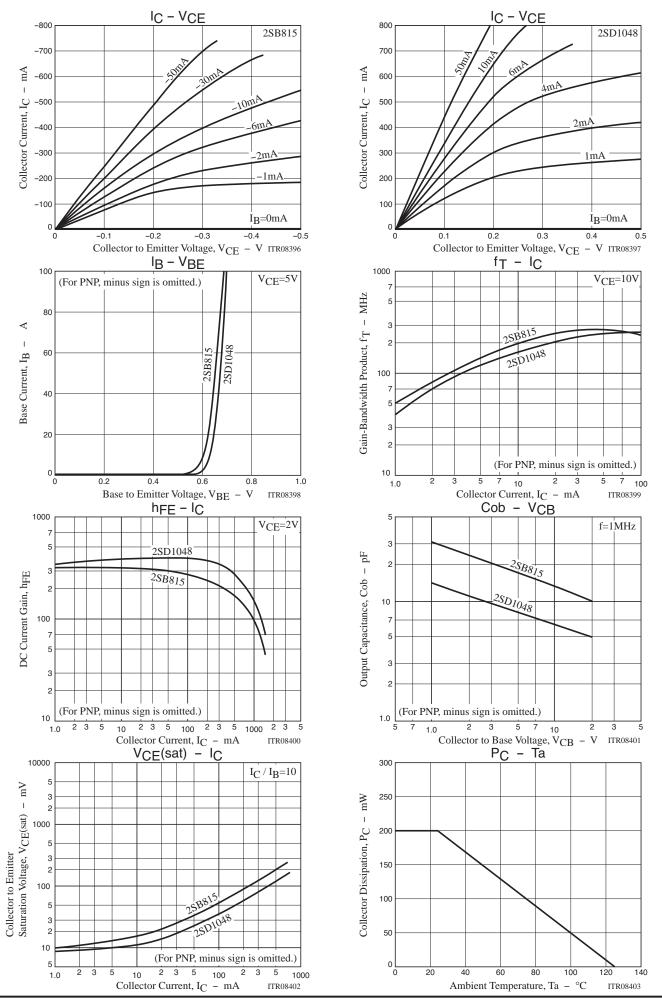


#### **Outline Drawing**

#### **Land Pattern Example**

2SB815-6-TB-E, 2SB815-7-TB-E, 2SD1048-6-TB-E, 2SD1048-7-TB-E

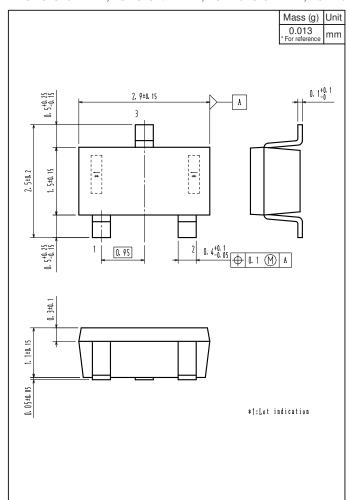

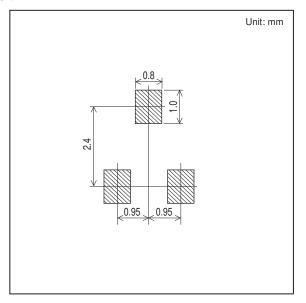

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa