

### Features

- Frequency range : 170MHz to 2100MHz
- SMD seam sealing ceramic package
- Supply voltage : 2.5V, 3.3V
- LVPECL output
- Low phase noise and phase jitter
- Tri-state function available
- External dimensions (mm)  
L : 5.0 x W : 3.2 x H : 1.2
- RoHS compliant & Pb free

### Applications

- Networking, Telecommunication, Data communication, Switch, Server, Storage
- Fibre channel, Ethernet, SONET, SATA, SAS, PCI-Express
- Optical module
- Microprocessor, DSP, FPGA, Clock source for ADC and DAC
- Test and measurement

### Electrical Characteristics

Item	QTM532PH	Conditions
Frequency Range ( $F_0$ )	170MHz ~ 2100MHz	
Frequency Stability ( $F_{stab}$ ) over Operating Temperature Range ( $T_{OTR}$ )	$\pm 50$ ppm, $\pm 25$ ppm	$-40^\circ\text{C} \sim +85^\circ\text{C}$ , Note [1]
Operating Temperature Range ( $T_{OTR}$ )	$-40^\circ\text{C} \sim +85^\circ\text{C}$	
Supply Voltage ( $V_{DD}$ )	2.5V, 3.3V	$V_{DD} \pm 10\%$
Current Consumption ( $I_{DD}$ )	100 mA Max.	
Output Type	LVPECL	
Output Load	50 $\Omega$ ( $V_{DD} - 2.0\text{V}$ )	
Output Voltage High ( $V_{OH}$ )	$V_{DD} - 1.165$ Min.	
Output Voltage Low ( $V_{OL}$ )	$V_{DD} - 1.55$ Max.	
Rise & Fall Time ( $T_r / T_f$ )	0.5 ns Max.	20% ~ 80% of output swing
Duty Cycle	45% ~ 55%	
Start-up Time	10 ms Max.	
Enable Voltage High, Logic "1"	70% $V_{DD}$ Min.	Input to OE pin Note [2]
Enable Voltage Low, Logic "0"	30% $V_{DD}$ Max.	
Phase Jitter ( $F_0 = 622.08\text{MHz}$ )	150fs Typ. / 200fs Max.	12kHz ~ 20MHz, RMS
Aging ( $F_{aging}$ )	$\pm 3$ ppm Max.	at $25^\circ\text{C} \pm 3^\circ\text{C}$ , first year
Storage Temperature Range ( $T_{STR}$ )	$-55^\circ\text{C} \sim +125^\circ\text{C}$	


#### Notes:

[1] Inclusive of frequency tolerance at  $25^\circ\text{C}$ , variations over temperature, supply voltage and vibration.

[2] Output will be enabled if OE is Logic "1" or Open; Output will be disabled if OE is Logic "0".

[3] The standard testing environment except temperature test is  $25^\circ\text{C} \pm 5^\circ\text{C}$ , 40%~70% relative humidity.

### Dimensions

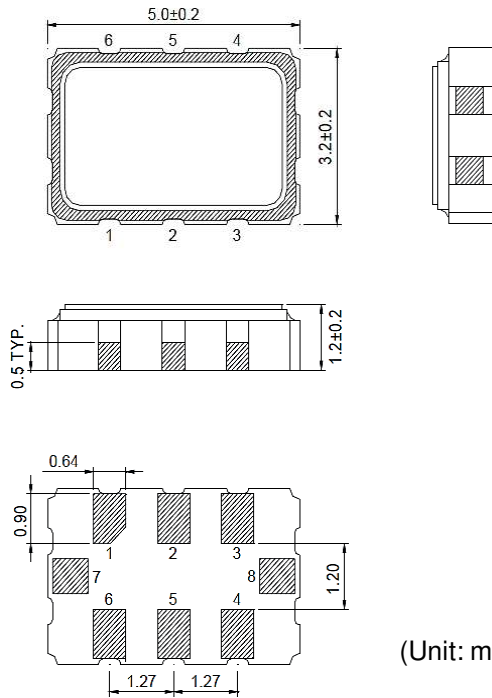


(Unit: mm)

\* Pad dimension tolerance is ±0.2mm

### Pin function


Pin 1	OE
Pin 2	NC
Pin 3	GND
Pin 4	OUT
Pin 5	$\overline{\text{OUT}}$
Pin 6	V <sub>DD</sub>
Pin 7	NC
Pin 8	NC

### Recommended pad layout

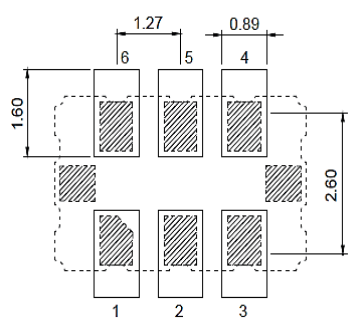


\* Power supply decoupling capacitor is required.

### Ordering Information

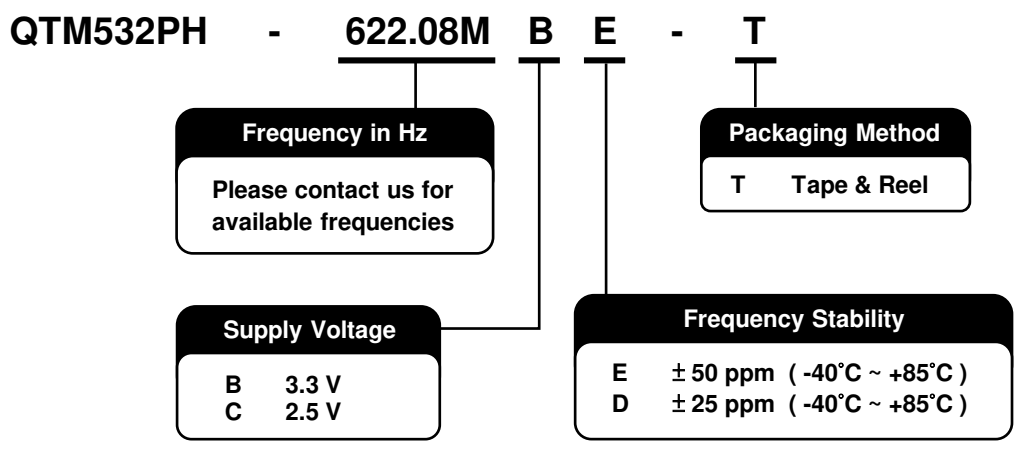

### Packing

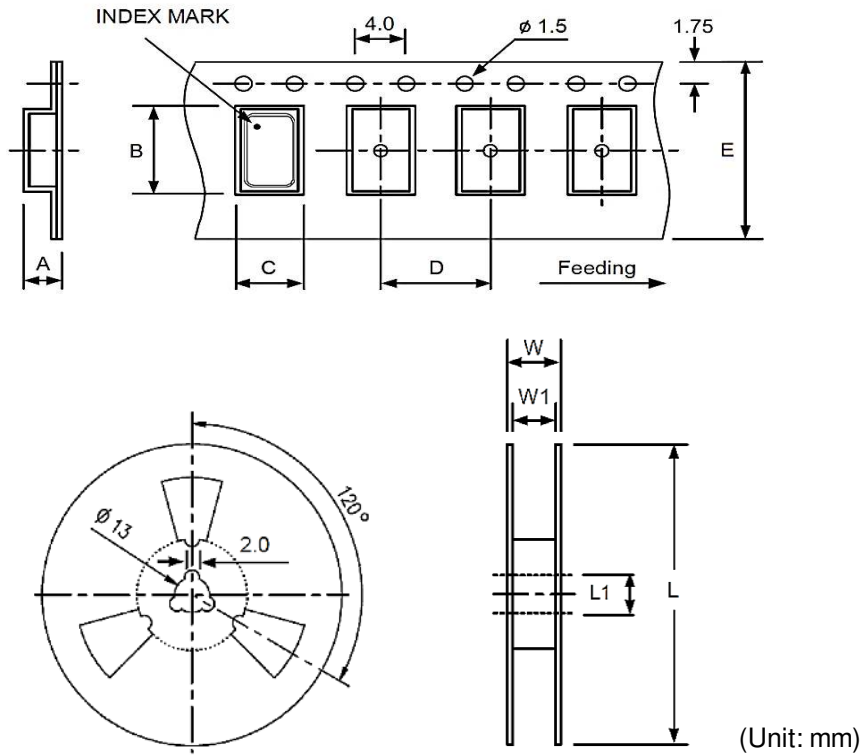

DIMENSIONS	A	B	C	D	E	L	L1	W	W1
	1.40	5.40	3.60	8.00	12.0	180.0	13.0	16.5	12.0

### Reflow Profile

Solder melting point : 220°C ± 10°C, 60 sec. Min., 200 sec. Max.

Peak temperature : 260°C ± 10°C, 10 sec. Min., 30 sec. Max.

