

工	G	нт. П	m	C C



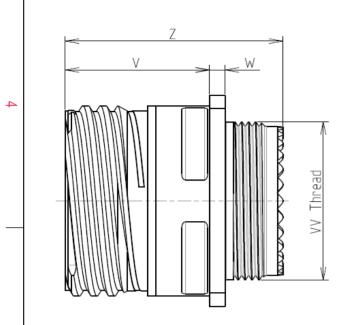

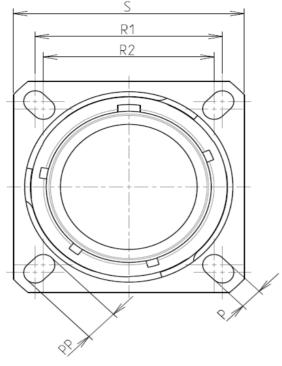

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium				
	-Shell Plating	: Olive drab Cadmium				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
	-Durability	: 500 Mating cycles				
	-Delivered with Souriau contacts and Accessories					
	-Temperature Range	-65°C to +175°C				
	-Salt Spray	: 500 hours				

: 13.92 g ± 10%

8D 0

G

11

-

W

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
РР	4.93±0.2				
R1	20.62				
R2	18.26				
S	26.2±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M15x1-6g				

п	r	п	τ	-	0		σ		Þ	7
	S R1 R2 V					YOUT SHOWN AS F	EXAMPLE			4
Keying Shown					LA	YOUT SHOWN AS I	EXAMPLE			
	Connector of Dim P PP R1 R2 S V V W Z VV THREAD	Nominal 3.25±0.2 4.93±0.2 20.62 18.26 26.2±0.3 20.83+0/-1.25 2.1/2.5 31.5 Max M15x1-6g			due to a use the Specification (profess	not be liable for ar e of the Products w s issued by either of ional recommenda Count FR PN: 8D011	hich does not co of the Parties or b tion, technical n ry Jurisc	mply with by a third party		2
			[A 08-10-201	6 First Release					-
			-	ISS DATE Designed By:	Latest modification			CUSTOMER DRAWIN	MOD N°	-
			-	TITLE		Aluminiur	n Receptac	le 8D series		
22 B E			_	SCALE NA		General linear Tolerances: ±		NPRDS / PROJECT 859		1
	CONTACT	ORIEN T TYPE : SOCKET(50	TATION : E) Matings)	SOURIAL	J www	SOURIAU.	COM	This document is the SOURIAU it must not be repr communicated withou	oduced or	
		CONTACT LAYO		format A3		SOURIAL 8D011W			SHEET	_
F		E		D	С		B		A	

		Contact Layout				Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(0 0 ⁴ c ⁰ 0 ⁸			م ح	
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905	- - -		<u></u>	ØI.
ယ	C D	-1.905 -1.905 -1.905 1.905				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
2						Count FR PN: 8D011
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_ <u>+</u>					SCALE NA	Aluminiur General linear Tolerances: ±
					FORMAT	SOURIAL
	Н	G	F	E	D A3	8D011W

Т

ш

т

G

0

