


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/14/16	D.N.

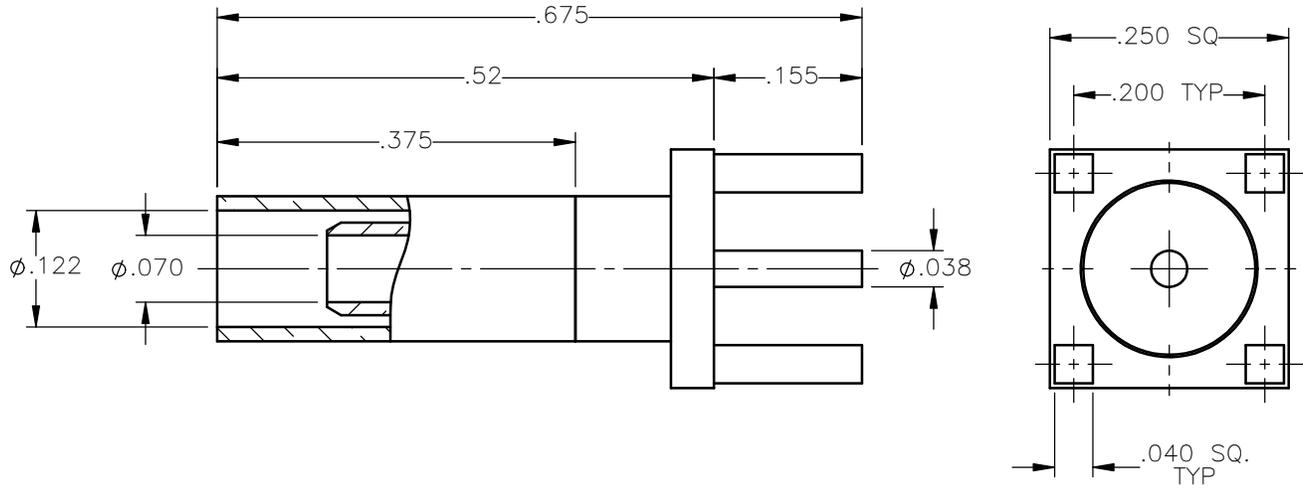


NOTES:

MATERIALS:

- BODY & CONTACT = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
- INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
- CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50 EXCEPT YIELD STRENGTH.

FINISHES:

- BODY & CRIMP SLEEVE = GOLD PLATE PER ASTM B488-11, TYPE II, 30 μ in MIN, GRADE C OVER 100 TO 200 μ in COPPER STRIKE PER AMS 2418.
- CONTACT = GOLD PLATE PER ASTM B488-11, TYPE II, 50 μ in MIN, GRADE C, OVER 100 TO 200 μ in STRESS FREE SULFAMATE NICKEL PER AMS-QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.		
	D.N.	04/14/16			
DECIMAL	ANGLE	CHKD:	DATE	STRAIGHT P.C.B. MOUNT CABLE TERMINATION CRIMP TYPE FOR RG-316 & SIMILAR CABLES	
		N.D.	04/14/16		
		APVD:	DATE		
		J.M.	04/14/16	REV A	
REFERENCE:	MATERIALS & FINISHES:	SIZE	FSCM NO.	DWG NO.	THIRD ANGLE PROJECTION
ORIGINATED: D.N. DATE: 04/14/16	SEE NOTES	A	19505	8146-1521-003	
		SCALE	5:1		SHEET 1 OF 1

8146-1521-003