Rotary Potentiometer

P120 Series




Features:


- 12 mm
- Conductive plastic element
- Single/dual unit
- 100,000 cycle life
- Insulated shaft
- RoHS compliant



Model Styles

Side Adjust, PCB pins, Single unit	P120K
Top Adjust, PCB pins, Single unit	P120PK
Top Adjust, PCB pins, Dual unit	P120KGP
Side Adjust, PCB pins, Dual unit	P120KGE

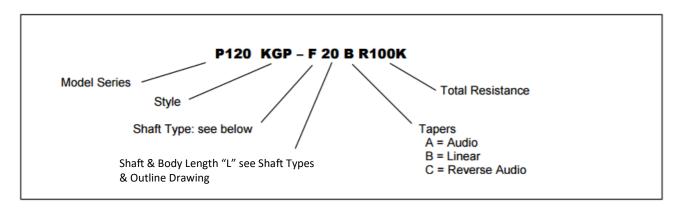

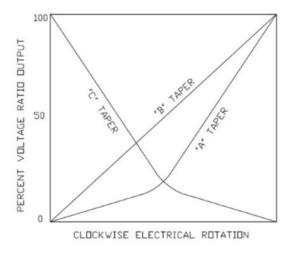

Rotary Potentiometer

P120 Series



Electrical Specifications	
Resistance Range, Ohms	1K- 1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	0.05w
Dielectric Strength	300Vac, I minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Gang Error (Multi-ganged)	-40dB - 0dB, ±3dB
Actual Electrical Travel, Nominal	260°

Mechanical Specifications

Total Mechanical Travel	300°± 10°
Static Stop Strength	50 oz-in
Rotational Torque	0.5 to 1.25 oz-in

Environmental Specifications

Operating Temperature Range	-40°C to +85°C
Rotational Life	100,000 cycles


Issue C 05/2020 Page 2

Rotary Potentiometer


P120 Series



Shaft Types

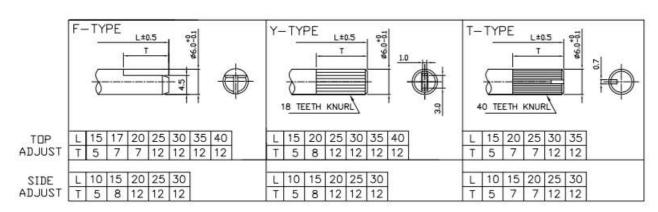


Standard Resistance Values, Ohms



CIRCUIT DIAGRAM

Unless otherwise specified




Issue C 05/2020 Page 3




Outline Drawings

Model P120K (Side Adjust, PCB pins, Single unit)

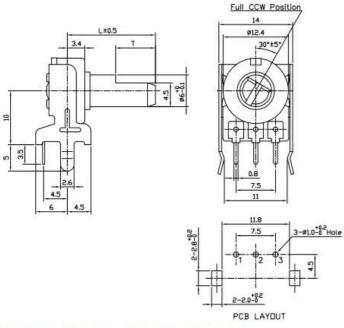


Model P120PK (Top Adjust, PCB pins, Single unit)

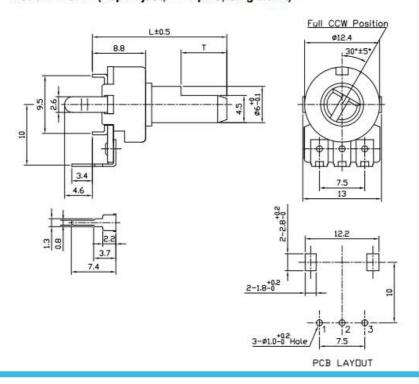



Outline Drawings

Model P120KGP (Top Adjust, PCB pins, Dual unit)

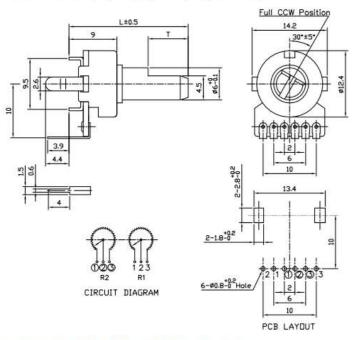

Model P120KGE (Side Adjust, PCB pins, Dual unit)

