

6

5




4

3

2

1

FEMALE FACE VIEW

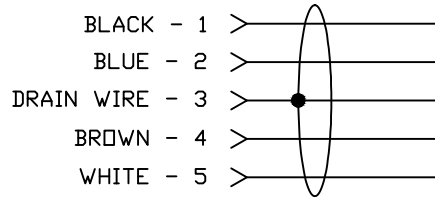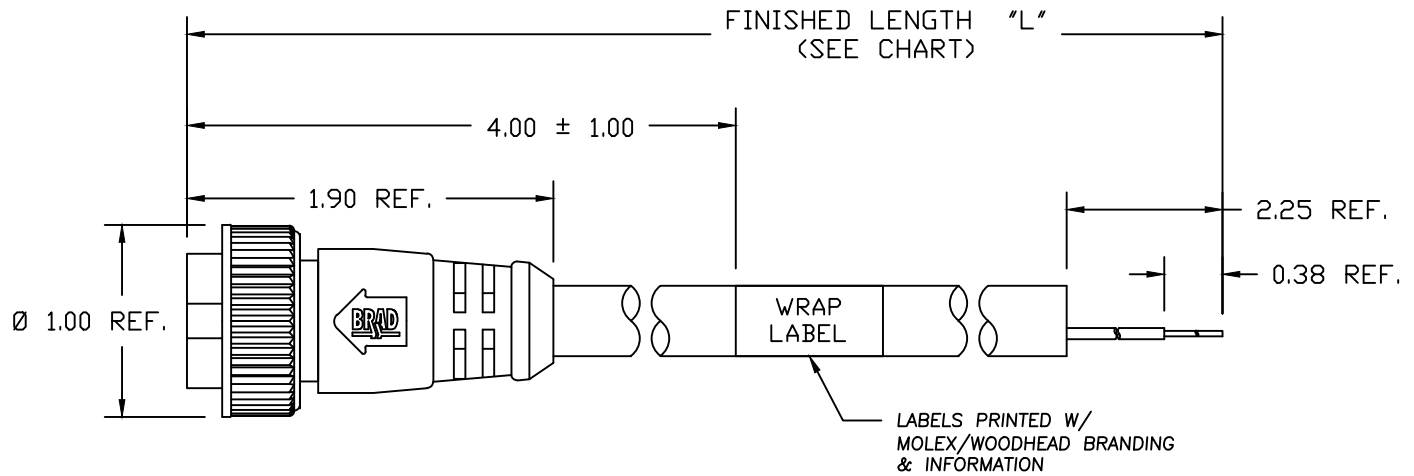

SPECIFICATIONS:

COUPLING NUT MATERIAL: ZINC DIE-CAST WITH
BLACK ELECTROPHORETIC COATING
CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
INSERT MATERIAL: YELLOW PVC
OVERMOLD: YELLOW PVC

CABLE: #22/4 BLACK PVC,
BRAIDED SHIELD w/ #22 DRAIN

ASSEMBLY RATINGS: 250V, 3A
ENVIRONMENTAL: -20°C TO +105°C,
IP67 WHEN MATED

| SAP P/N# | "L" (FEET) | "L" (INCH) | TOLERANCE (INCH) |
|------------|------------|------------|------------------|
| 1300062308 | 12' | 144" | +3.50/-0.0 |

| | | | | | | | | | |
|--|----------------------------|--|-------|---------------------------|---|--|-------------------|------------------------|--|
| A201213222-1 RELEASE EC NO: IFC2012-0162 DRWN: YOU 2011/12/28 CHKD: LHARTMAN APPR: JFMURPHY 2012/03/03 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE INCH ONLY | | SCALE 1:1 | DESIGN UNITS INCH | THIRD ANGLE PROJECTION | |
| | $\nabla=0$ $\nabla/C=0$ | | mm | INCH | DRAWN BY DATE | TITLE | | | |
| | | 4 PLACES | ±--- | ±--- | YOU 2011/12/28 | MC CABLE ASSY SPCL 5P FEM STRAIGHT #22/4 + DRN PVC CABLE | | | |
| | | 3 PLACES | ±--- | ±.005 | CHECKED BY DATE | | | | |
| | 2 PLACES | ±.13 | ±.010 | LHARTMAN 2012/01/05 | MOLEX INCORPORATED | | | | |
| | 1 PLACE | ±.25 | ±.020 | APPROVED BY DATE | | | | | |
| | | ANGULAR ± 5° | | JFMURPHY 2012/03/03 | DOCUMENT NO. SD-130006-042 | | | | |
| | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SEE CHART | | SHEET NO. 1 OF 1 | | | |
| 1 | REV | | | SIZE A | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | |

6

5

4

3

2

1