

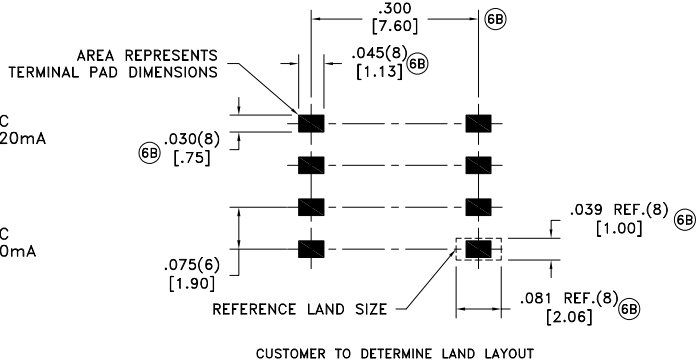



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

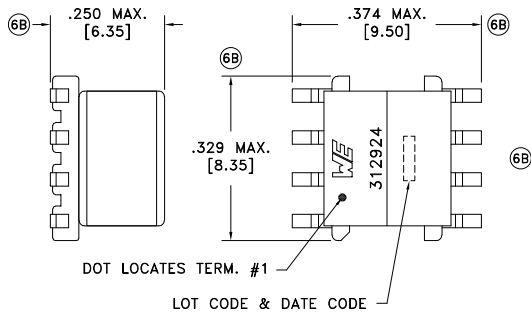

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
6C 6B D.C. RESISTANCE	2-3 @20°C	0.225 ohms ±10%
6B D.C. RESISTANCE	5-6 @20°C	0.260 ohms ±10%
6C 6B D.C. RESISTANCE	7-8 @20°C	0.175 ohms ±10%
INDUCTANCE	2-3 10kHz, 100mVAC, Ls	26.0uH ±10%
SATURATION CURRENT	20% rolloff from initial	550mA
LEAKAGE INDUCTANCE	2-3 tie(5+6+7+8), 100kHz, 100mVAC, Ls	0.5uH typ., 1.0uH max.
DIELECTRIC	2-8 tie(6+7), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(2-3):(6-5)	1:1, ±1%
URNS RATIO	(2-3):(8-7)	2:1, ±2%


GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications
6C	10/19	Method: Tape & Reel PKG-0951 www.we-online.com/midcom
6B	1/14	
6A	6/13	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE	PART NO.
TRANSFORMER	750312924
eiSos p/n: 750312924	SPECIFICATION SHEET 1 OF 1

