



Electrical specifications

Center Frequency: 2355 MHz
Bandwidth: 10 MHz
Insertion Loss: 1.0 dB Max
Passband Variation over Bandwidth: 0.5 dB Max
Return Loss: 20 dB Min
Group Delay Variation over Bandwidth: 5ns Max
Rejection 1: 13 dB @ 13 MHz offset from Fo
Rejection 2: 20 dB @ 20 MHz offset from Fo
Power Handling: 20 W Average, 150 W Peak


Mechanical

Connector Type: SMA (F)
Dimensions: 170 x 140 x 54 mm

Environmental

Operating Temperature: 0 to +50° C

Outline Drawing:

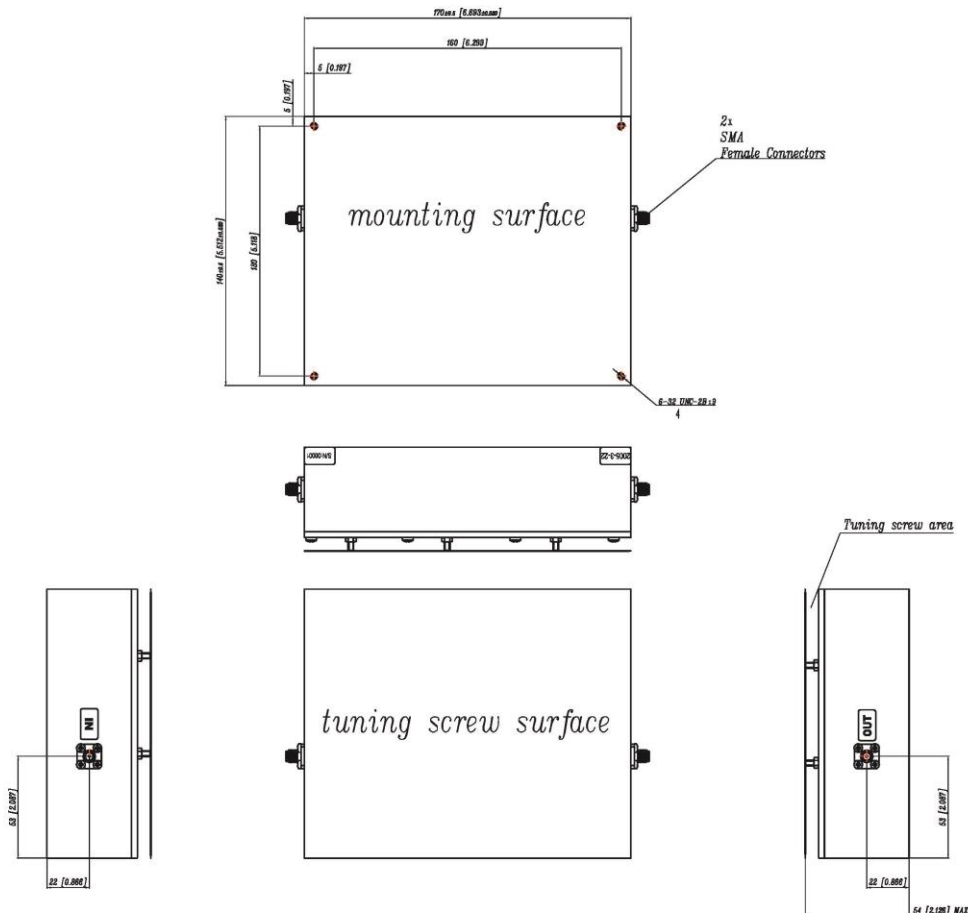



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2350-2360 MHz Cavity Bandpass Filter

Part Number: AB2355B992



Plot:

