

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC

REVISION HISTORY

REV	DESCRIPTION	SALES	RFS	DATE	APPROVED
A	INITIAL RELEASE	SO	19112	8/4/2010	HM
B	UPDATED DRAWING TITLE, REMOVED WALL PLUG-IN			8/11/2010	HM

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Authorized Representative Name:

Authorized Representative Signature:


Foot Note:

Globtek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

Globtek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

 GlobTek, Inc. www.globtek.com	Drawing Title: SWITCHING POWER SUPPLY, UNIVERSAL INPUT	
	18 WATTS, 9.0 VOLTS @ 2.0 AMPS	
186 Veterans Drive, Northvale, NJ 07467 Tel. 201-784-1000 Fax 201-784-0111	MODEL NO: GT-41082-1809-T3	
	PART NO: TR9CD2000LCP-N(RV)	REV B

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC

1. NOTES:

DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE.



2. ELECTRICAL SPECIFICATIONS:

INPUT VOLTAGE:	100-240	VAC
INPUT CURRENT:	0.6	Amp RMS MAX
INPUT FREQUENCY:	47-63	Hz

OUTPUT VOLTAGE:	9	VDC
OUTPUT CURRENT:	2	A, NO MINIMUM LOAD REQUIRED TO MAINTAIN OUTPUT VOLTAGE REGULATION
OUTPUT POWER (RATED):	18	WATTS MAX

OUTPUT LOAD REGULATION: +/- 5% MEASURED AT O/P CONNECTOR
 LINE VOLTAGE REGULATION: +/- 1% TYPICAL MEASURED AT THE OUTPUT CONNECTOR
 OUTPUT RIPPLE (PEAK TO PEAK): 1% OR 150 mV WHICHEVER IS GREATER. MEASURED AT 20 MHz BANDWIDTH WITH 0.1 µf CERAMIC CAPACITOR IN PARALLEL WITH 10 µf ELECTROLYTIC CAPACITOR CONNECTED AT THE END OF OUTPUT CONNECTOR AT NOMINAL LINE
 TURN-ON/TURN-OFF OVERSHOOT: 5% MAXIMUM, 1mS TYPICAL RECOVERY TIME FOR 25% STEP LOAD
 TURN-ON DELAY: 1 SECOND, TYPICAL
 HOLD-UP TIME: 8mS TYPICAL AT NOMINAL INPUT VOLTAGE AND FULL LOAD
 INRUSH CURRENT: 30A TYPICAL AT 115VAC INPUT AND 60A TYPICAL AT 230 VAC INPUT
 SWITCHING FREQUENCY: 65 KHz TYPICAL

PROTECTION

OVER-VOLTAGE: PROTECTED WITH ZENER CLAMP ACROSS OUTPUT
 SHORT CIRCUIT: PROTECTED, UNIT WILL RECOVER UPON REMOVAL OF FAULT
 INPUT: INPUT LINE FUSING

SAFETY:

DIELECTRIC WITHSTAND VOLTAGE: 4242 VDC FROM PRIMARY TO SECONDARY
 EARTH LEAKAGE: <3.5 mA AT 240 VAC INPUT VOLTAGE

APPROVALS

[SAFETY DOCUMENTS ARE AVAILABLE ONLINE BY CLICKING THIS LINK.](#)

SAFETY APPROVAL: UL60950-1, CUL TO 22.2 #60950-1, NEMKO TO 60950-1, CCC TO GB4943-2001, GB9254-1998, GB17625.12003, GOST-R CE CLASS I, AS/NZ TO 60950 (PENDING) , C-TICK TO 55022 (PENDING), PSE TO J60950, CB REPORT

EMI: COMPLIES WITH EN55022 CLASS B AND FCC PART 15 CLASS B, VCCI WHEN TESTED WITH RESISTIVE LOAD, BOTH CONDUCTED AND RADIATED EMI

CE MARK: TESTED TO COMPLY WITH EN55022:1998_A1:2000, EN610003-2, E610003-3 INCLUDING EN61204-3:2000, EN61000-4-2, EN61000-44-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11

C-TICK: TESTED TO COMPLY WITH AUSTRALIA SECTION 182 OF THE RADIO COMMUNICATION ACT OF 1992.

EFFICIENCY: ENERGY STAR VERSION 2.0 REGISTERED, LEVEL V
 COMPLIES TO SECTION 301 OF THE ENERGY INDEPENDENCE AND SECURITY ACT (EISA)
 CECP TIER 2 (CHINA), MEPS TIER 2 (AUSTRALIA), CODE OF CONDUCT (EUROPE)

OTHERS

MTBF: 200,000 HOURS AT 25°C AMBIENT TEMPERATURE
 OPERATING TEMPERATURE: 0°C TO 40° C AMBIENT TEMPERATURE
 HUMIDITY: 0% TO 90% RELATIVE HUMIDITY
 STORAGE TEMPERATURE: -10°C TO -80° C
 RoHS: COMPLIES WITH EU 2002/95/EC AND CHINA SO/T 11363-2006

GlobTek, Inc.

www.globtek.com

186 Veterans Drive, Northvale, NJ 07467

Tel. 201-784-1000 Fax 201-784-0111

Drawing Title: SWITCHING POWER SUPPLY, UNIVERSAL INPUT

18 WATTS, 9.0 VOLTS @ 2.0 AMPS

MODEL NO: GT-41082-1809-T3

PART NO: TR9CD2000LCP-N(RV)


REV B

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC

3. ENCLOSURE:

MATERIAL: 94V-0 POLYCARBONATE
COLOR: COOL GRAY PANTONE # 11C
DIMENSIONS: 50.0 x 80.6 x 31.1mm +/- 1.0
AC INLET: IEC 60320 / C14

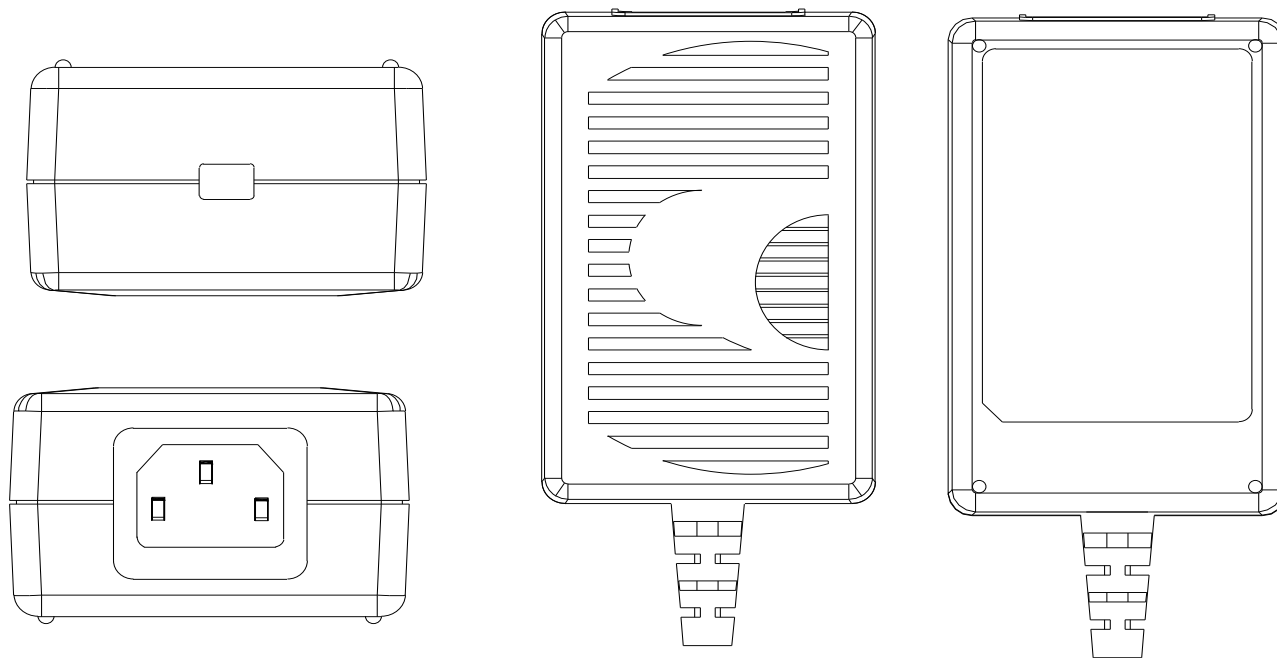

GlobTek, Inc.
www.globtek.com

186 Veterans Drive, Northvale, NJ 07467
Tel. 201-784-1000 Fax 201-784-0111


Drawing Title: SWITCHING POWER SUPPLY, UNIVERSAL INPUT	
18 WATTS, 9.0 VOLTS @ 2.0 AMPS	
MODEL NO: GT-41082-1809-T3	
PART NO: TR9CD2000LCP-N(RV)	REV B

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC

5. OUTPUT CORD AND CONNECTOR:

ACTUAL CONNECTOR'S, OVERMOLDS, FERRITES, MAY VARY SLIGHTLY FROM THE PICTURE BELOW

	EQUIVALENT	Y / N	
	CABLE TYPE		1C + SHIELD UL 1185
	CABLE LENGTH		1530mm + 150 - 0
	WIRE GAUGE (AWG)		18AWG
	HANK DIMENSION		70 ± 10mm
	CABLE / CONNECTOR OVERMOLD COLOR		COOL GRAY PANTONE # 11C
	FERRITE TYPE / DIMENSION		14.2 x 28.5 x 8.2mm
	FERRITE # OF TURNS		2
	FERRITE DIMENSION FROM STRAIN RELIEF		50 ± 10mm
	FERRITE DIMENSION FROM PLUG		N/A
	PLUG TYPE	Y	BARREL
	OVER MOLD ORIENTATION		STRAIGHT
	PLUG DIMENSIONS		5.5 x 2.5 x 11mm
	BARREL PLUG INTERNAL SPRING CLIP		NO
	BARREL PLUG LOCKING NOTCH		NO
	POLARITY		CENTER POSITIVE
	STRIP LENGTH		N/A
	TIN LENGTH		N/A
ADDITIONAL REQUIREMENTS		N/A	

[ADDITIONAL OUTPUT PLUG OPTIONS ARE AVAILABLE BY CLICKING THIS LINK.](#)
[STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE BY CLICKING THIS LINK](#)

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC

6. LABEL:

MATERIAL	FLAT THERMAL TRANSFER, IMPRINTABLE, POLYESTER SHEET
BACKGROUND COLOR:	COOL GRAY PANTONE # 11C
TEXT COLOR:	WHITE OR SILVER
LABEL WIDTH: (mm)	39.6 mm
LABEL HEIGHT: (mm)	59.6 mm




AVAILABLE UPON REQUEST

ACTUAL POSITIONING OF SYMBOLS AND TEXT IS SUBJECT TO CHANGE AT TIME OF MANUFACTURE











XXXXX → JAPAN IMPORTER'S NAME

PENDING →






GlobTek® ,Inc.
ITE POWER SUPPLY (电源供应器)

P/N(料号): TR9CD2000LCP-N(RV)
MODEL(型号): GT-41082-1809-T3
INPUT(输入): 100 - 240V ~ ,
50 - 60Hz , 0.6A
OUTPUT(输出): 9V === 2.0A
FOR I.T.E.USE ONLY

Pour matériel de informatique technologique
N4292
Q041779

EFFICIENCY LEVEL 

RoHS

WWYY **MADE IN CHINA** (中国制造)

GlobTek, Inc.
www.globtek.com

186 Veterans Drive, Northvale, NJ 07467
Tel. 201-784-1000 Fax 201-784-0111

Drawing Title: SWITCHING POWER SUPPLY, UNIVERSAL INPUT

18 WATTS, 9.0 VOLTS @ 2.0 AMPS

MODEL NO: GT-41082-1809-T3

PART NO: TR9CD2000LCP-N(RV)

REV B

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC

7. PACKAGING:

GIFT BOX SIZE:

110 x 57 x 70mm

GIFT BOX COLOR:

WHITE

CARTON SIZE:






450 x 295 x 285mm

QUANTITY PER CARTON:

60 (20*4)

G.W.

15.6 kgs



GlobTek, Inc.
www.globtek.com

186 Veterans Drive, Northvale, NJ 07467
Tel. 201-784-1000 Fax 201-784-0111

Drawing Title: SWITCHING POWER SUPPLY, UNIVERSAL INPUT

18 WATTS, 9.0 VOLTS @ 2.0 AMPS

MODEL NO: GT-41082-1809-T3

PART NO: TR9CD2000LCP-N(RV)

REV B

CHINA RoHS SELF DISCLOSURE TABLE

有毒有害物质或元素名称及含量标准形式 Name and concentration of hazardous substance or element in product						
零件名 Name of part	剧毒有害物质或元素 Hazardous substance or element					
	铅 Pb	汞 Hg	镉 Cd	六价铬 Cr(VI)	多溴联苯 PBB	多溴二苯醚 PBDE
Diode (ITO-220AB) 二极管	X	○	○	○	○	○
SMD resistor SMD 电阻	X	○	○	○	○	○
SMD Diode SMD 二极管	X	○	○	○	○	○
PLUG 直流输出端子	X	○	○	○	○	○
AC PIN 交流输入端子	X	○	○	○	○	○

○: 表示该有毒有害物质在这部件中所有同质材料中的含量均在SJ/T 11363-2006规定的限量要求以下。
 ○: refers to the concentration of this hazard substance in the all homogenous materials in this part is below the concentration limit as stipulated in the standard SJ/T 11363-2006.

X: 表示该有毒有害物质至少在这部件中的某一同质材料中的含量超出 SJ/T 11363-2006规定的限量要求。
 X: refers to the concentration of this hazard substance at least in a homogenous material is higher than the concentration limit as stipulated in the standard SJ/T 11363-2006.