
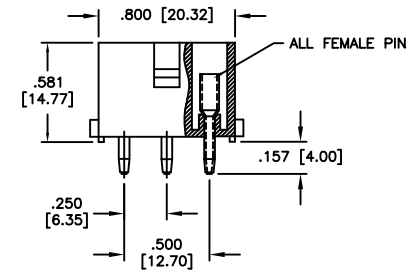
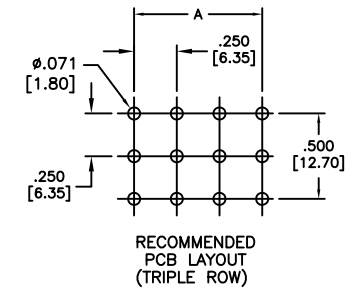


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/20	

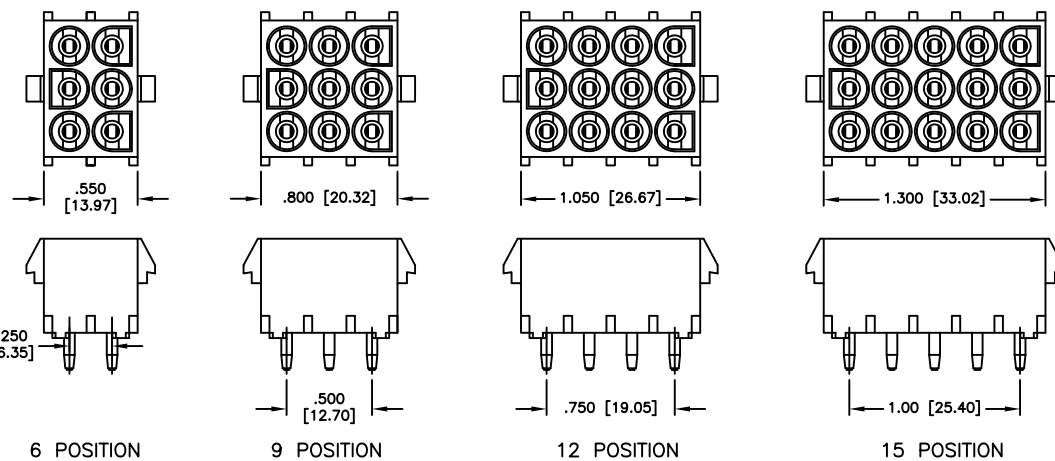

**SPECIFICATIONS:**

Material:  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: Natural  
 Contacts: Phosphor Bronze, Tin plated  
 Electrical:  
 Current rating: 06~15P: 9 Amp Max (With UL1007, 16AWG)  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1,000M ohms min  
 Dielectric withstanding voltage: 2,900 VAC for 1 minute  
 Temperature Rating:  
 -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.



$A = .250 [6.35] \times \text{No. of Spaces}$

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	$\pm .10$	$\phi.X$	$\pm .10$
.XX	$\pm .020$	$\phi.XX$	$\pm .015$
.XXX	$\pm .015$	$\phi.XXX$	$\pm .010$

**ADAM TECH INTERCONNECTS**  
 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	LH	2/21/20
CHECKED	AY1	2/21/20
APPROVED		

TITLE WIRE TO BOARD, FEMALE, 6.35mm PITCH, WITHOUT POLARIZING PEG, FEMALE PIN			
SIZE X	PART NO. DME-F-XX-S2-SQ	REV. -	
REF:	S00124T	SCALE: NTS	SHEET 1 OF 1