


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	A	RELEASED PER NPR	18 JAN 06	CSV JD

- 1. MAXIMUM CONNECTOR INSERTION LOSS IS 2.0dB PLUS CABLE ATTENUATION OF 3.0dB/km AT 1300nm (SEE TABLE)
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF THE TYCO ELECTRONICS STANDARD 230-702

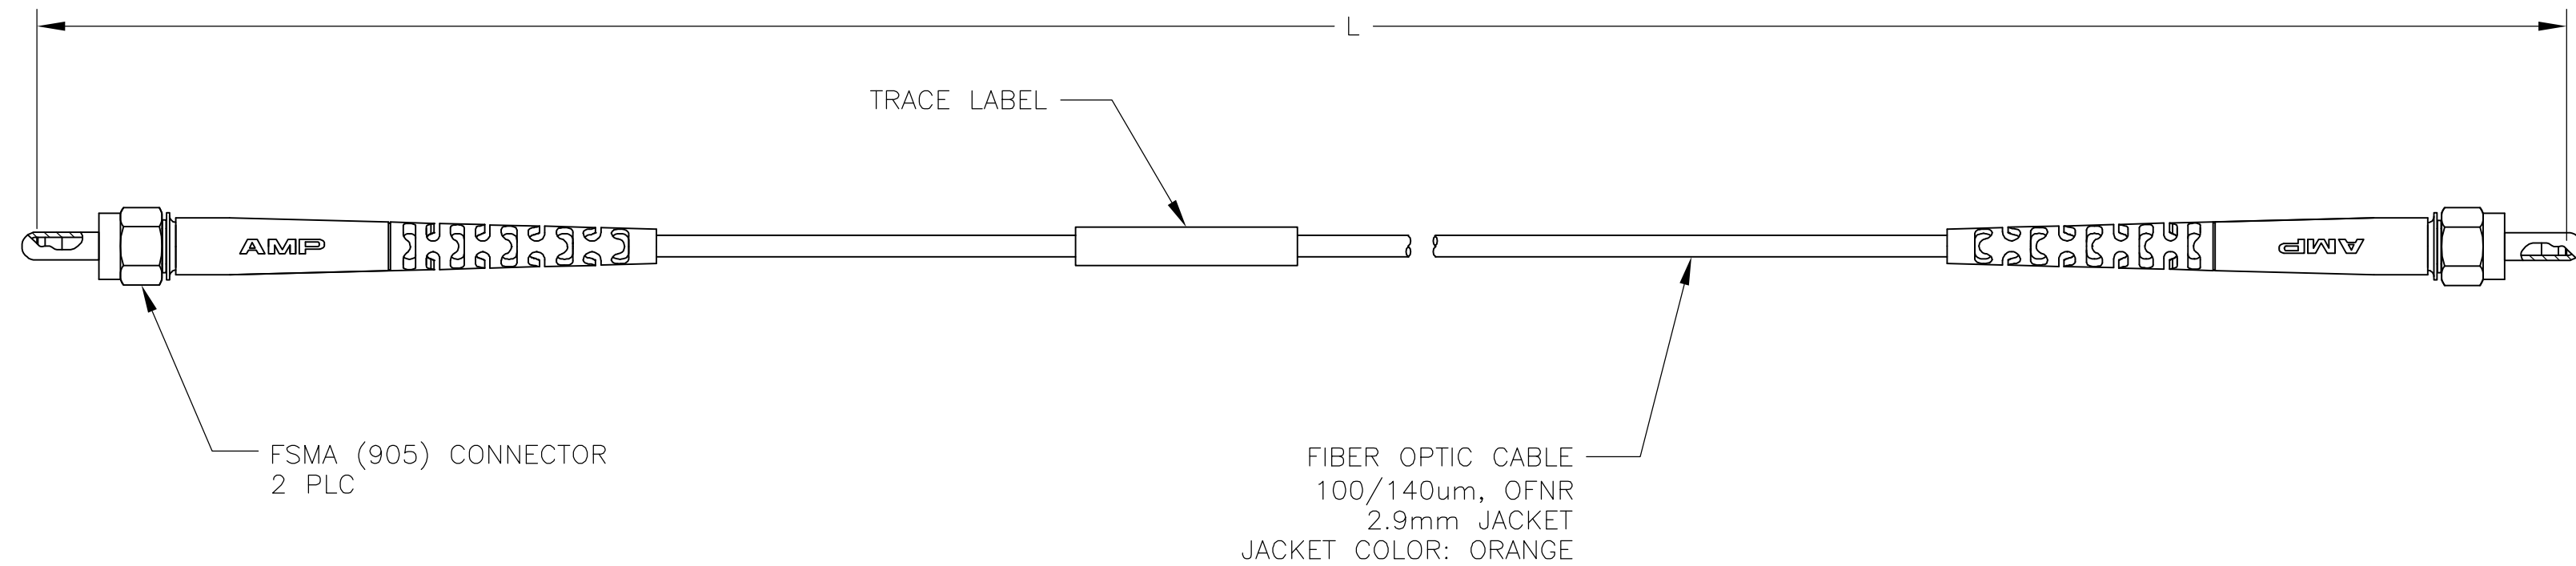

2.04	15.24±0.30 [600.0±11.8]	5502150-8
2.02	6.10±0.08 [240.2±3.2]	5502150-7
2.14	45.72±0.46 [1800.0±18.0]	5502150-6
2.03	10.00±0.15 [393.7±5.9]	5502150-5
2.02	6.00±0.08 [236.2±3.2]	5502150-4
2.02	5.00±0.08 [196.9±3.2]	5502150-3
2.01	3.00±0.05 [118.1±2.0]	5502150-2
2.00	1.00±0.05 [39.4±2.0]	5502150-1
MAX IL (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 18 JAN 06	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 18 JAN 06	NAME CABLE ASSEMBLY, FIBER OPTIC, 100/140 FSMA (905) TO FSMA (905)	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		APVD J.DUNCAN 18 JAN 06	RESTRICTED TO	
MATERIAL		PRODUCT SPEC	SIZE A2	CAGE CODE 00779
		APPLICATION SPEC	DRAWING NO 5502150	SCALE NTS
		WEIGHT	SHEET 1 of 1	REV A
		CUSTOMER DRAWING		