

# SH-Z0013 - Connector component



1008162

<https://www.phoenixcontact.com/pc/products/1008162>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Insert sleeve for data element, series SH and SB, type of contact: pin and socket.  
Note: The item may only be used in the corresponding PxC products, SH-8EPC5..., SH-8ESC5...  
, SH-8EPD6..., SH-8ESD6..., SB-8EPC..., SB-8ESC...

## Commercial data

Item number	1008162
Packing unit	100 pc
Minimum order quantity	300 pc
Product key	ABRCDU
GTIN	4055626689593
Weight per piece (including packing)	1.424 g
Weight per piece (excluding packing)	1.404 g
Customs tariff number	39269097
Country of origin	DE

## Technical data

### Notes

#### Safety note

Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• Only use tools recommended by Phoenix Contact</li><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li><li>• Operate the connector only when it is fully plugged in and interlocked.</li><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li><li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li></ul>
-------------	--

# SH-Z0013 - Connector component



1008162

<https://www.phoenixcontact.com/pc/products/1008162>

## Product properties

Connection profile	6+4+4+PE
Application	Hybrid
Series	SH
Shielded	yes

## Material specifications

Housing material	Metal
------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 115 °C
---------------------------------	-------------------


# SH-Z0013 - Connector component

1008162

<https://www.phoenixcontact.com/pc/products/1008162>

## Drawings

Diagram

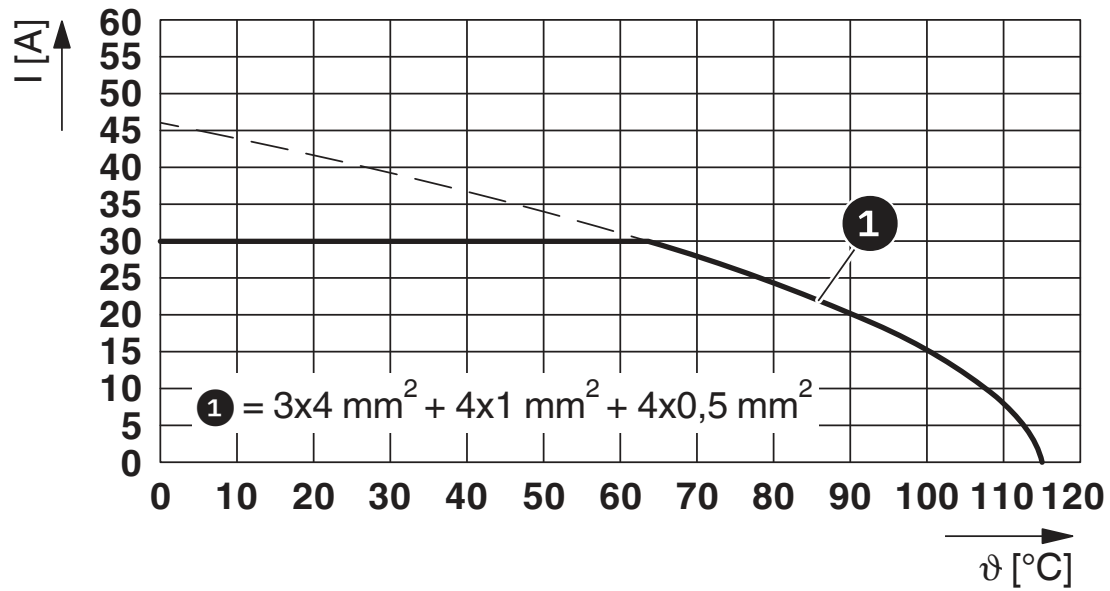

$I$  = current strength,  $\vartheta$  = ambient temperature, power contacts A-C: 3 x up to 30 A, signal contacts: 4 x 2 A constant, data contacts: 4 x 1 A constant

# SH-Z0013 - Connector component



1008162

<https://www.phoenixcontact.com/pc/products/1008162>

## Classifications

### ECLASS

ECLASS-11.0	27440312
ECLASS-12.0	27440312
ECLASS-13.0	27440312

### ETIM

ETIM 8.0	EC002641
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SH-Z0013 - Connector component



1008162

<https://www.phoenixcontact.com/pc/products/1008162>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)