

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

HEYbrid™ Stainless Steel Liquid Tight Cordgrips

Straight-Thru, Metric Hubs

Don't get SKU'ed: More Cable Range, Fewer SKU's –
Genetically engineered to destroy your inventory monster!
The Ultimate in Liquid Tight Strain Relief Protection






CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or IEC	PART DIMENSIONS									
Minimum		Maximum					A	B	C	D		E				
in.	mm.	in.	mm.			Clearance Hole Dia.	Max. O.A. Length	Thread Length	Thickness	Wrenching Nut Flat Size						
HEYCo-molded Finger/Gland																
.065	1,7	.210	5,3	M6060	RSSCG M12	cULus	.473	12,0	1.23	31,2	.34	8,6	.20	5,1	.75	19,1
.115	2,9	.250	6,4	M6061	SSCG M12											
.065	1,7	.230	5,8	M6062	RSSCG M16	cULus	.630	16,0	1.31	33,3	.34	8,6	.20	5,1	.88	22,4
.105	2,7	.315	8,0	M6063	SSCG M16											
.095	2,4	.290	7,4	M6066	RSSCG M20	cULus	.787	20,0	1.58	42,9	.42	13,5	.20	5,1	1.06	26,9
.170	4,3	.450	11,4	M6067	SSCG M20											
.180	4,6	.400	10,2	M6068	RSSCG LL M20	cULus	.787	20,0	1.70	43,2	.42	10,7	.20	5,1	1.25	31,8
.260	6,6	.545	13,8	M6069	SSCG LL M20											
.250	6,4	.490	12,4	M6070	RSSCG M25	cULus	.985	25,0	1.91	48,5	.53	13,5	.20	5,1	1.31	33,3
.435	11,0	.705	17,9	M6071	SSCG M25											
.490	12,4	.785	19,9	M6072	RSSCG M32	cULus	1.260	32,0	2.19	55,6	.59	15,0	.20	5,1	1.75	44,5
.590	15,0	1.000	25,4	M6073	SSCG M32											

- HEYCo-molded gripping finger/gland technology accommodates the **widest cable range** over the **fewest sku's**.
- Rolled grease-free threads **prevent galling** and allow for multiple assemblies and disassemblies. No messy, unsightly thread lubrication required.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- Typical applications: Control cabinets, marine, car washes, hot tubs, instrumentation, carpet cleaning machines, food processing equipment, underground for direct burial or submersed up to 130 ft. (70 PSIG).
- Ideal for corrosive environments.
- Constructed from corrosion resistant 303 stainless steel.
- Resistant to salt water, acids and most chemicals.
- Locknuts not included. To order locknuts separately, see page 3-48.
- Patent pending.
- DFARS Compliant



The HEYCo-molded Finger, Gland & Seat

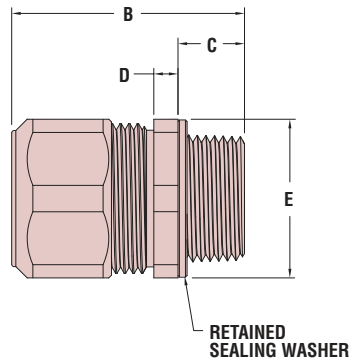

Material	303 Stainless Steel Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 cULus Recognized under Underwriters' Laboratories File E51579
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)
IP Rating	IP68 (70 PSI, 5 BAR)

Quick Specs