




Electrical specifications

	COM—CH1	COM—CH2	COM—CH3	COM—CH4
Frequency Range:	2350-2360 MHz	2496-2690 MHz	2110-2200 MHz	617-652 MHz
Insertion Loss:	≤1.0dB	≤1.0dB	≤1.0dB	≤1.0dB
Return Loss:	≥15dB	≥15dB	≥15dB	≥15dB
Isolation:	≥50dB@CH2, CH3,CH4	≥50dB@CH1, CH3,CH4	≥50dB@CH1, CH2,CH4	≥50dB@CH1,CH2, CH3
Power handling:	50 Watts per channel			
Dimensions:	4.65 X 4.1 X 2.29 in.			
Port Connectors:	N-type-Female (50Ω)			
Size Tolerance:	As Below(±0.3mm)			

Outline Drawing:

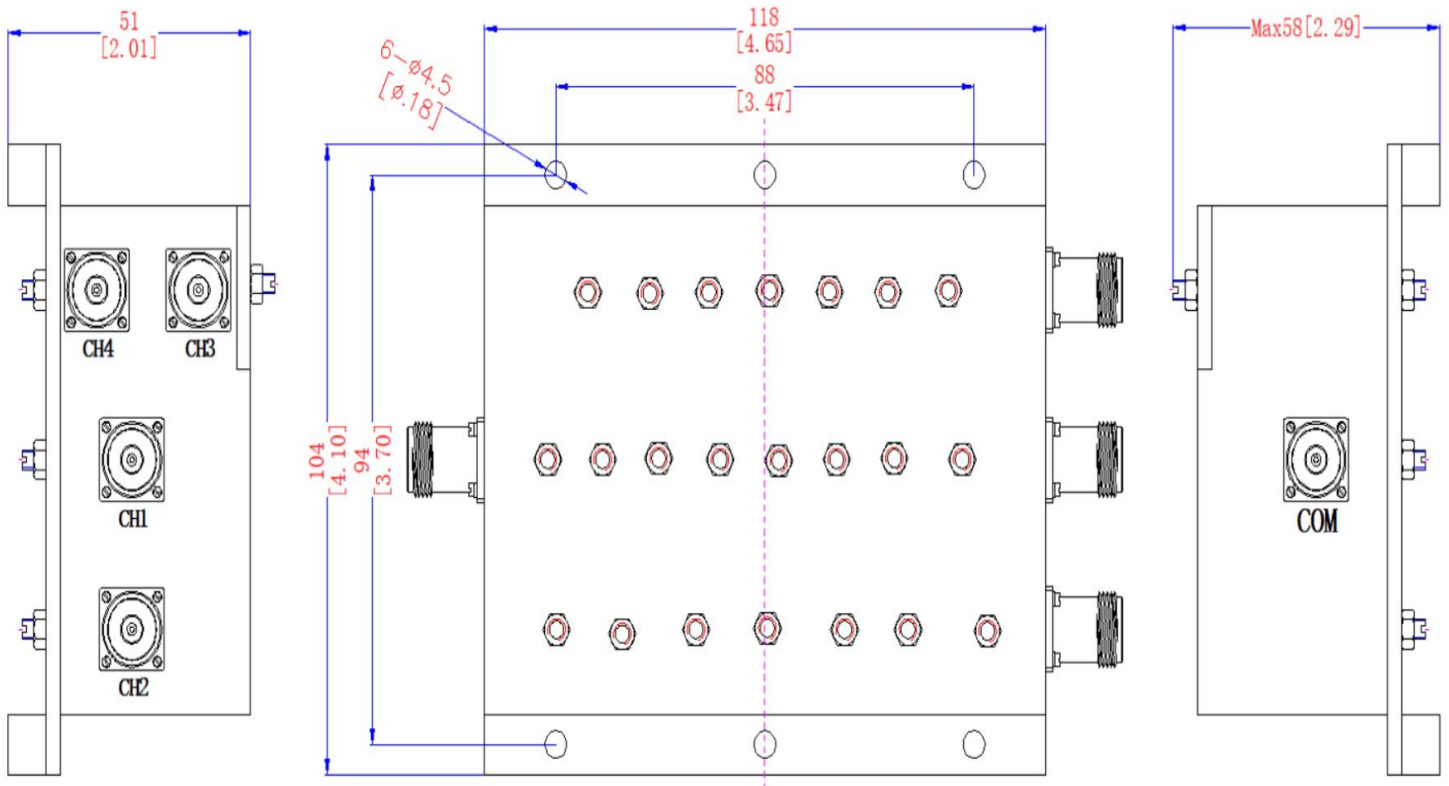

2 decimal places: +/-0.01 inches [+/-0.3mm]
3 decimal places: +/-0.005 inches [+/-0.13mm]
Angles: +/-1 Deg.

When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.