



Customer Signature:

Unit: MM

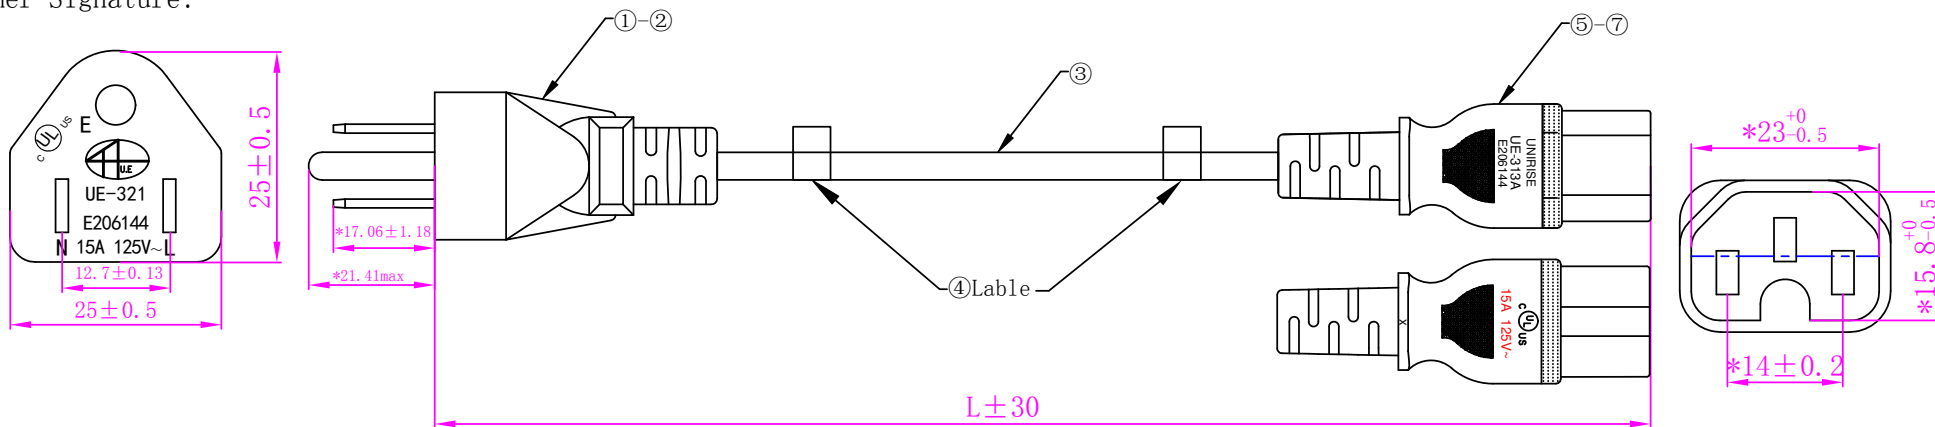

CORD MARKING:

E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm² (14AWG) Or
 C(UL) SJT FT1 105°C 300V 3x2.08mm² (14AWG) UNIRISE

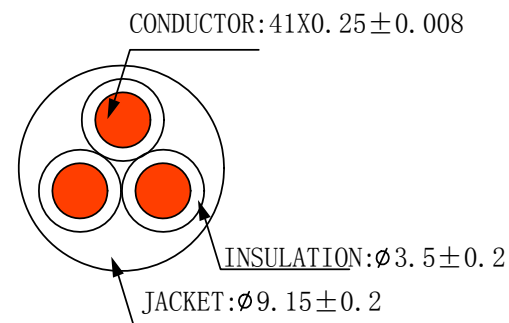


Technical Requirements:

1. Plug: a. UE-321, Current (A) :15, Voltage (V) 125, Approved: UL
 b. UE-313A, Current (A) :15, Voltage (V) 125, Approved: UL
2. Cord: SJT 3X14AWG 105°C unrise Press Word Approved: UL
3. High Voltage Test: Cable: at 2000V/S = No sheath break, No shortcircuit
4. No nick, spot, mottle on appearance and wording is clearly
5. The All Material Compliance with RoHS and REACH

Product UE-321+UE-313A / SJT 3X14AWG 105°C UE/Press word

Items	Part Number	Description	Color	Q' TY
1	DX334	Blade of UE-321	White	2PCS
2	BX116000	PVC of plug 60P UE-334	/	/
3	CX91214322-2	SJT 3X14AWG 105°C	/	1PCS
4	---	Length Lable	/	2PCS
5	316313903	Blade of UE-313A	/	3PCS
6	316313220	Shell of UE-313A	/	1PCS
7	BX116000	PVC of plug 60P UE-313A	/	/

PWCD-515PC15-15A-XXF-YYY					
Customer		Customer Drawing No.			
Customer Part No.		Sample Part No.			
Application		Remark			
Basis	Mail				
					
Approved by	Songyu	Checked by	Wangkuihua	Drawn by	Yanjiale
					2022/4/16