


COIL: @ 25°C	
WINDING #1	WINDING #2
975 OHMS ±10%	975 OHMS ±10%
8.8 mADC MUST OPERATE	8.8 mADC MUST OPERATE
16.0-29.0 VDC NOM. VOLTAGE	16.0-29.0 VDC NOM. VOLTAGE
ENVIRONMENT:	
VIBRATION <u>10</u> CPS TO <u>3000</u> CPS @ <u>30</u> g's	
SHOCK <u>150</u> g's <u>11</u> MS. DURATION	
TEMPERATURE <u>-65</u> °C TO <u>+125</u> °C	
NOTES: <u>SET AND RESET TIME 4 MS MAX.</u>	
<u>CONTACT BOUNCE 2 MS MAX.</u>	

CUSTOMER DATA SHEET

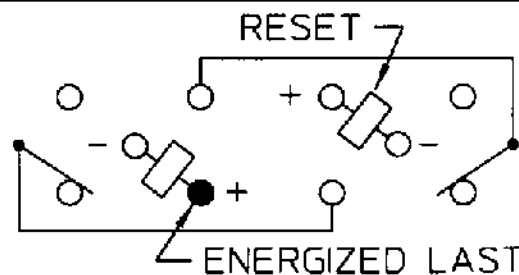

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/24/98 *CR 3/25/98 RB*



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "3SAM" RELAY

3SAM6015M2