


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


| REVISION |   |          |          |
|----------|---|----------|----------|
| REV      | DESCRIPTION   | DATE     | APPROVED |
| A        | INITIAL RELEASE, RFS.2903, EMS                              | 01/22/04 | BS       |
| B        | REDRAW PICTURE, RFS.4172, DMR                               | 08/03/04 | BS       |
| C        | CORRECT RATING, RFS.4333, EM                                | 08/25/04 | BS       |
| D        | ADD ROHS, RFS.14726, EM                                     | 10/02/08 | BS       |
| E        | REVISE PLUG DRAWING TO SHOW HALF-INSULATION, RFS. 23294, EM | 08/07/12 | HM       |

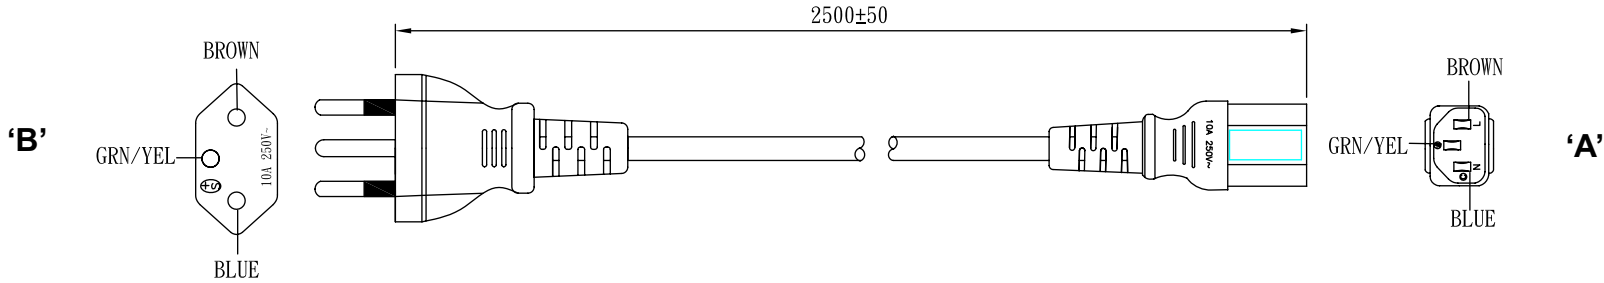

**GENERAL SPECIFICATIONS:**


RATING: 10A / 250 V AC  
 CABLE TYPE / SIZE: H05VV-F, 3 X 1.0 mm<sup>2</sup>  
 TEMPERATURE RATING: 70° C  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2500 ± 50 mm  
 CABLE OUTER DIAMETER: 7.0 ± 0.2 mm  
 END 'A' TERMINATION: IEC 320/C13 (EL 701)  
 END 'B' TERMINATION: SWISS TYPE ACCORDING TO SEV 1011 ( EL 203)  
 APPROVALS PLUG: SEV  
 APPROVALS CONNECTOR: SEV

**PLUG END VIEW**

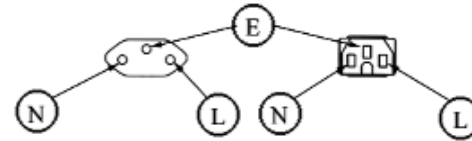

**PACKING:**


HANKED  
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

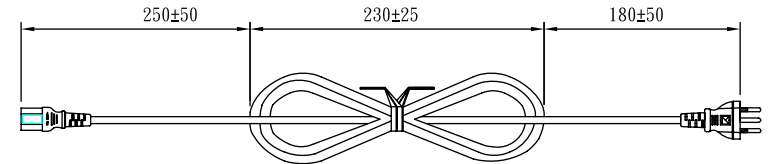

**NOTES:**

1. CONTINUITY TEST REQUIRED FOR E-E,L-L,N-N.
2. HIPOT TEST AT 1200 VAC FOR 1 SECOND REQUIRED BETWEEN EACH CONDUCTOR (9L-N,L-E,N-E).
3. STRAIN RELIEF PULL TEST BOTH ENDS AT 22 LBS (100N) FOR 5 SECONDS.  
 CABLE MUST NOT DISPLACE MORE THAN 1 mm.
4. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



| DASH NO.                      | PART NO | REV.  | DESCRIPTION | NOTES   |
|-------------------------------|---------|---|-------------|---|
| <b>TABULATION BLOCK</b>       |         |   |             |   |
|                               |         | <b>TOLERANCES:</b><br>DECIMALS ANGULAR<br>.xx +/- 0.1 +/- 1°<br>.xxx +/- .005 |             |  <b>GlobTek, Inc.</b><br>www.globtek.com<br>186 Veterans Dr. Northvale, NJ 07647<br>Tel. 201-784-1000 Fax 201.784.0111 |
|                               |         | <b>MILLIMETERS ANGULAR</b><br>.xx +/- 0.3 +/- 1°<br>.xxx +/- .013             |             |   |
| INIT.BY: EM<br>DATE: 01/22/04 |         | DWG TITLE: SWISS DETACHABLE CORDSET   |             | REV.<br>E   |
| DRAWN: NF<br>DATE: 01/22/04   |         | FSCN No.: G, CC<br>SIZE: A  |             |   |
| APRVD: DMR<br>DATE: 01/22/04  |         | SCALE: NONE<br>PART NO: <b>23214272M5701(R)</b>                               |             |   |
| SHEET 1/1                     |         |   |             |   |

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice